SCIENTIFIC AMERICAN

[Entered at the Post Office of New York, N. Y., as Second Class Matter. Copyright, 1904, by Munn & Co.]

Vol. XC.—No. 6. ESTABLISHED 1845.] NEW YORK, FEBRUARY 6, 1904. [5 CENTS A COPY $3.00 A YEAR.

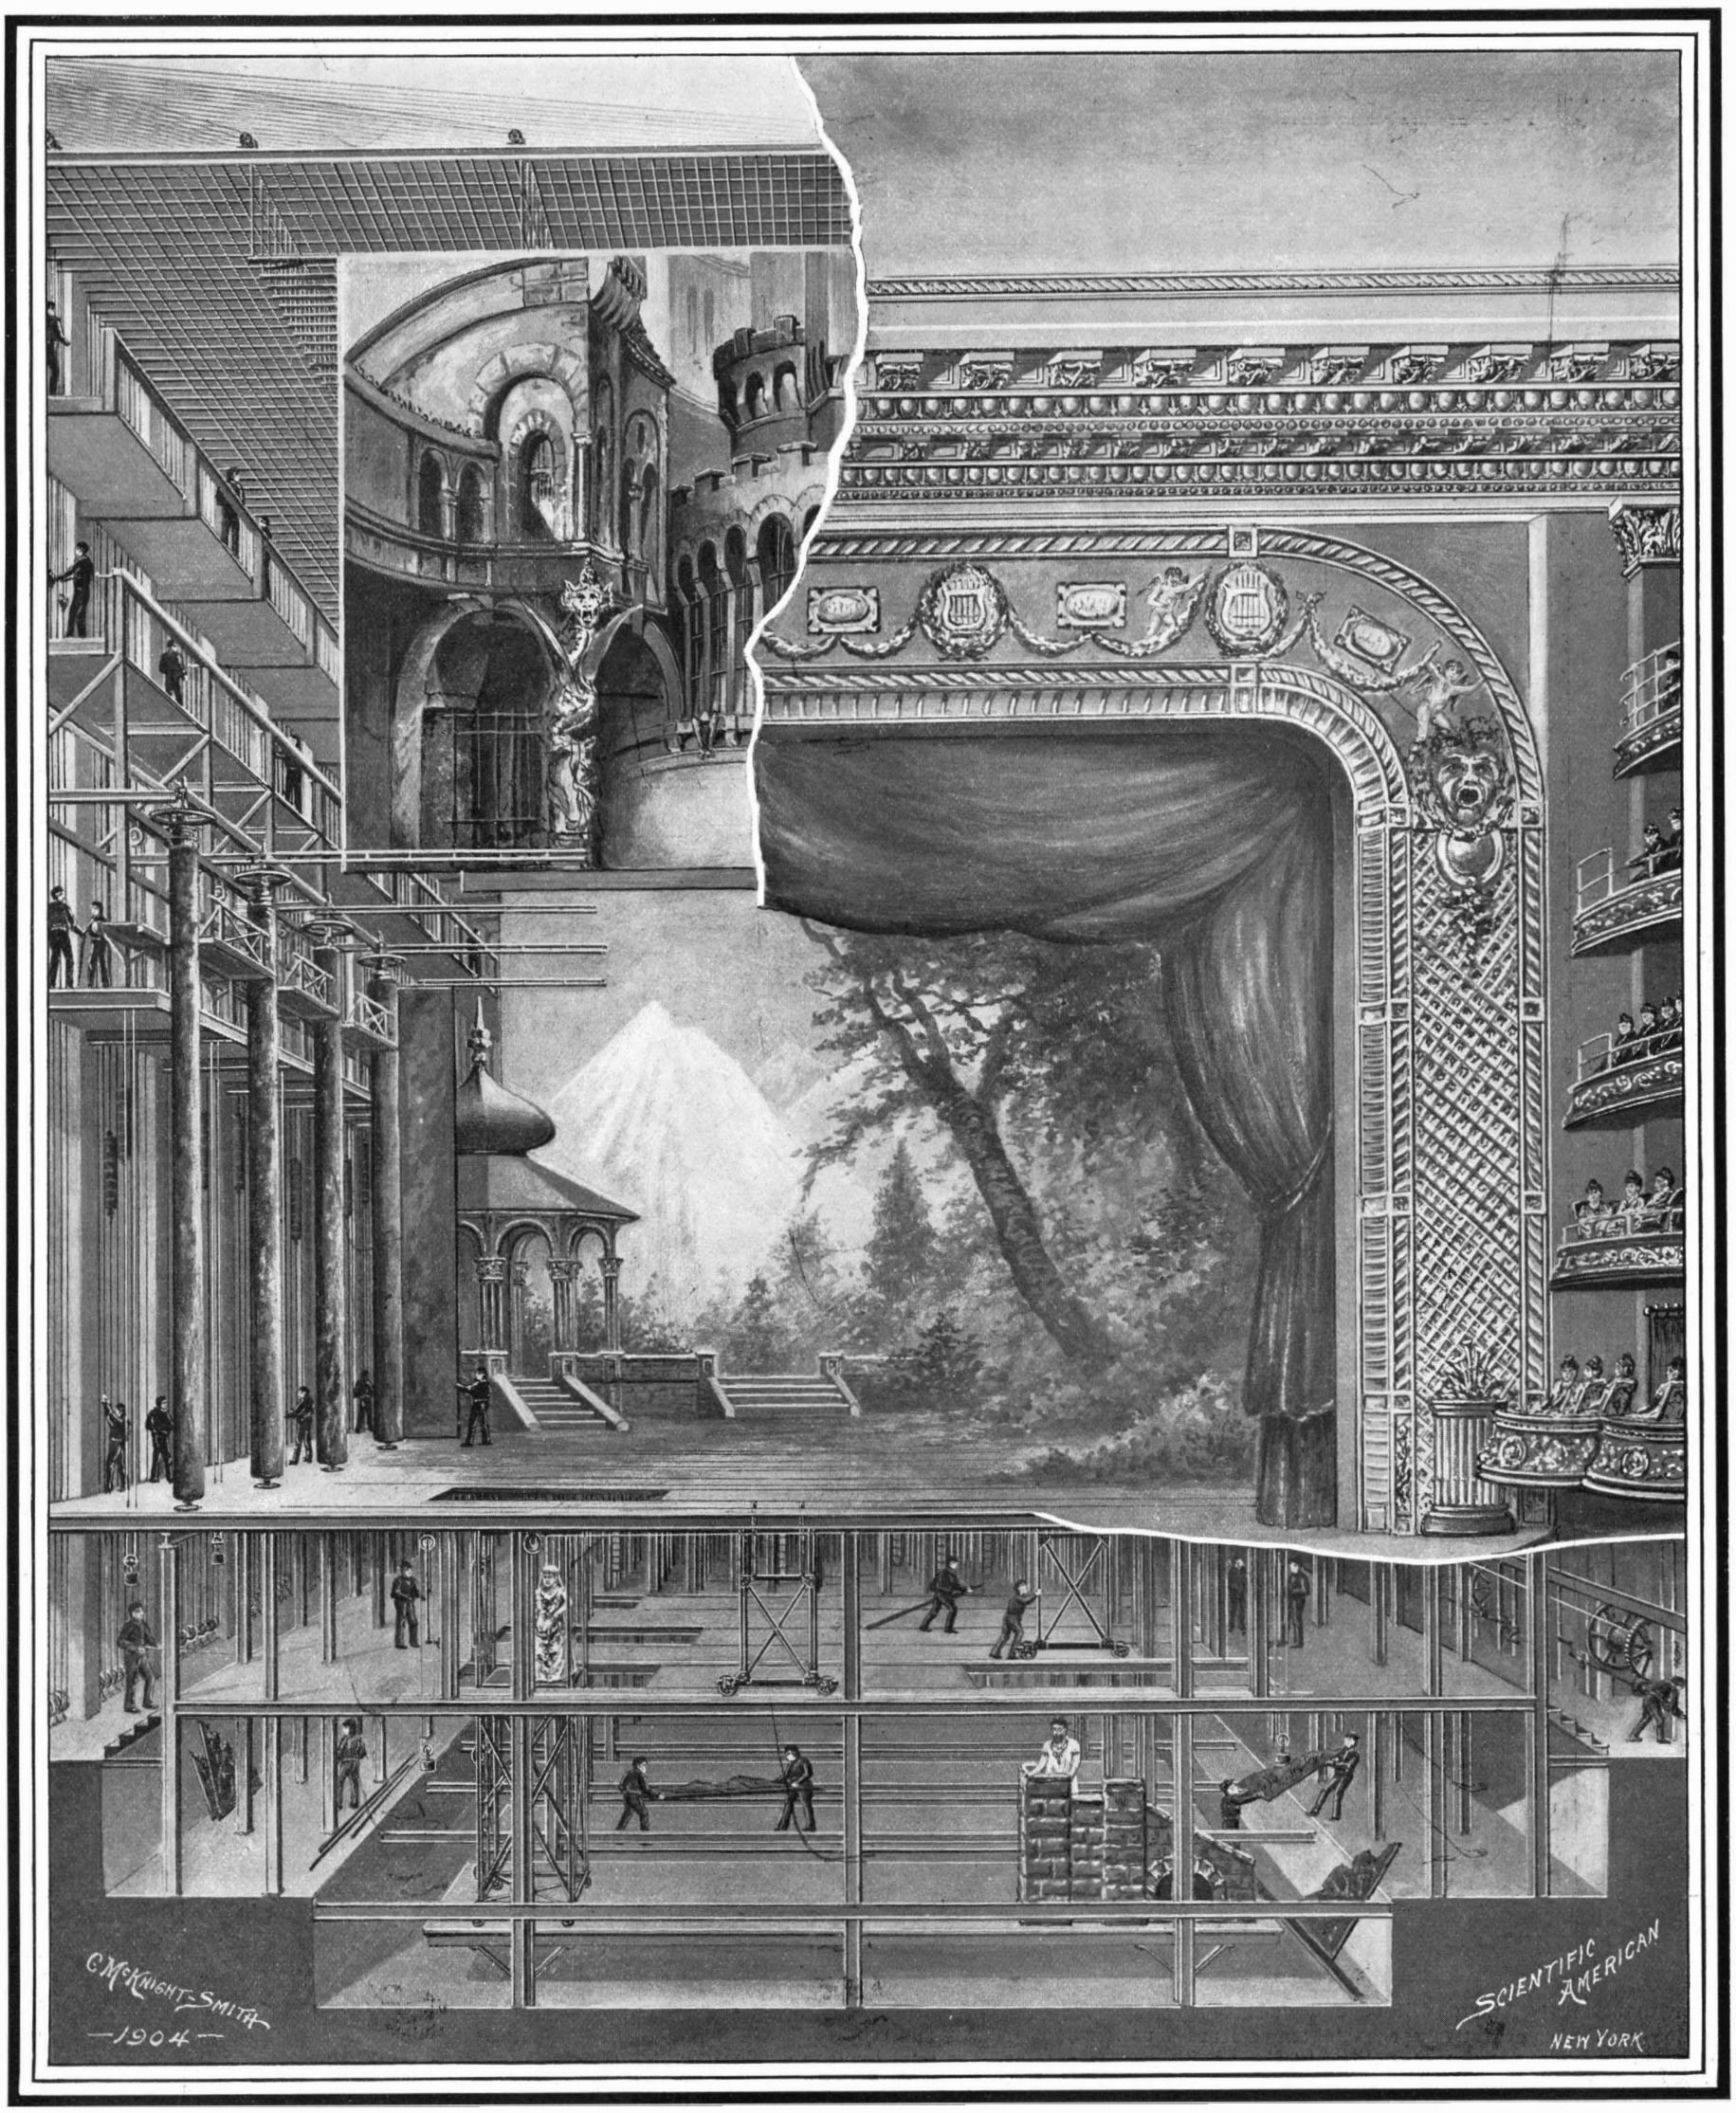

Working Drop Scenes. Moving Panoramas. Drop Scene, Klingsor's Tower is aloft. Movable Trap on Bridge. Section of Klingsor's Tower, lowered into the cellar by a movable bridge. Bridge Winches.

Set Scene, Klingsor's Magic Palace and Enchanted Garden.

THE NEW STAGE OF THE METROPOLITAN OPERA HOUSE, REBUILT FOR THE PRODUCTION OF "PARSIFAL."—[See page 117.]

The stage is divided into sections, the floor is removable and its place can be taken by **"bridges," which can be raised to the level of the stage, carrying set scenery.** The wing scenes are operated **from the cellar.**

© 1904 SCIENTIFIC AMERICAN, INC.

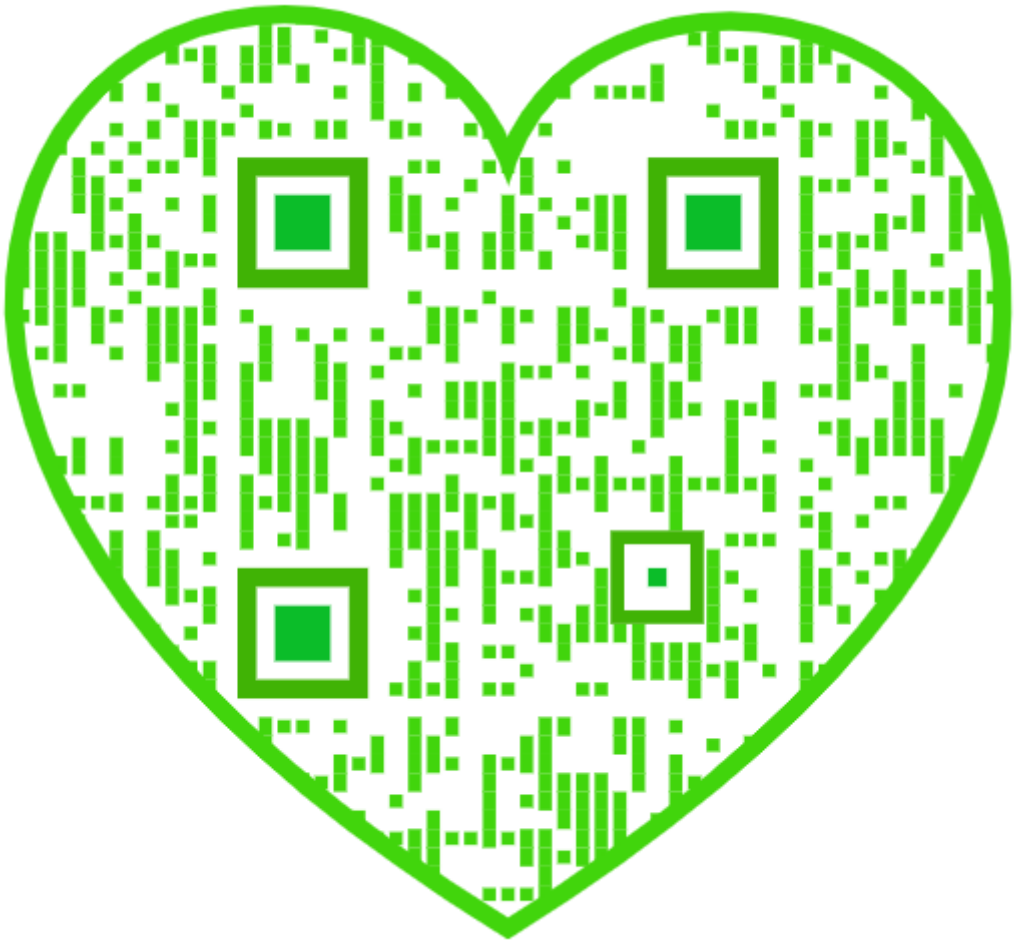

SCIENTIFIC AMERICAN

ESTABLISHED 1845

MUNN & CO., - - Editors and Proprietors

Published Weekly at

No. 361 Broadway, New York

TERMS TO SUBSCRIBERS

One copy, one year for the United States, Canada, or Mexico $3.00
One copy, one year, to any foreign country, postage prepaid. £0 16s. 5d. 4.00

THE SCIENTIFIC AMERICAN PUBLICATIONS.

Scientific American (Established 1845).....$3.00 a year
Scientific American Supplement (Established 1876) ..... 5.00 "
Scientific American Building Monthly (Established 1885)..... 2.50 "
Scientific American Export Edition (Established 1878)..... 3.00 "

The combined subscription rates and rates to foreign countries will be furnished upon application.

Remit by postal or express money order, or by bank draft or check.

MUNN & CO., 361 Broadway, New York.

NEW YORK, SATURDAY, FEBRUARY 6, 1904.

The Editor is always glad to receive for examination illustrated articles on subjects of timely interest. If the photographs are *sharp*, the articles *short*, and the facts *authentic*, the contributions will receive special attention. Accepted articles will be paid for at regular space rates.

NEAR COMPLETION OF THE FIRST HUDSON RIVER TUNNEL.

During the past eighteen months the work of completing the first Hudson River tunnel has made such rapid progress that only about one hundred yards remains to be excavated, before the Manhattan heading is reached. Some time in March it is likely that the officials of the New York and Jersey Railway Company will be able to make the trip—on foot, of course—from Manhattan to New Jersey below the bed of the Hudson River. Now that the ledge of rock which was encountered a few months ago, not far from the Manhattan shore, has been cut through, the shield is being driven forward at a speed that is remarkable for this class of excavation, as much as 26 feet having been covered in the twenty-four hours. A little to the south of and parallel with the tunnel that is now nearing completion, is the second tunnel, the excavation of which commenced in November of last year. The new shield that is being used on this work will progress very much faster than did the old shield, and this for several reasons. In the first place, the diameter is considerably less, and therefore the number of cubic yards to be taken out in a given distance is reduced; secondly, the excavation is taking place entirely through silt, with no rock to hinder progress; and, thirdly, the shield itself is of more modern design, more convenient to handle, and is fully seventy per cent more powerful. Already it has been pushed forward more than 1,300 feet beneath the river, and it is likely the average estimated speed of 30 feet per day will be realized if no unforeseen contingency arises.

CORROSION OF ARCHITECTURAL STEEL.

Although the report of the Insurance Experiment Station in Boston on its recent tests of steel corrosion, under conditions approximating those of steel columns in modern buildings, confirms the results of previous tests of this character, the subject is of such supreme importance that we give herewith a brief digest of the facts. Of course, the value of such experiments depends upon the correctness of the assumption that a severe trial of a short duration gives us the data from which we can argue as to the results of a less severe test, extending over a far greater period. Each specimen of steel was cleaned and incased in Portland cement concrete of varying composition. After the concrete had set for twenty-four hours in air and seven days in water, the specimens were exposed to as severe tests as could be devised, and after various lengths of time the cement casings were broken, and the steel specimens were cleaned, weighed, and measured. The conclusion is reached that if structural steel is incased in a sound covering of good concrete, it is proof against corrosion for a period of years which is so long as to make the subject of more interest to our great-grandchildren's children than to us. In other words, steel, properly covered with concrete, may be expected to last until changes in the laying out of the city, or the substitution of yet more modern construction, necessitates the removal of the building. Obviously, the life of the costly office buildings, hotels, and warehouses that are being erected in such profusion, depends not so much upon the work of the steel-maker, as upon the particular "boss" who has to watch the mixing of the cement and its application to the skeleton steelwork.

EQUABLE TEMPERATURE IN THE SUBWAY.

To those who have a natural prejudice against subway or tunnel travel, there will be a decided compensation in the comparatively equable temperature that will prevail in the New York Subway. During one of the waves of extreme cold that visited the city this winter, the chief engineer had the temperature taken at stated intervals at the street level and in the tunnel below. It was found that on January 5, when the thermometer on the street near the City Hall was one degree above zero, in the Subway below it registered 41 degrees. On the day previous, at nine o'clock in the morning, when the street temperature was 7 degrees in City Hall Park, it was 40 degrees in the Subway below. Other tests showed that when outside temperature fell anywhere below 32 degrees, it averaged about 40 degrees in the tunnel. On the other hand, it has been found that the average temperature of the tunnel in the summer time is about 65 degrees. It is scarcely necessary to explain that the sudden changes of temperature which mark the climate of New York city have not sufficient time to affect the envelop of steel, concrete, and earth surrounding the tunnel, before there is a return to normal conditions. During the winter there must necessarily be a gradual fall of the average temperature in the tunnel; but cold air that is carried in through ventilating openings and at station entrances is compensated for by the radiation of heat from the warm mass of the ground through which the tunnel is cut. In the summer time, the heat that enters the tunnel is absorbed by the same medium; and the indications are that there will be an average difference of 20 degrees between the street and the tunnel temperatures throughout the year.

AN IMPERIAL FLOATING EXHIBITION.

A movement is on foot in Great Britain to institute a moving exhibition, which will at once remind American readers of our exhibition railroad cars, which are occasionally sent out for the purpose of introducing the natural resources of some particular State to the country at large. The scheme referred to is to dispatch a steamer loaded with specimen products of British industries on a tour of the world, the itinerary providing for a call at thirty-two colonial and foreign ports. It is expected that the exhibition will fulfill the double purpose of enabling buyers through the world to personally inspect the manufactured goods of Great Britain, and of bringing the representative of each exhibiting firm in contact with prospective customers and giving them an opportunity to learn in detail what are their peculiar requirements. The itinerary of the steamer includes the ports of Africa, India, Ceylon, Straits Settlements, China, Japan, Australasia, South America, West Indies, and Canada. It is estimated that the round-the-world trip will last about seven months. Although the idea of a floating exhibition on such an ambitious scale is novel, the broad principle is one that is already recognized in this country, and our merchants and commercial bodies will do well to keep in touch with the movement, and ascertain from the American Consul at each port how far it fulfills its purpose.

RELATIVE STRENGTH OF THE NAVAL POWERS.

The navies of the world are in a state of such progressive development, that it is difficult at any given time to state exactly what is their relative strength. In the case of two rival powers which have a number of battleships and armored cruisers under construction, it is quite possible that the balance of strength between the two depends entirely on the forwardness of the work on these new vessels. One nation may be building upon a methodical plan, which insures the delivery of so many vessels each year, while the other may be building in a desultory fashion; in the one case the new ships may be within a year of completion, in the other they may be two or three years behind time.

If we estimate the relative strength upon the basis of the total number of battleships, armored cruisers, and scouts—that is to say, all warships above 1,000 tons displacement—that are actually completed, we find that Great Britain comes first with a total of 201 ships completed, of 1,516,000 tons displacement; France second with 96 ships, of 576,000 tons displacement; Germany third with 73 ships, of 388,000 tons displacement; Russia fourth with 43 ships, of 315,000 tons displacement; United States fifth with 35 ships, of 295,000 tons displacement; Italy sixth with 38 ships, of 259,000 tons displacement; and Japan seventh with 31 ships, of 206,000 tons displacement. All of these navies, however, have a large building programme in hand; and taking them in their order, the names of the countries and the total tonnage of ships under construction are as follows: Great Britain, 351,000 tons; United States, 322,000 tons; France, 180,000 tons; Russia, 139,000 tons; Germany, 118,000 tons; Italy, 70,000 tons; and Japan, 10,000 tons.

Now it is evident that if these new ships could be completed at once, there would be a great change in the relative standing of the navies, for the United States has under construction a larger aggregate of tonnage than that of the whole of her completed navy as it stands to-day. The relative order of strength in such a case and the total tonnage displacement would be as follows: Great Britain, 1,867,000 tons; France, 756,000 tons; United States, 616,000 tons; Germany, 506,000 tons; Russia, 499,000 tons; Italy, 329,000 tons; Japan, 253,000 tons. It will thus be seen that the United States moves up from fifth to third position, with a long lead over Germany. It is interesting to note, by the way, the great preponderance of the strength of the English-speaking naval powers, Great Britain and the United States. In regard to the British navy, it is noteworthy that at her present rate of building she is greatly exceeding the mark of strength which she is popularly supposed to have set herself, namely, that her navy shall equal the combined strength of any two continental navies. As a matter of fact, were the present building programmes completed, her navy would equal in tonnage that of the three most powerful continental navies, France, Germany, and Russia, and would have 117,000 tons to the good at that; while a combination of the British and United States navies would give a total of 2,484,000 tons, which would be within 10,000 tons of equaling the total tonnage of all the other navies of note in the world, including that of Japan. On the side of the English-speaking combination, there would be the great advantages of a common tongue and great size and speed of individual ships, while a world naval combination would suffer from the enormous disadvantage of being heterogeneous in speech, race, and in the classification of its ships. We confess that while we had a general impression of the naval predominance of the English-speaking race, we were not prepared to find that the development of the navies of the two countries had so greatly outrun that of the rest of the world. To these considerations may be added the fact of the incalculable strategic advantage that the countries possess in a chain of coaling stations and dockyards scattered throughout the high seas, that would give them incomparable facilities of refuge, repair, and replenishment in the event of a world-wide conflict.

THE GRANTS OF THE CARNEGIE INSTITUTION.

The last annual meeting of the trustees of the Carnegie Institution was noteworthy for the fact that the sum of $200,000 was set apart for scientific research during the fiscal year of 1902-1903. The institution has been working silently since its inception, but none the less effectively. The grants which have been made may be considered as a most fitting recognition of scientific services rendered by the foremost living savants. Even he whose interest in science has made him familiar with the current work of many investigators, will doubtless find among the list of men who have thus been honored many whose names are unknown to him, but whose work is for all that worthy of encouragement.

It is impossible in this brief space to enumerate all the grants which have been made; for these, the reader must be referred to the last three numbers of the SCIENTIFIC AMERICAN SUPPLEMENT, in which all the awards are given, together with a brief abstract of the scientific work done by each investigator who has been honored.

We may be permitted, however, to call attention to a few scientists, the brilliancy of whose work has been bedimmed in the glamor of the more startling discoveries which have attracted the world's attention. Among the grants made to men who are not so well known to the world as they ought to be, may be mentioned that to Mr. Lewis Boss for investigations upon the motions of brighter stars, and of all stars of whatever magnitude supposed to have motions as great as ten seconds per century, and any other stars that were especially well determined prior to 1850. The sum of $5,000 awarded to him was not too much for so extensive an investigation. Prof. George E. Hale's grant of $4,000 was well spent on the photographic study of stellar parallaxes with a 40-inch telescope. When it is considered that 114 plates containing about 350 exposures have been obtained, some idea of the value of the work may be gleaned.

New tables of the moon are urgently required for the purposes of astronomy and navigation. For a long period the problem of constructing and perfecting such tables has been delayed by an unexplained discordance between the observed motion of the moon and the motion which should result from the action of all known bodies upon it. The exact cause of this discordance cannot be recorded, because the observations made from 1750 to 1850 have never been worked up and compared with the tables. By the aid of a grant from the Carnegie Institution, Prof. Simon Newcomb was enabled to take up this work with results that will be of benefit not only to science, but to commerce as well.

Among the larger grants, must be recorded that of $10,000 to Dr. Robert Fletcher, of the Army Medical Museum, for preparing and publishing the "Index Medicus." Established in 1879, under the direction of Dr. J. S. Billings and Dr. Robert Fletcher, the Index was discontinued in 1899 for lack of pecuniary support. The scope of the work is broad. It contains in classified form, month by month, reference to everything published throughout the world which relates to medicine or public hygiene.

It is particularly gratifying to note that Prof. H. N. Morse, of Johns Hopkins University, has been awarded

© 1904 SCIENTIFIC AMERICAN, INC.

$1,500 for researches on osmotic pressure. Although osmotic pressure has been recognized for twenty-five years as one of the great forces of nature, no direct measurements have been made to furnish an adequate experimental basis for the laws supposed to govern it. Prof. Morse has been engaged for several years in attempting to overcome the difficulties which lie in the way of quantitative measurement of osmotic pressure.

Not the least important of the chemical investigations carried out under the auspices of the Carnegie Institution was the determination of values of atomic weights by Prof. Theodore W. Richards, of Harvard University. Prof. Richards has submitted a memoir, about to be published by the Carnegie Institution, containing the records of his experiments on a new method of determining compressibility. By means of this method, the compressibility of bromine, iodine, chloroform, bromoform, and other substances has been determined over a range of 700 atmospheres.

One of the most important investigations which has been carried on through the munificence of the Institution is that of Prof. Durand, of Cornell University, on ship resistance and propulsion. Very gratifying progress has been made in the preliminary measurements, speeds having been determined from distance and time records in 444 cases, and thrust turning momentum determined by integration in 655 cases.

Lastly we must mention an award of $500 to Prof. Atwater, of Wesleyan University, for researches involving the direct determination of the amount of oxygen consumed by man for sustaining the bodily functions. Readers of this journal are doubtless familiar with the elaborate series of experiments conducted by Prof. Atwater with his respiration calorimeter, experiments which have cleared away many a doubt as to the relative nutritive values of various foods. The grant to Prof. Atwater has been expended chiefly for designing and constructing or purchasing apparatus for developing methods of determining oxygen and for tests and experiments made with the apparatus. An award of $6,000 to Dr. Gamgee was made for work in the same field, in order to prepare a report on the physiology of nutrition, which was the task assigned to him. He began by inspecting European laboratories and by visiting scientific men in Europe. It goes without saying that the work of Prof. Atwater formed not the least important subject of his studies.

CARROLL DAVIDSON WRIGHT.

BY MARCUS BENJAMIN, PH.D.

The time-honored custom of alternating the selection of a representative from the sections devoted to the physical sciences with one from the sections devoted to the natural sciences, for the presidency of the American Association for the Advancement of Science, failed to prevail at the Washington meeting held last winter, when a conspicuous departure from that practice was made by the election of a distinguished representative of the section on Social and Economic Science, whose eminence was sufficient to carry him without opposition into the highest office to which an American scientist can be chosen.

Carroll D. Wright is of worthy New England ancestry, being descended on the paternal side from early English colonists, and on his mother's side from the Davidsons, who were of Scotch blood. He was born in Dunbarton, N. H., on July 28, 1840, and received an academic education. His natural inclination would have led him to college, but he early began to teach, and with such success that he soon became the assistant principal of the Mount Cæsar Seminary, in Swanzey, where he also began the study of law.

The coming of the civil war was a serious event to the young men of New England, and Wright was quick to offer his services to his country, enlisting as a private in the Fourteenth New Hampshire Volunteers, of which in 1864 he became the commanding officer.

At the close of the war he returned to his chosen profession, and in 1865 he was admitted to the bar of Keene, N. H. He selected patent law as his specialty, and settled in Massachusetts. For ten years he devoted himself to the practice of his profession, in which he was thoroughly successful. Meanwhile, Col. Wright's marked influence over men was made conspicuous in his new home by his election, in 1871, to the Massachusetts Senate, in which body he served for three years, rendering valuable services, and especially as chairman of the Committee on Military Affairs.

His ability was so evident that it commended itself to the governor of Massachusetts, who in June, 1873, at the close of his senatorial career, appointed him chief of the Massachusetts Bureau of Statistics of Labor, which office he then held until 1888, also during that period taking the decennial census of Massachusetts in 1875 and again in 1885. In addition, he was supervisor of the United States census for the State of Massachusetts in 1880, and subsequently a special agent of that work to investigate and report on the factory system.

In January, 1885, he was called by President Arthur to the higher office of National Commissioner of Labor in Washington, which place he still holds, although he will soon retire to actively fill the presidency of Clark University, in Worcester, Mass., to which he was elected in 1902. In addition to the regular duties of his office, President Cleveland intrusted the completion of the eleventh census to him in 1893, in charge of which work he remained until 1897.

No event in recent years in the history of the United States is comparable in importance with the agreement made during the autumn of 1902, on the part of the coal miners of Pennsylvania on one hand and the operators on the other, to submit their differences to arbitration, and with this agreement Col. Wright had much to do. It may be well, however, to emphasize the fact that the many years of experience in treating similar matters in his annual reports had given Col. Wright a wide range of knowledge, and also it must be remembered that in 1894 he had had much practical experience, for he served as chief of a commission that was appointed to investigate the strike in Chicago during that year. It was therefore most natural, when the great strike in the coal regions of Pennsylvania began to be felt by the public, and the necessity of bringing it to an immediate end was apparent, that President Roosevelt at once turned to Col. Wright as the best and most competent intermediary. During the preliminary arrangements, Col. Wright was in constant consultation with the President, and on the creation of the Anthracite Strike Commission he became its recorder. He more than anyone else guided the deliberations which so happily caused the termination of that terrible strike.

Col. Wright's knowledge of social economics has

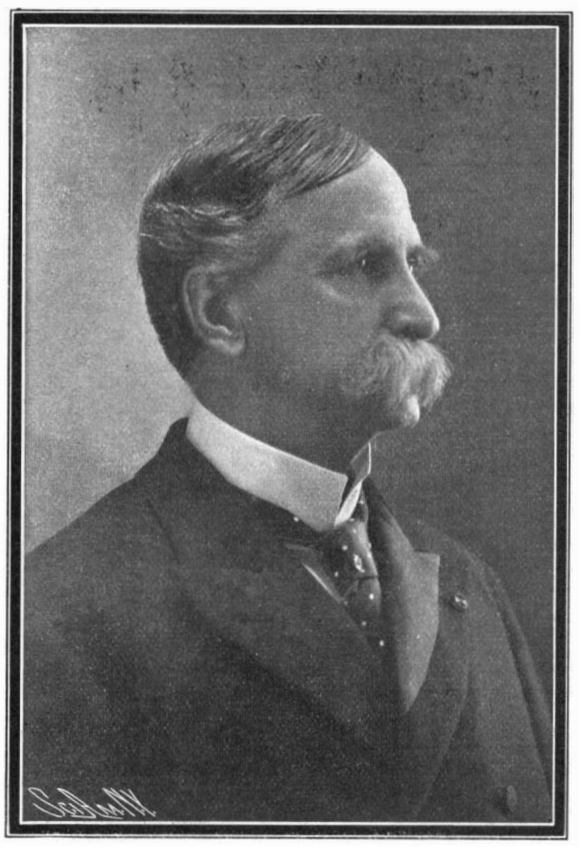

CARROLL DAVIDSON WRIGHT.

been taken advantage of by educational institutions, especially in Washington, for he has served as honorary professor in the Catholic University of America since 1895, and he has also held the chair of statistics and social economics in the school of comparative jurisprudence and diplomacy of Columbian University since its foundation. Harvard, Johns Hopkins, Michigan, Northwestern, Brown, and Dartmouth, have invited him at different times to deliver courses of lectures before their students. In other ways he has also been active, and conspicuous among these is his selection by Mr. Carnegie to serve as a trustee of the richly endowed Carnegie Institution in Washington.

His contributions to science have been large, and include more than fifty annual reports, together with many pamphlets and monographs on social and economic topics. His larger works are "The Factory System of the United States," "Relation of Political Economy to the Labor Question," "History of Wages and Prices in Massachusetts, 1752-1883," "The Industrial Evolution of the United States," and "Outline of Practical Sociology."

Dartmouth has conferred upon him the degree of Ph.D., and Wesleyan, Clark, and Tufts that of LL.D. He is one of the very few corresponding members of the Institute of France in this country, an honorary member of the Imperial Academy of Science of Russia, a member of the International Statistical Institute and of the International Institute of Sociology, and an honorary member of the Royal Statistical Society of Great Britain. At home he succeeded Gen. Francis A. Walker as president of the American Statistical Society, and he is a leading member of the American Social Science Association, a councilor of the American Economic Association, and a member of the American Academy of Political and Social Science.

He joined the American Association for the Advancement of Science at its second Washington meeting in 1891, and in 1894 was made a fellow. Col. Wright continued to take an active interest in the section on Social and Economic Science, of which he became chairman in 1902, as well as vice-president of the association. He presented at the Washington meeting a retiring address on "The Psychology of the Labor Question," and he will preside at the meeting to be held this week in St. Louis.

In the years to come it is his hope that he may be permitted to live in Worcester, Mass., a well-known educational center, and there, as president of the university to which he has been called, pass the remaining years of his life in giving from the rich stores of his accumulated knowledge and experience to those who shall have the honor of listening to the wisdom from his lips. Fortunate, indeed, will be those who shall have that privilege.

PREVENTING FROST ON SHOW WINDOWS IN WINTER.

During winter weather many shopkeepers experience more or less difficulty in keeping their show windows free from the ice that in low temperature tends to defeat the object of the display. No doubt all of the devices for keeping glass clear of ice, published from time to time in the journals, have received a fair test, with varying satisfaction. A writer in one of the foreign drug journals, apparently a druggist who has experienced the rigors of high latitudes, insists that none of the ordinary schemes are of much use, and that the only certain remedy for the opaque deposit of solid water is a double layer of glass with a sufficient air-space between. He states that applications of glycerine, alcohol, and other solutions are of no avail in extreme weather and that, in any case, they must be so frequently renewed that they become extremely troublesome. In the northern portions of Russia, where zero weather is sufficiently common, experience has taught the owners of show windows that the only effective protection is a three-inch air space between two panes of glass. The outer sash is rendered as nearly tight as possible by calking the chinks and pasting strips of paper over the crevices. The glass is then carefully cleaned and dried on a clear, mild day, and a second sash, fitted with the same care to prevent all circulation of air, is inserted about 3 inches within the first. The double panes are said to obstruct the view very little. The physical cause of the deposit of moisture and ice upon windows is the difference in temperature between the surface of the glass and the air bearing a relatively high proportion of moisture, which comes in contact with it. As long as the glass is as warm as the circulating air, there will be no deposit, nor when its temperature is higher than the dew-point of the moist air. Warm air is able to carry a much larger proportion of water than cold air, and the problem therefore resolves itself into a question of keeping the glass warm or the air dry.

A small electric fan in the window two or three feet away seems to answer this purpose well. Probably the moisture is all dried off, hence leaving nothing to freeze; anyway, the glass is perfectly dry and clear.

DISPERSION OF FOGS BY ELECTRICITY.

Sir Oliver Lodge has tried at Liverpool to disperse fogs, using for this purpose a Wimshurst influence machine which discharged by means of a bundle of points into the air. A very high potential is necessary, and to increase the surface a large gas flame was used to supplement the points. On one occasion the discharge of electricity from the flame was sufficient to keep a clear space of fifty or sixty yards radius in a dense fog. Although these experiments were promising, the Wimhurst machine did not seem suitable for everyday use, and there was no other generator which would give a sufficiently high direct voltage to do the work. To overcome this difficulty, Sir Oliver now uses the rectifying properties of the Cooper Hewitt mercury vapor lamp . . . This arrangement gave him unidirectional sparks two or three inches long, and was very effective in laboratory experiments. To dispel the fog in a circle of fifty or sixty yards' radius is a noteworthy performance, but the general application of this method seems to be rather far off. The cleared area will have to be extended much more than sixty yards from the discharge station before the system can be of use in harbors or at sea, thus necessitating the use of very high voltages, such as are at present impracticable. There are, however, waterways—such as the Manchester Canal or the Chicago River, in which the channel is narrow and the traffic very great—where a system of dispelling fogs only slightly better than this would be very useful. It is to be hoped that Sir Oliver will carry on his work and will be able to report much more successful experiments before long.

© 1904 SCIENTIFIC AMERICAN, INC.

AN INGENIOUS MACHINE WHICH GREATLY SIMPLIFIES THE PROCESS OF PRINTING.

The discovery a few years ago that aluminium was a good substitute for lithographic stone furnished a great impetus to the art of lithography. The flexibility of the metal plate permitted it to be used on rotary presses, whereas the stone could only be used on the flat press. Not only pictures, but reading matter was impressed on the plates, so that books and newspapers were printed by the lithographic process. Briefly described, the process consists of printing the matter with greasy ink on a prepared sheet. This is then pressed down on the aluminium plates, transferring the design thereon. A solution of acidulated gum arabic is flowed over the aluminium plate, and is absorbed by the bare portions while the acid combines with the grease of the design to produce a fatty aluminium salt which has a great attraction for ink. In the press the plate is first moistened, by means of a roller, with water which adheres to the gum surface, but is repelled by the greasy design, while the ink roller which follows inks only the greasy design, because the moistened portions repel the ink. The impressions taken from the plate correspond perfectly to the original design.

A few years ago it occurred to Mr. Walter S. Timmis, a Brooklyn inventor, that the process could be much simplified by providing a small mechanism, something like a typewriter, to print the original transfer sheet, and such a machine he set about to design. At the very outset of the undertaking he was

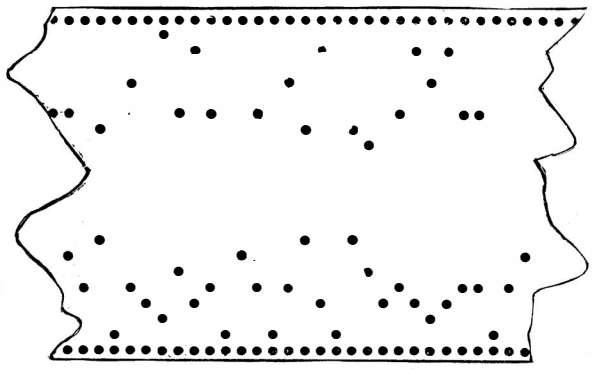

THE PERFORATED TAPE.

met with the problem which has baffled many another inventor in the typesetting field, namely, that of justification, or spacing the words to exactly fill out the line. But Mr. Timmis bravely attacked the difficulty and succeeded in overcoming it by means of a wonderfully ingenious mechanism. With the justification problem solved, the remainder of the task was comparatively easy, and the result of these labors is shown in the accompanying illustrations.

The "Lithotype," as the invention is called, comprises two separate machines, one which perforates a strip of paper, and the other which prints the transfer sheet under control of the perforated tape. The first machine is provided with a keyboard of a hundred keys. On depressing a key two electrical contacts are made which close the circuits of two of the electromagnets in the perforator mechanism shown at the right. The two magnets thus actuated attract their respective armatures which operate corresponding punches to perforate the paper. The perforator mechanism comprises twenty electromagnets which may be operated in a hundred different combinations to correspond with the keys of the keyboard. After each combination is perforated the paper strip is moved forward a unit's distance, presenting a fresh surface to the next combination. The justification mechanism is shown, in our illustration, between the perforator and keyboard. Normally this is set to allow for a nine-units space between each word—a space equivalent to one and a half ems and obviously much greater than would ordinarily be required. In other words, a certain portion of the length of the line is reserved for spacing. This reserved portion varies, of course, with the number of words in the line, being equal to nine units times the number of spaces required. As the perforation of the strip continues, in time a point will be reached where the aggregate length of the words in the line exceeds this variable spacing reserve, and thereupon the selector arm begins to move. The selector arm, which may be seen in the illustration, moves over two series of contacts, one representing units of space, and the other tenths of units. When the reserve begins to be encroached upon, a calculating device determines the width of each encroaching character struck and deducts this from the normal reserve. At the same time the selector arm is automatically swung about until it lies over the contact representing the quotient of the remaining reserve divided by the number of spaces required in the line. As soon as the selector arm begins to move, the operator adds to his line sufficient characters to complete his syllable or word, and then touches the line key, which produces a line-closing perforation in the paper strip. As the last character in the line is struck, the selector arm is moved over the contacts representing the amount of space which must be used between each word to completely fill out the line, and when the line key is struck a switch is closed connecting the justifier contacts with the electric circuit and the selector arm is pressed against these contacts, which cause a corresponding combination of perforations to be punched in the paper strip.

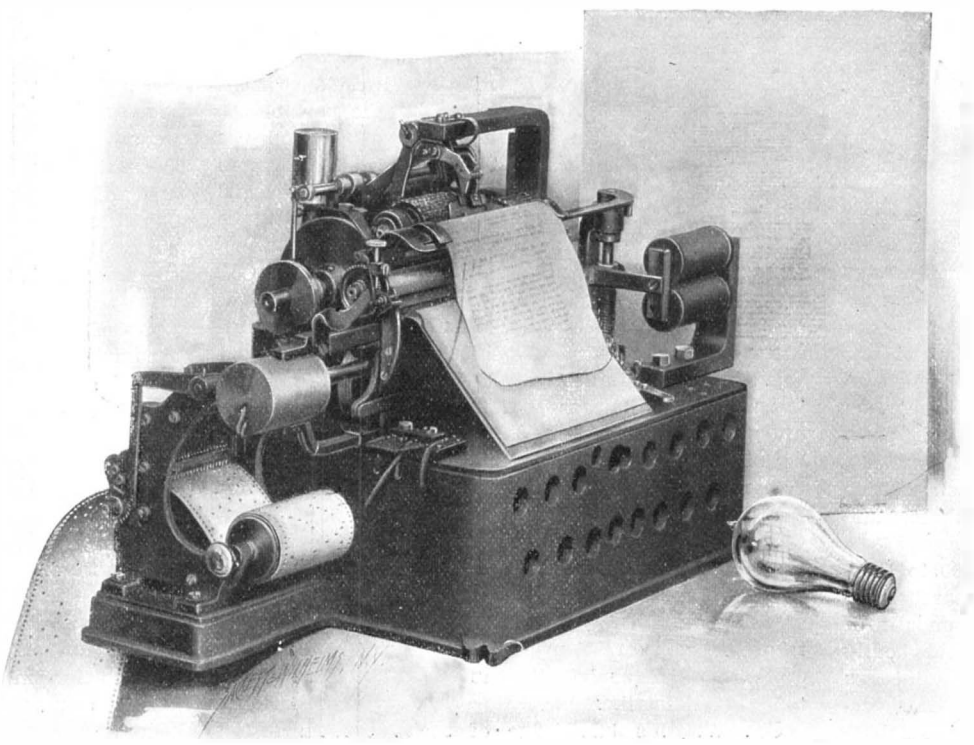

MACHINE WHICH PRINTS THE CHARACTERS ON THE TRANSFER PAPER.

After the desired matter has been recorded upon the tape, the latter is passed through the second machine. In this machine two series of contact fingers bear against opposite faces of tape, and the fingers make contact with each other through the perforations as the tape travels between them. The tape is passed backward through this machine; that is, the end of the line is first to pass between the contact fingers. Consequently, the first contact made is that of the justifier.

In a new machine which is being perfected, the tape passes directly from the perforator through the type-printer without being passed backward. Patents on this machine, however, are still pending, and we are not at liberty to describe the mechanism at this time.

The process of printing from a flat surface is vastly interesting, but probably familiar to not more than one person in a thousand. It is done on the simple principle that oil or grease and water won't mix. The design to be printed from lithographic stone or aluminum plate is defined in ink the basis of which is grease. Over the rest of the plate a roll, moist with water is passed, and when the surface of the plate comes in contact with the paper nothing prints except that portion previously marked out in grease. The process, hitherto confined exclusively to lithograph work, may now by the use of the aluminum plate be made available for use on fast web-perfecting presses such as are used now by modern newspapers.

A FACSIMILE OF PRINTING DONE BY THE MACHINE.

The justifier contacts close the electric circuit to the justifying mechanism, setting the latter to give the proper spaces in the line. The characters are printed on a transfer sheet of paper, by means of a type sleeve, which is given two movements, one a rotary movement, and the other a horizontal axial movement. When a character contact is made, the type sleeve starting from normal is operated by two springs, one tending to move the sleeve through a semi-rotation,

(Continued on page 118.)

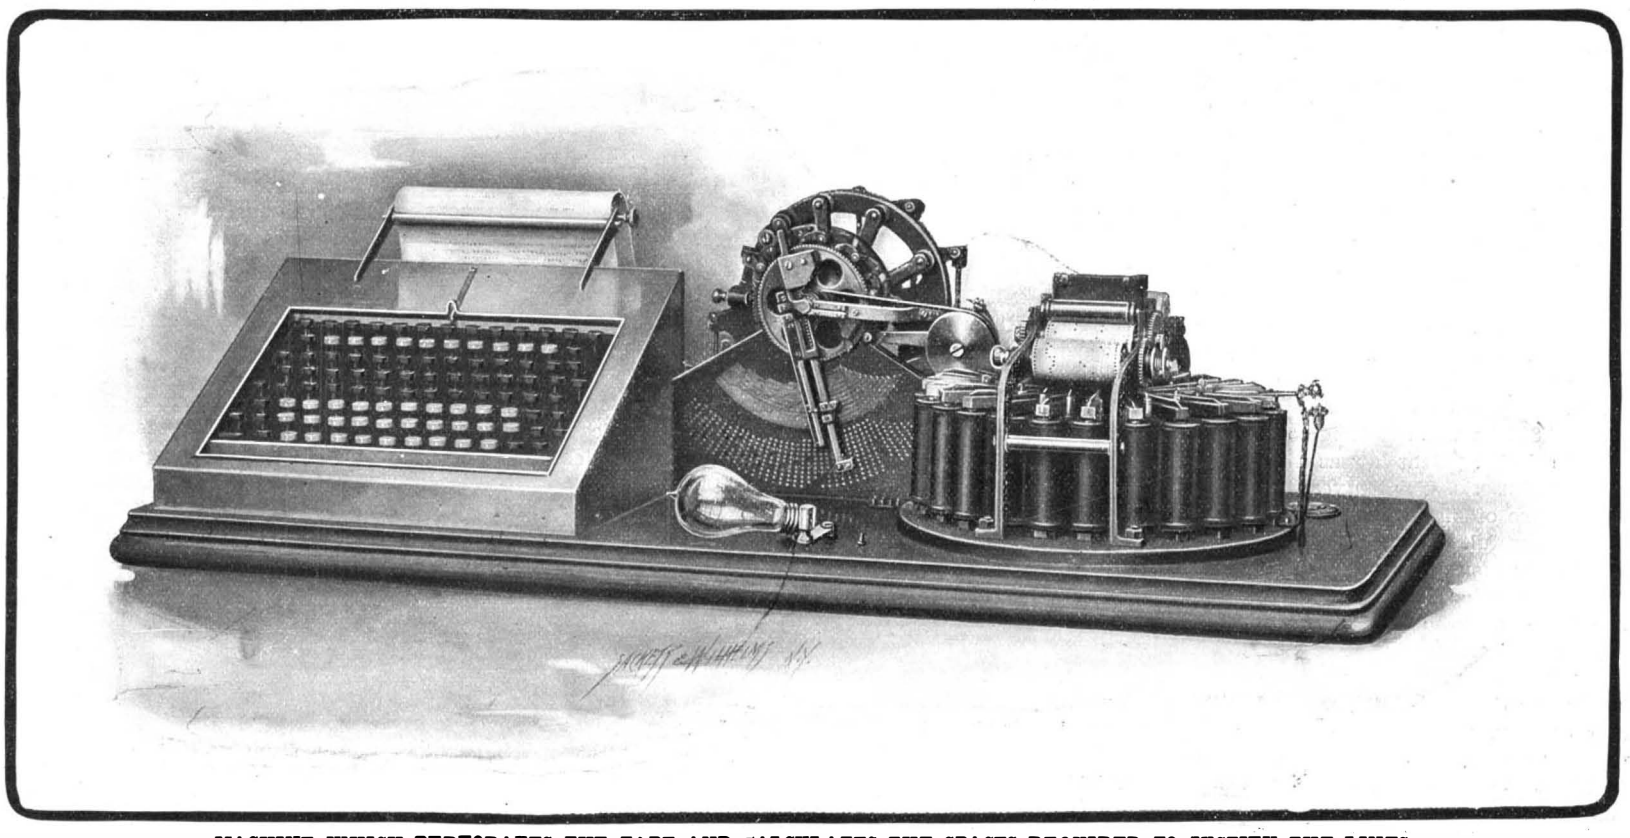

MACHINE WHICH PERFORATES THE TAPE AND CALCULATES THE SPACES REQUIRED TO JUSTIFY THE LINES.

© 1904 SCIENTIFIC AMERICAN, INC.

PULLMAN CARS IN RAILROAD ACCIDENTS.

It is during the Christmas season, and for a few weeks before and after, that experience has taught us to look for a great increase in the number of railroad accidents. We thought that last year was a painful record; but it has been exceeded by the list of horrifying disasters that have marked the past two months. We present illustrations of a wreck that occurred recently on the Frisco system at Godfrey, a small station near Fort Scott, Kansas. The collision took place early in the morning of December 21, 1903. It seems that the brakeman on a freight train which was standing on a siding at Godfrey had been sent out to flag the "Meteor," a fast passenger train, which was due at the time. The express thundered up to the little station at a speed of about 60 miles an hour, and seeing all clear, the engineer carried his train through with the throttle well open. The brakeman either failed to do his duty, or his signal was not seen, and the express crashed into the freight, with the result that twelve persons were killed and a larger number were seriously injured. The wreck of the train was almost complete. The engine was stripped of everything that could be torn away, cab, fittings, smokestack, etc. The tender was completely wrecked, as were the mail car, the baggage car, and the smoker. It is significant, as will be noticed from one of our engravings, that although the first-class coaches and the baggage and smoker were so badly wrecked, the Pullman showed its usual resisting qualities, to which we referred a few weeks ago in this journal. It will be seen that the particular car shown in our illustration has all of its windows intact but one, which is slightly broken.

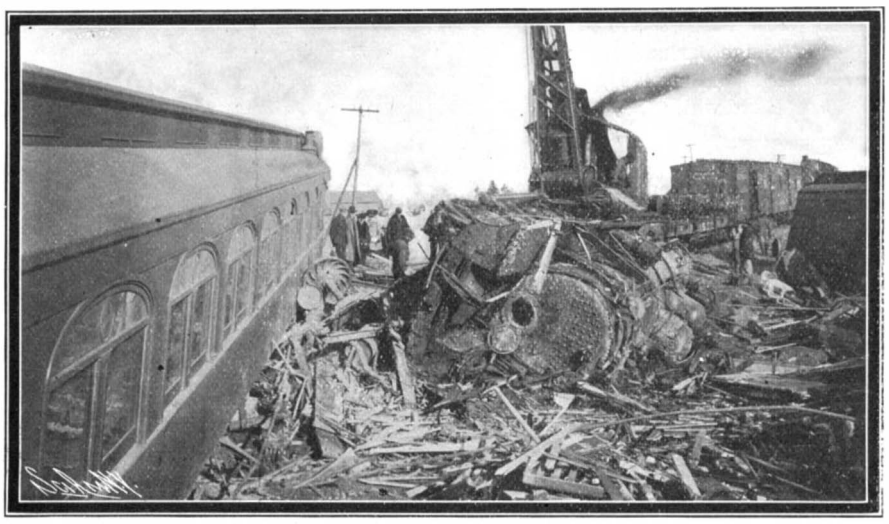

The Wrecked Engine and One of the Pullmans of the Express; the Latter is Practically Uninjured.

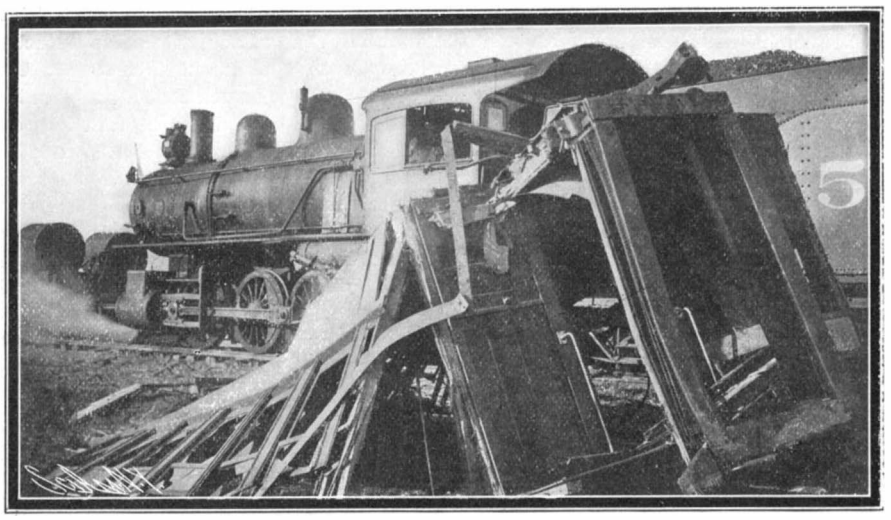

Vestibule and Portion of Side of Day Coach.

RESULT OF A COLLISION AT SIXTY MILES AN HOUR.

A correspondent, Mr. D. N. Byerlee, of Hood River, Oregon, has this to say on the subject of the safety of Pullman cars: "If you will but consider that the mail, baggage, and day coaches act as a sort of cushion between the Pullmans and the engine, you will realize the saving to the Pullmans and the greater than ordinary damage that will result to the day coaches and their passengers. This is really the fact. Keep the Pullman cars off the trains and the loss of life will be reduced to a minimum. But if, as your note would indicate, you would build the entire train as the Pullmans are, you will not have overcome the difficulty. With no light cars to crush and deaden the impact the shock would be so great, coming to a dead stop from a speed of say 60 miles an hour, that almost every passenger would be killed. I do not believe the remedy is so much in the strength of the cars as in the manner of operating the road. If all the cars were built like the Pullmans it would equalize the death rate, and perhaps lower it somewhat. But when we have a perfect block system and our government enacts such stringent legislation as holds in Mexico and enforces it as rigidly as they do in Canada, we shall hear of very few casualties indeed. Twenty-one years' experience and observation in railway service confirms me in the belief that 90 per cent of the casualties are due to carelessness and recklessness, and this certainly is criminal." We fully agree with our correspondent that the position of the Pullmans at the rear of the train conduces largely to the immunity of Pullman passengers from death or serious injury; but it by no means follows that were the case reversed, and the Pullmans placed in the middle or at the front end of the train, they would telescope and crumple up with the same fatal effects that occur in first-class day coaches. As a matter of fact, the Pullmans, by their position at the rear of the train, are occasionally called upon to take the full brunt of a rear-end collision. Recently one of the leading engineers on the Rapid Transit subway in New York described to the editor an instance of this very form of accident. He was in a day coach in the middle of a train, at the rear end of which was the private car of a well-known manufacturer of air-brake apparatus, which while stopped by signal outside the Harrisburg station, was run into by a heavy Chicago and New York express. The private car received the full shock of the collision and proved strong enough to transmit it to the train ahead, pushing the cars together and causing the two day coaches ahead of it to telescope, with a result of 50 per cent fatalities or injuries to the occupants of the two cars. No one was killed, or even seriously injured, in the private car. This was a case where the Pullman, after mitigating the shock by the amount of its own inertia, was strong enough to transmit what was left of it to the train ahead without suffering serious injury itself. The point made by our correspondent that, if all cars were built as strongly as the Pullman, the passengers would be killed by the shock of suddenly arrested motion, is, we think, very much open to question. They would be badly bruised, and limbs would be broken perhaps; but there would be none of the grinding, crushing, and tearing of limb from limb that marks the telescoping of two cars.

At the same time our correspondent unquestionably hits the nail upon the head when he attributes the loss of life not so much to the weakness of the cars as to the careless manner in which our roads are operated. As long as trainmen consider that rules relating to the running of trains are elastic and subject to modification at the will of the individual employe, they will continue to slaughter people in the brutal manner that has characterized the past few weeks. In the older countries the railroad cars, compared with our day coaches, are mere eggshells in strength, and yet we know that during the last year of operation on the roads of one European country, not a single passenger was killed. Judging, however, from the slow progress that we are making, it will be many years before our trainmen have learned to render our block system effective by implicitly obeying them; and until that time has come, we certainly think that it would be advisable to build our cars so that not even combined stupidity, carelessness, and willful neglect of signals can wreck them.

THE NEW STAGE OF THE METROPOLITAN OPERA HOUSE.

"Bayreuth," "Parsifal"—what splendid names to conjure with! Now, thanks to the new stage of the Metropolitan Opera House, we have our own Bayreuth

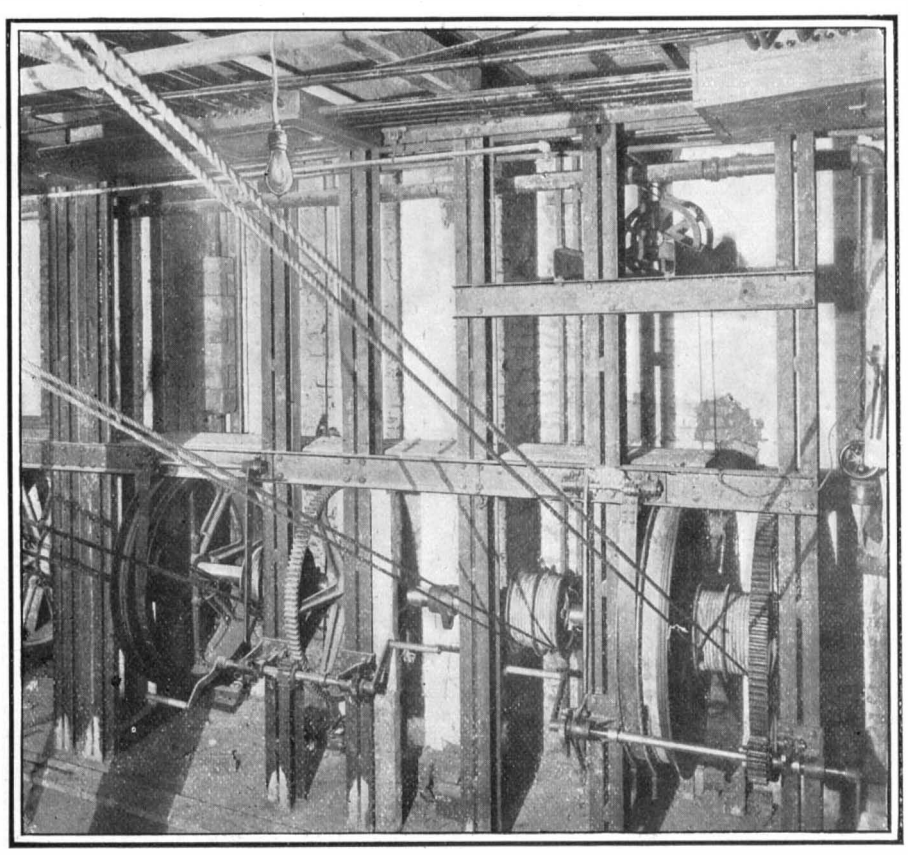

Copyright 1904 by Munn & Co.

Winches for Raising and Lowering the Bridges.

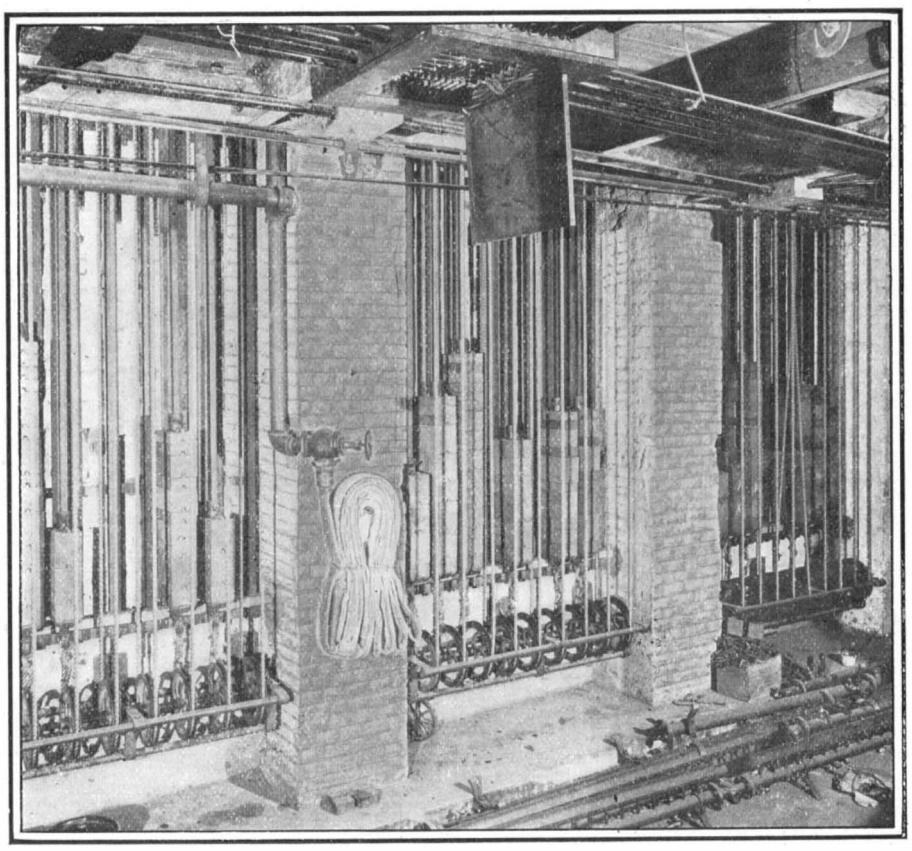

Copyright 1904 by Munn & Co.

Counterweights for the Drop Scenes and Borders.

THE NEW STAGE OF THE METROPOLITAN OPERA HOUSE.

© 1904 SCIENTIFIC AMERICAN, INC.

in New York, where we can give the "solemn festival play."

There is absolutely no reason why "Parsifal" should not be produced in New York rather than in a small, uncomfortable, and highly expensive Franconian town. The Wagnerian idea is to carry the book, the music, the scenery, as a concrete proposition. He wrote the words and the music, designed the whole stage setting, and was his own conductor and stage manager, so we have a case of undivided responsibility. The musical world trembled when it was suggested that "Parsifal," the Holy of Holies, was to be performed in New York; but it has been done, and in the opinion of some critics as well done as at Bayreuth, or even better.

"Parsifal," more than any other of Wagner's operas, depends upon the appeal to the mind through the eye.

The *mise en scène* of this imposing pageant requires great resourcefulness on the part of the stage director. When it was decided to give "Parsifal," a new stage became imperative, and the services of Technical Director Carl Lautenschläger, of Munich, were secured, and in conjunction with Mr. Theo. G. Stein, the architect, a modern stage was installed, capable of making quick changes and transformations. It was their aim to build a stage which would also minimize the amount of labor and render hitches and accidents almost impossible, and that they succeeded admirably is shown by the enthusiasm which the scenic and mechanical effects provoked. The first visit to a stage is always a revelation; the vast size of the room, the rising and dropping scenery, the under-stage mechanism, the lights and the orderly confusion, all tend to cast a rosy light on the theatrical life.

A few generalities are in order. The audience really sees a very small portion of the stage, for behind the curtain is a rectangular structure much higher than the roof of the auditorium. This great height is rendered necessary in order to raise the hanging scenes bodily, without resorting to the necessity of rolling them up. Everything above the arch of the proscenium is termed the "flies." The stage proper is the rectangular platform on which the players or singers stand. The sides of the stage are termed the "wings," and here the singers and ballet enter through the various so-called "entrances," the number depending on the number of "wings." The stage is divided widthwise into sections, and these sections of the stage floor can be raised above or lowered below the stage, depending on their construction, so that whole scenes can be raised or lowered as the case may be, or mountains or other high places built up in a short time. Great depth of cellar is necessary in order to permit of whole scenes being lowered. The top of the stage is known as the "gridiron" or "rigging-loft;" it consists of a slotted floor adapted to carry sheaves for the ropes which serve to support the drop scenes, borders, and gas battens which formerly carried the gas lights and now serve to carry the electric lights. To insure uniform motion and to distribute the weight, there are five ropes to each scene or border, and they pass over pulleys ranged at equal intervals across the width of the gridiron. There are 63 sets of ropes in the new Metropolitan Opera House stage, and the weights to be borne are all counterweighted so that the cloths can all be worked from the first fly gallery as easily as a dumbwaiter. The counterweights are inclosed to prevent accidents. Twenty-eight flymen now do the work of sixty.

In "Parsifal" it is necessary to have two elaborate transformation scenes, and this is accomplished by means of panoramas, four in number, situated in the wings and secured at the upper end to the first fly gallery. The panoramas are huge spools 36 feet long, and the painted canvas is reeled from one spool on one side of the stage to the other. The panoramas are suspended from a trolley serving to carry the weight of the canvas in its width-wise passage along a wire. With the aid of the panoramas, it is possible to produce the remarkable change from the woodland scene to the stately Hall of the Grail Knights, while Gurnemanz and Parsifal appear to be walking the entire distance. The movements of the various panoramas are accurately timed and the effect is good.

We now come to the under machinery, which is elaborate, but still very simple. We have already referred to the "bridges" or movable sections of the stage. At the Metropolitan, the first four are adapted to sink, carrying the scenery, properties, etc., with them; they can also be used to raise whole scenes, saving interminable waits. When a bridge is to be used to raise scenery which rests on its deck or floor, the floor of the stage must be removed. Instead of being taken up in sections like trap doors, ropes are attached underneath that portion of the floor of the stage which is superimposed over the bridge. These ropes pass over pulleys and then to winches. The flooring corresponding to the length of the bridge is taken out in two sections, one right, one left. This is accomplished by means of two pieces of the flooring which are depressed slightly at one end, allowing the two sections of flooring to store themselves in grooves underneath the fixed floor of the wings. The bridge is now raised by two men operating a winch. The bridges are heavily counterweighted so that the labor is comparatively light. The bridges are 42 feet 9½ inches long, 3 feet 8 inches and 2 feet 8 inches wide. Their depth is 21 feet. In the magic garden of Klingsor, the entire kiosk and scenery is let down into the cellar by the bridges, producing an awful scene of destruction. It is prefaced by a short scene which shows us the magician's tower, and we have selected this scene for the drop scene shown. The back drop and borders are raised, while the "practicable" (to use stage parlance) staircase is lowered. The construction of the bridges is such that a trap can be inserted anywhere while they are down, a great improvement over the old fixed traps where you know in advance exactly where Mephistopheles will go down or Hamlet's father's ghost come up. Special movable traps run in the spaces between the bridges and can be located at any point.

The side-scenes, or wings, are also worked mechanically. They are secured to movable trolleys or chariots which run on the floor of the first story of the cellar. This enables the stage to be kept clear and also facilitates the rapid and accurate setting of scenes. The three bridges at the back are counter-weighted and are adapted to rise up 23 feet above the stage to imitate rocks, etc. They can also be run up in sections and fulfill a very useful purpose. While it may appear that all these devices are very simple, yet they are interesting for the reason that everything, even to the panoramas, is worked manually. Herr Lautenschläger has built some very complicated stages, including six revolving stages. He is inclined to think that a stage like the present, or a revolving stage, is best adapted to the needs of grand opera. A revolving stage is to be built at an early date in New York city.

AN INGENIOUS MACHINE WHICH GREATLY SIMPLIFIES THE PROCESS OF PRINTING.

(Continued from page 116.)

and the other to draw it axially from the right to the extreme left. A series of ten pins are arranged at the left end of the type roll, and a similar series is arranged at the right end, the former serving, when raised, to limit the axial movement and the other cooperating with pins on the axis to limit the rotary movement. As stated above, each character is represented by two perforations on the tape; one of these makes contact with a corresponding pin at the right, and the other with a corresponding pin at the left. Now, if, for example, the eighth pin at the right were raised, and the third at the left, the sleeve would rotate three character spaces and slide axially eight character spaces, bringing the predetermined character on the sleeve in line with the printing hammer of the machine. The latter is thereupon actuated to strike the paper against the sleeve and make the required impression. This done, the type sleeve is restored to normal position by two cams and is ready for the next operation. At the same time the carriage which carries the transfer paper is moved laterally a distance corresponding with the width of the character just impressed. As soon as a word is completed, a space perforation is encountered on the tape which causes the carriage to move the distance predetermined by the justifier. And herein lies another very ingenious little mechanism. The carriage moves only in even multiples of a unit; whereas the justifying mechanism is measured in tenths of units. For example, a space of 3.4 units might be required between each word. In this case the first space would measure three units, and an accumulator device would retain the fraction of unit space. The next space would again be three units and .8 would be retained in the accumulator. The third space, however, would measure four units and .2 would be retained in the accumulator. Thus, the operation would continue, the accumulator retaining the fractions of space until they accumulated to an entire unit, when that unit would be applied to move the carriage an extra unit of space. At the end of the line the accumulator is restored to normal, the carriage is returned by the line trip and moved up one space for the next line, and the spacing mechanism is reset for the new line by the new justifier combination of perforations. These operations, though seemingly slow, are nevertheless very rapid. The machine illustrated has been operated at 10,000 ems an hour, or twice the speed at which the average operator manipulates a keyboard. Thus, the transfer machine can handle the output of two perforator machines. Mistakes of the operator can be corrected by pasting strips of paper with the corrections thereon over the faulty matter on the transfer paper.

The general advantages offered by the lithotyping process may be briefly summed up as follows: It does away with the use of type and the process of stereotyping. It makes use of light aluminium plates as against heavy stereotype metal on the presses. The life of the plate is unlimited, whereas the stereotypes must be changed at every 40,000 impressions. In the Lithotype, fonts may be changed simply by slipping on a new type wheel on the printer. A number of small rolls of tape will contain the perforations for a whole book and may be very conveniently stored or mailed. The machine is very compact and takes up little room. We show an ordinary sixteen candle power incandescent globe in each of the illustrations to indicate the size of the machine.

The Commerce of the United States and Russia.

Exports from the United States to Russia in the year just ended aggregated practically 20 million dollars. This is more than double the amount of our exports to Russia in 1901, the year in which duties were advanced upon merchandise from the United States entering Russia, and is also double the average for many years preceding that date. Imports from Russia have also greatly increased since that time. In 1903 they were $10,907,315, against $7,263,874 in 1901. Thus the total commerce between the United States and Russia in the calendar year 1903 exceeds 30 million dollars, and is double that of 1901, the year in which such alarm was felt with reference to our commerce with Russia, and is three times as great as in 1893.

This increase in the trade with Russia is especially marked when compared with the growth in trade with other European countries. Comparing conditions in 1903 with those of 1901, it may be said that exports to Europe as a whole show a slight decrease, while those to Russia, as already indicated, show an increase of more than 100 per cent. To the United Kingdom our exports in 1903 are 55 million dollars below those of 1901; to Netherlands, the reduction in exports, as compared with 1901, is more than 12 millions, and to Belgium, more than 5 millions. To France our exports in 1903 show a slight increase, and to Germany an increase of nearly 40 million dollars; but in each case the percentage of gain is small, compared with that in our exports to Russia, which show a much larger gain proportionately than those to any other European country, while in our imports from Russia a material increase is also shown.

The chief growth in our exports to Russia, in the two years in question, has been in cotton, agricultural implements, copper and its manufactures, and naval stores. In iron and steel there has been a slight reduction, and in flour a considerable reduction. Raw cotton, of which our exportations to Russia in the fiscal year 1901 were less than 2½ million dollars, showed in the fiscal year 1903 a total export to that country of over 8 millions. Agricultural implements have grown from $1,692,597 to $3,636,145; copper and manufactures thereof, from $790,724 to $1,364,272, and naval stores, from $281,616 to $432,792. Iron and steel, which in the fiscal year 1901 amounted to $1,636,894, was in the fiscal year 1903 $1,198,139; and flour, which in the fiscal year 1901 was $1,261,122, was in 1903, $1,028,590.

The Arrival of Smithson's Body.

The coffin containing the body of James Smithson, the founder of the Smithsonian Institution, who died many years ago in Genoa, was removed from the dispatch boat "Dolphin" on January 25 and carried to the Smithsonian Institution, where it will remain until Congress authorizes its final burial in the grounds of the Institution.

The party that witnessed the transfer included Acting Secretary Loomis, as the personal representative of President Roosevelt; Sir Henry Mortimer Durand, the British Ambassador; Senators Cockrell, Frye, and O. H. Platt; Representatives Hitt, Adams, and Dinsmore; J. B. Angell, of Michigan; J. B. Henderson, of this city; Prof. S. P. Langley, secretary of the Smithsonian Institution, and Dr. Alexander Graham Bell. The coffin was draped in the American and British flags. As it was lowered from the "Dolphin" to the caisson, the United States Marine Band played "Nearer, My God, to Thee." Troop F, 15th Cavalry, served as escort. At the Institution the body was formally received, and the Rev. Dr. R. H. McKim, of Washington, delivered a eulogy of Smithson.

Wireless Telegraphy in Germany.

Wireless telegraphy is rapidly coming into commercial utility in Germany, and large numbers of "spark messages," as such telegrams are called, are transmitted daily. There is a service in operation between Denmark and Prussia, while two German steamers running between Kiel and Korsoer are equipped with instruments and maintain continuous communication with both the German and Danish land stations. The system employed is the Slaby-Arco. Private messages are accepted at the two offices at Bülk near Kiel, and the other on the Isle of Fehmarn. A fee of 17 cents is charged for every message transmitted from one station to the other, irrespective of the number of words it contains, and it is thence dispatched to any part of Germany or Denmark at a cent per word.

© 1904 SCIENTIFIC AMERICAN, INC.

Correspondence.

Mammoth Tooth.

To the Editor of the SCIENTIFIC AMERICAN:

I notice in your issue for January 23 a description of a mammoth's tooth. I have recently received the tooth of a mammoth which was discovered at Austin, Texas, while a well was being dug. It was found 45 feet below the surface. The laborer struck it with his pick-ax, in excavating it, and broke it. The tooth weighs 12 pounds. It is 13 inches long, 7 inches broad at the center, and it is 4 inches thick. It makes an excellent curio. J. S. BROWN.

Galveston, Texas.

About the New Method of Gathering Turpentine.

To the Editor of the SCIENTIFIC AMERICAN:

I note in your issue of January 2 the article relating to the "new method of gathering turpentine," invented by Dr. Charles H. Herby, and by him "given to the public."

Eleven years ago I experimented with detachable receptacles to catch the "dip" in lieu of the ordinary "box" cut in the trees, trying a number of substances and forms of receptacles.

My experiments were made at the McQurre place at Adiel, Ga. The object which I sought was mainly to secure a better grade of rosin after the first year's working of the trees.

A "virgin" tree yields "window-glass," water-white rosin, which brings a high price. The second, third, and fourth year's working of trees yields poorer and poorer grades of rosin, because of the tannic acid, which accumulates in the old boxes in the trees, and the fourth year (the last in Georgia) rosin hardly more than pays for the barrels and handling.

By the use of the detachable boxes, I hoped to secure a high grade of rosin through the working of trees, and also save some "dip," which is lost in the usual way of gathering—dipping from the box in the tree into a large bucket with a wooden paddle.

While the theory seemed good, I found it entirely impracticable to apply it. It is impossible to construct a receptacle which will come anywhere near answering for the different forms and sizes of surfaces to which they must be attached.

The "dip" will run by and to the ground. I even tacked a metal basin to a specially-prepared surface, without entirely preventing the loss of "dip."

The "dip" or gum adheres to the inside and outside of such a receptacle, gets hard, and cannot be removed by any feasible process in the wood.

In short, this plan is impracticable. Moreover, I found that at least one man had made the same kind of experiments some three years before I attempted it.

GEORGE W. COLLIN.

Bridgeport, Conn., January 8, 1904.

New Automobile Records on the Ormond-Daytona Beach.

As a beginning of the promised lowering of automobile speed records at the race meet in Florida last week, William K. Vanderbilt, Jr., lowered Henry Ford's record made on the ice by two-fifths of a second. Mr. Vanderbilt drove his recently imported 90-horsepower Mercedes racer, and he covered the mile in 39 seconds, or at the rate of 92.31 miles an hour. One of the fastest races that was run on the same day, January 27, was a 15-mile match between H. L. Bowden and S. N. Stevens, each of whom drove a 60-horsepower Mercedes car. Bowden beat Stevens by 11 seconds, covering the 15 miles in 10:18, or at an average speed of about 87 miles an hour.

The great feature of the second day was the mile championship race, consisting of three heats. There were seven machines in this race, but one of which—the Winton Bullet No. 2, driven by Barney Oldfield—was of American make. The other six were Vanderbilt's Mercedes, Bowden's Mercedes, Stevens' Mercedes, Brokaw's Renault, Shanley's Decauville, and La Roche's Darracq. The first heat was won by Vanderbilt in 48 4-5 seconds, with Bowden second in 49 3-5, and Shanley third in 55 4-5 seconds.

In the second heat, the Winton 8-cylinder machine forged to the front and made the fast time of 43 seconds (83.72 miles an hour). Mr. Stevens was second in 45 2-5 seconds, and Mr. Brokaw's Renault came in third in 48 3-5 seconds.

The third heat was also won by Oldfield in 46 3-5 seconds, while Mr. Vanderbilt finished second in 49 3-5 seconds. The mile championship for 1904 therefore goes to the American racing car built on distinctly American lines, i. e., with a horizontal motor instead of one of the vertical type.

The first heat of the five-mile invitation race for gentlemen amateurs was won in 5 minutes, 18 3-5 seconds, by Mr. James L. Breeze on his 40-horsepower Mercedes.

The second and final heats were not run off till the following day, when they were won by Mr. Vanderbilt in 4:38 1-5 and 3:34 3-5 respectively. The first heat of the five-mile free-for-all race was won by Oldfield in 3:48 4-5, but his machine broke down just as he finished. The second and third heats went to Mr. Vanderbilt in 3:40 and 3:31 3-5 respectively. The latter time is equal to an average speed of about 85½ miles an hour. Mr. Vanderbilt also won the one-mile race for gentlemen drivers in 47 3-5.

A one-mile motor bicycle race was a feature of the third day's sport, and was won by G. H. Curtis, on a machine of his own make, in 56 1-5 seconds. The concluding race, a five-mile handicap, was won by S. B. Stevens from scratch in 4 minutes and 2-5 of a second.

The races on the fourth and concluding day were over ten-mile and twenty-mile stretches. The times made will be given in our next issue.

THE HEAVENS IN FEBRUARY.

BY HENRY NORRIS RUSSELL, PH.D.

The finest part of the evening sky at this season lies south and west of the zenith, where we find several of the brightest constellations in the heavens.

At our accustomed hour of 9 o'clock in the middle of the month, Gemini is almost overhead, a little south of the zenith. Its two bright stars, Castor and Pollux, about 5 deg. apart, are the principal feature of the constellation, and two roughly parallel lines of fainter stars extend from them toward Orion.

Below Gemini lies Canis Minor, whose principal star, Procyon, sends us more light than Castor and Pollux combined. Still lower is Canis Major, with the magnificent Sirius, six times as bright as Procyon, and surpassing fourfold any other star that we ever see. Below Sirius and to the left is the rest of the constellation, which contains one star almost as bright as Castor, and two or three others not much fainter, though they do not appear nearly as bright to us as Castor does, on account of the great absorption which their light suffers in passing obliquely through our atmosphere.

Canopus, the brightest star in the heavens after Sirius, can be seen low on the horizon, a little to the right of Sirius, by observers south of latitude 35 deg.

To the right of Procyon, and a little below it, appears Orion, the brightest of all the constellations, with two stars of the first magnitude and several of the second. Higher up and farther west is Taurus, with the red Aldebaran, and the cluster of the Pleiades farther west. North of this, and west of the zenith, is Auriga, whose brightest star, Capella, ranks next to Sirius among those now in sight. Following down the Milky Way we come to Perseus, then Cassiopeia, and finally Cepheus, well down below the pole.

Aries lies below Perseus on the left. The southwestern sky is dull, being occupied by Eridanus and Cetus, which have few conspicuous stars.

East of the meridian the most prominent groups are Ursa Major and Leo. The former is coming up on the right of the pole, the latter is quite high up in the east. The long regular line of Hydra rises from the southeastern horizon, and extends almost to Procyon. Parts of Virgo and Boötes have risen, but their brightest stars are still invisible. Draco, below Ursa Major, is the only other prominent constellation in sight.

About 3½ deg. southwest of Capella (in the direction of the Pleiades) lies a star—Epsilon Aurigæ—which recent investigations show to be an uncommonly interesting object. It has been known for many years that the star is variable. It is usually a little below the third magnitude—fully as bright as the brighter of the two stars which lie 3 deg. south of it—but on several occasions it has been seen by competent observers to be of the fourth magnitude—decidedly fainter than either of them.

It has been supposed that these fluctuations in brightness were irregular. However, Dr. Ludendorff, of the Potsdam Observatory, who has recently made a careful discussion of all the available observations, finds that the epochs of minimum brightness have occurred at regular intervals of a little over twenty-seven years—in 1821, 1848, 1875, and 1902.

About a year before the epoch of minimum, the star begins to decrease in brightness, and in seven months it has lost about half its light. Then for about ten months it remains constant, and then increases again, recovering its original brightness in seven months more. During the remaining twenty-five years of the period there is little evidence of any change in the star's brightness.

This variation is exactly similar in character (though of very much longer period) to that of the well-known Algol variables, and it is natural to attribute it to the same cause, namely, the eclipse of one of a pair of binary stars by the other. This hypothesis is strongly confirmed by the fact that spectroscopic observations, also made at Potsdam, show that the star is a binary of long period, both of whose components are bright. The relative orbital velocity of the two stars appears to be at least as great as that of the earth around the sun.

Although not enough data have yet been published to enable the dimensions of the system to be calculated with any reliability, a rough estimate, based on the assumption that the true orbital velocity is a little greater than that of the earth, may be of interest.

It would appear that the system consists of two stars, about equal in brightness, one of which is more than twice the diameter of the other. When the small star is eclipsed behind the large one, all its light is cut off, and we have a minimum. When the small star is in front of the large one, it cuts off only a small fraction of its light, and there is not enough difference in the amount of light which reaches us to be noticeable.

The period of revolution of these two stars is about twenty-seven years, and their distance apart is on the average about equal to that of Neptune from the sun. The smaller star is about 350 million miles in diameter, and the larger one about 850 million miles, or about 400 and 1,000 times the sun's diameter. The combined mass of the two stars is, however, only about thirty-five times that of the sun, so that they must be of an excessively tenuous constitution.

It should be borne in mind that the above numbers can give at best merely an idea of the general nature of the system, and may be very far indeed from numerical correctness. However, this exceedingly interesting system is now under careful observation, and we may hope that in a few years it will be possible to say definitely whether this theory of its variation is correct, and, if so, how large the stars really are.

THE PLANETS.

Mercury is morning star in Sagittarius and Capricornus. On the morning of the 10th he reaches his greatest elongation, and is nearly 26 deg. west of the sun. He is, however, so far south that he will not be very easy to see, although he rises nearly 1½ hours before the sun. By the end of the month he rises only half an hour before sunrise, and can no longer be seen.

Venus is also morning star, in the same constellations as Mercury, but twelve or fifteen degrees west of him, so that she rises about an hour earlier. Though steadily growing fainter, she is still the brightest of the planets.

Mars is evening star in Aquarius and Pisces, and can be seen shortly after dark, as he sets about two hours after the sun. He is more than 200,000,000 miles from us, and is consequently inconspicuous, being only about as bright as the pole star. Jupiter is likewise an evening star. On the night of the 25th he is in conjunction with Mars, being half a degree south of him. The two planets can easily be seen just after dark, a little to the south of west. Saturn is in conjunction with the sun on the 1st, and is practically invisible throughout the month. At midnight on the 25th he is in conjunction with Mercury, at a distance of about three-quarters of a degree. By a singular coincidence, this conjunction takes place on the same day, and at the same hour, as that of Jupiter and Mars. In this case, however, the two planets are so far south, and so near the sun, that they can hardly be seen.

Uranus is morning star in Sagittarius, and rises at about 3 A. M. on the 15th. Neptune is in Gemini, and crosses the meridian at 8:36 P. M. on the same date.

THE MOON.

Full moon occurs at 11 A. M. on the 1st, last quarter at 5 A. M. on the 8th, new moon at 6 A. M. on the 16th, and first quarter at 6 A. M. on the 24th. The moon is nearest us on the 1st, and farthest away on the 15th. She is in conjunction with Uranus on the 11th, Venus on the 12th, Mercury on the 13th, Saturn on the 15th, Mars at 2 P. M. on the 18th, Jupiter at 10 P. M. the same day, and Neptune the 26th. The conjunctions with Jupiter and Mars are decidedly close. As seen from the northern United States, the moon passes north of both planets at a distance less than her own diameter.

Cambridge Observatory, England.

Another Mastodon Found in New York.

Near Hornellsville, N. Y., part of a skeleton of a great mastodon has been dug up. Some laborers were excavating near the village of Belvidere for the Pittsburg, Shawmut, and Northern Railway Company, and when about six feet down, one of the men struck what looked like a large bone. The foreman rescued the bone after it had been broken in two by the pick of a workman. Dr. Johnson, who is said to have been once connected with the Smithsonian Institution, pronounced it to be portions of a mastodon's rib. Further excavation brought to light three ribs and four vertebræ, making in all a section of the animal's back about eighteen inches long. Each of the vertebræ is 6 inches in width. These seem to be by far the largest mastodon bones of their kind ever discovered.

Curie's Refusal of the Medal of the Legion of Honor.

Prof. Curie has declined to accept the medal of the French Legion of Honor, despite the fact that the government offered it to him of its own free will, and not because of the solicitations of any friends of the Curies. The refusal comes all the more as a surprise, since Prof. Curie accepted the Nobel prize not so very long ago.

© 1904 SCIENTIFIC AMERICAN, INC.

MAKING ASBESTOS FIRE CURTAINS AND FIREPROOF FABRICS.

BY A. FREDERICK COLLINS.

With all the inventions and improvements in methods and apparatus for fire-fighting, it would seem that the quenching of accidental fires would be a comparatively easy matter; but experience has shown that after a certain critical burning point has been reached, the best-directed efforts fail. If the extinguishing of fire has not developed into an exact science, the art of building construction has; and it is now possible to make not only buildings absolutely fireproof, but all their interior furnishings as well. A building of steel, brick, and fireclay offers but little protection from fire to the occupants if its interior is furnished in woods, silks, and cottons, and it is these inflammable products that are often placed where ignition is most easily possible. But these materials may be easily substituted by heat-resisting, chemically-prepared fabrics, or what is better, by products of asbestos, a mineral composed of flax-like fibers, which may be woven into cloth, spun into rope, made into paper, or compressed into a form that possesses all the qualities of wood except ignition. The purpose of this paper is to describe some of these processes.

Asbestos is one of the most remarkable substances found in nature, and is classified by geologists as a peculiar species of the hornblende family of minerals. Its composition is chiefly silica, magnesia, alumina, and ferrous oxide, and consequently unconsumable, hence its name. The fibers formed by the chemical combination above given are perfectly smooth, and in this respect are different from all other known fibers.

Paradoxically, it is the link which completes the chain between the vegetable and mineral kingdoms, and is in fact a mineralogical vegetable possessing the curious properties found in both, for it is at once fibrous and crystalline, elastic and brittle, heavy as a rock in its crude state, yet as light as thistledown when treated mechanically.

Added to this, its fibers, soft, white, and delicate, have, by their inherent quality of indestructibility, withstood the action of the elements since the world began; and through all the countless ages, during which the hardest rocks surrounding it have been reduced, this mineralogical mystery has remained intact, having successfully resisted the assaults of fire, acids, and time. Asbestos is found widely distributed throughout the world, although the principal supply of crude asbestos suitable for the manufacture of fireproof cloths and curtains comes from Canada, about seventy-five miles from Quebec.

The Italian mineral has a fine, silk-like fiber, but is

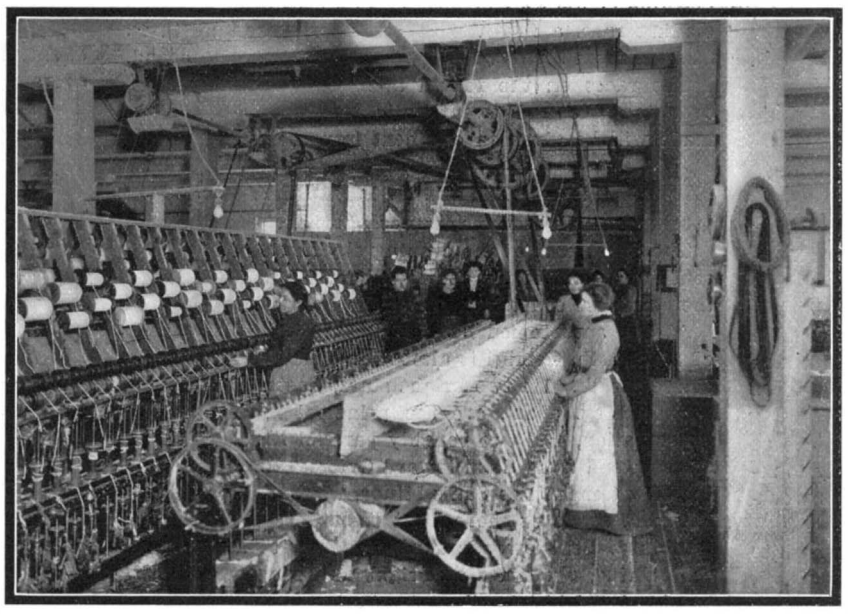

Weaving Asbestos Cloth.

lacking in the essential characteristic of strength. The product obtained from South Carolina has a soft, woody, yellowish fiber, which quickly powders under pressure. The South African asbestos, as one might naturally infer, is of a dark slate or black color, with exceptionally long, strong fibers, but owing to its stiff and horny texture, it cannot be manufactured into a fine fabric, hence the superiority of the Canadian asbestos, and its large consumption in the United States.

The mining of asbestos differs radically from the mining of other minerals, since no shafts are sunk, but excavations are made in the open, somewhat after the manner of a stone quarry. Canadian asbestos, however, is found in narrow veins or seams about an inch and a quarter in thickness, and embedded in rock which is easily severed from it. The strata of asbestos, which may be vertical or horizontal, are found in practically detached deposits, and are as elusive as those of zinc-bearing ore, and can only be determined by exploring for them.

The rock to which the mineral is attached shows on fresh fracture a serpentine mineral of a green shade containing finely-divided particles of chromic and magnetic iron. The asbestos on cleavage presents a brilliant, dark-green surface by reflected light, but the fibers after they are detached are perfectly white. The act of separating the mineral from its matrix of rock is termed "hand cobbing," and after this process the mineral is shipped to various factories in the United States.

The process of manufacture begins by placing the asbestos mineral in a chaser mill, a machine comprising a rotating edge-wheel revolving at the end of a radial arm in a trough, which crushes the mineral, dividing the fibers without destroying them. The result is a snowy mass of mineral wool ready for winnowing, a method of removing the minute particles of rock still clinging to the fibers very much like the winnowing of grain; this is done by means of a blast of air, which separates and blows away the foreign matter, leaving the fibers in a refined state and in proper condition for the third stage of manufacture.

This is termed air fiber raising, and as the name implies, the fibers are raised by a current of air produced by a blower of large dimensions through a vertical pipe inclined at a small angle. The object of this procedure will be obvious, when it is stated that the air blown across the fibers causes those of coarser texture to be deposited in a compartment near the bottom of the pipe. The medium fibers will be projected a little higher, and these will fall into a second compartment. The finer fibers will be blown to a higher point, and there collected, while the dust will be carried to the top and deposited.

The fibers are in this way sorted into different lots according to their texture, and are ready to be made into articles for which they are best adapted. The fluffy stuff now goes to the carding room, just as though it were genuine wool sheared from a sheep or

(Continued on page 122.)

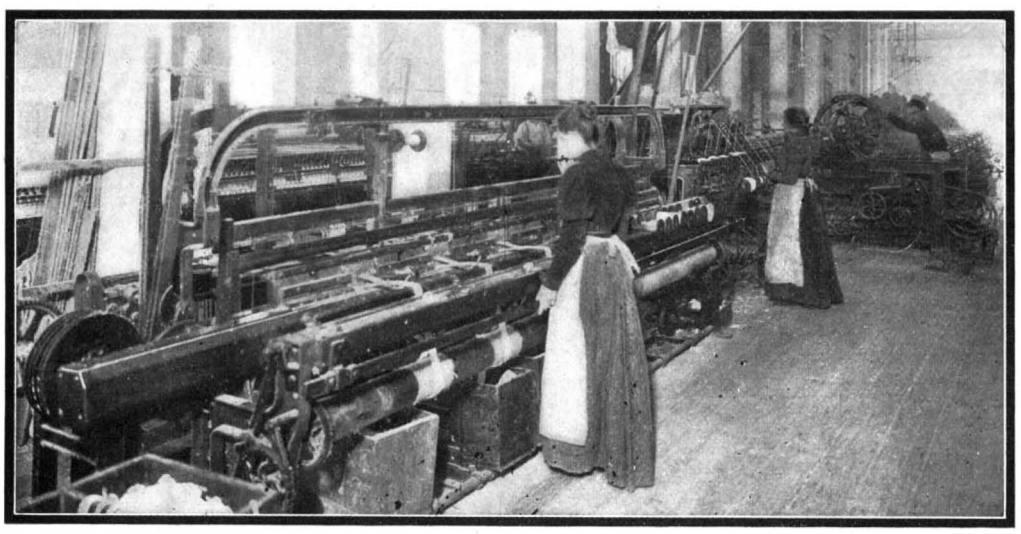

Weaving Asbestos Listing.

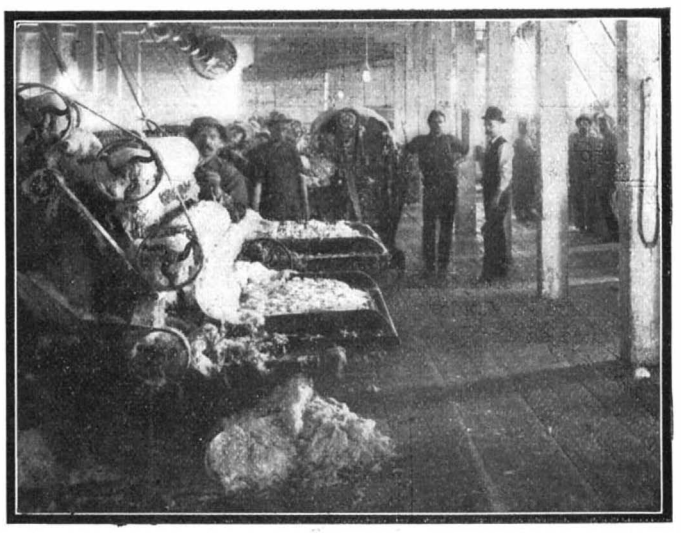

Carding Asbestos Fibers.

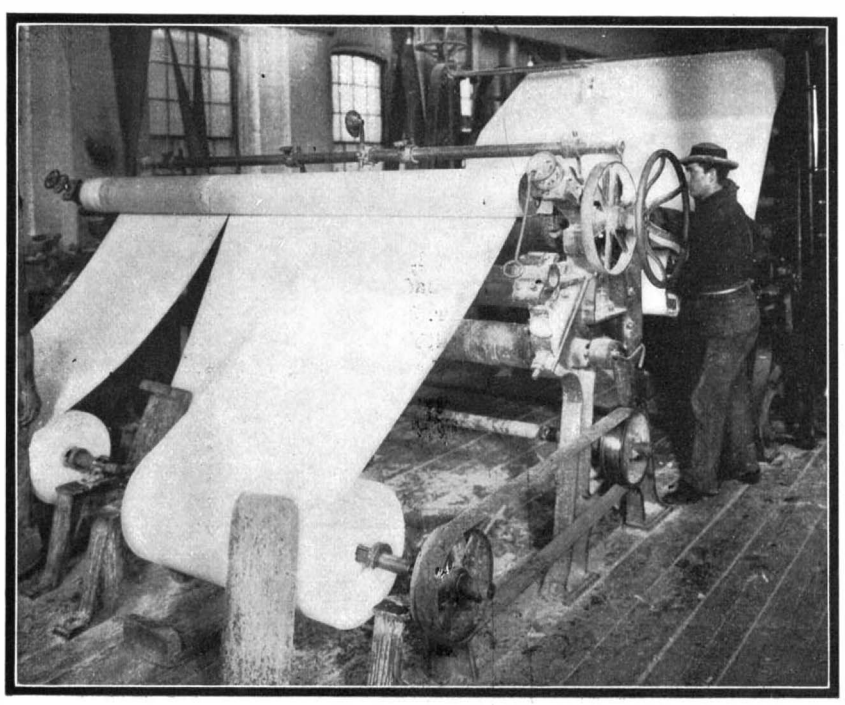

Cutting Asbestos Paper.

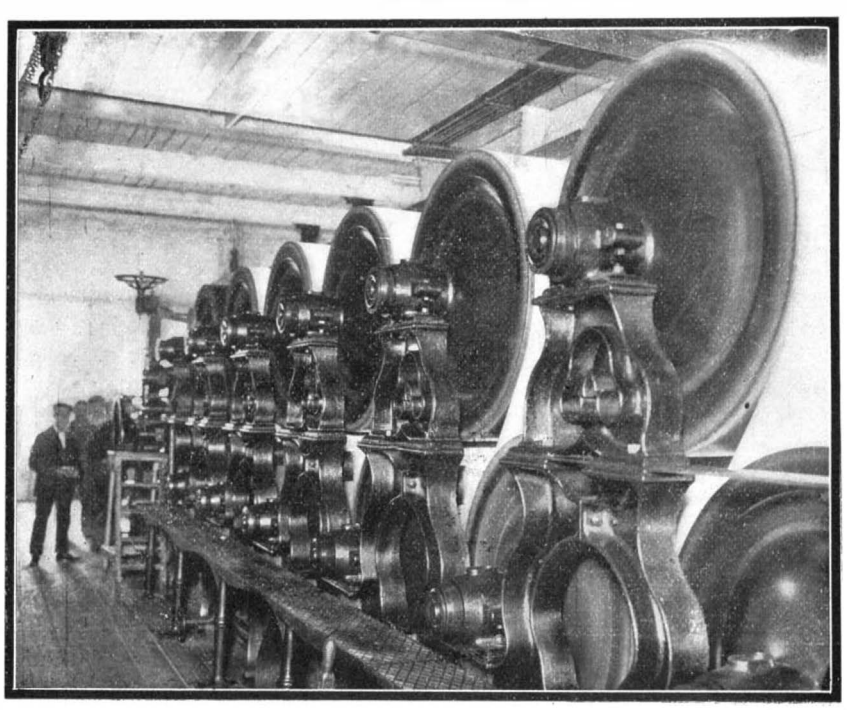

Manufacturing Asbestos Paper.

HOW ASBESTOS CURTAINS ARE MADE.

© 1904 SCIENTIFIC AMERICAN, INC.

THE ABORIGINES OF JAPAN.

BY WALTER L. BEASLEY.

Probably one of the most interesting ethnological exhibits at the forthcoming St. Louis Exposition will be a native village and several family groups of the peoples who still remain a puzzle to the anthropologists. They have no written language, no record of any kind to throw light upon their past. They are classed as the aborigines of Japan, and were found living upon the island when the Japanese arrived there. The Japanese conquered and drove them northward to the cold and less hospitable regions. They now dwell on the island of Yezzo, just north of Japan. A few own the Kuriles, while a portion have emigrated across to the Russian penal settlement of Saghalien. The men are noted for the extraordinary growth of hair, which covers their bodies, as well as for their long beards. Owing to their primitive ways, and peculiar religious and ceremonious observances, they afford an excellent subject for study. An extensive and picturesque collection of Ainu dress and ceremonial objects has recently been received and installed at the American Museum of Natural History, obtained by Dr. Berthole Lauffer, an Asiatic explorer, and partly by gift of Arthur Curtis James, Esq.

Ainu Women With Tattooed Mustaches.

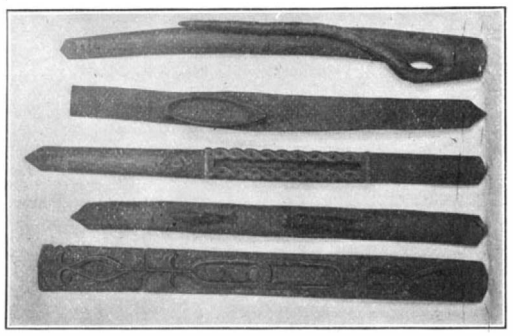

Mustache Lifters.

A Coat Made of Bark.

Hairy Ainus of Yezzo of Japan. Prof. Frederick Starr, of the University of Chicago, leaves shortly for the Orient to secure typical representatives of this mysterious and little-known race, who will be seen in this country for the first time. They are one of the few

The Ainus' dress, religion, and mode of life are almost the same as those existing hundreds of years ago. The people are subjects of Japan, but have no voice in government, and are simply left to themselves. They have no ambition, and have not introduced into their industrial life any of the progressive methods of their near neighbors, the Japanese. They number about 16,000, a mere remnant of a once numerous and barbarous race. They subsist chiefly by hunting and fishing. The bear is still pursued and shot by means of the primitive bow and poisoned arrow, though the Japanese are endeavoring to enforce a law against this method.

An Ainu house consists of a framework of poles having the roof and sides thatched with reeds, with a small hole left in the roof for the smoke to escape. The completion of one of these huts is considered a gala occasion, and marked by a house-warming feast, at which all the relatives and others who helped to build the same are invited. Cakes of millet are passed around, and a big tub of *saké* or rice wine is placed in the center of the room.

One of the odd objects used by Ainu men are long wooden sticks extensively ornamented, called mustache lifters. These serve a double purpose, being used in religious ceremonial worship; when so employed, they dip one end in the *saké* bowl, and offer a few drops of wine to the gods whom they desire to pray to, while in ordinary use they are utilized to keep the long beard out of the cup while the person is drinking. They are from twelve to fourteen inches long, and carved in various designs, and are highly treasured by their owners, who do not care to part with them.

Young women are more prepossessing than the men, and are much sought by the Japanese for wives. They practise, however, the custom of tattooing their lips so as to imitate mustaches, thus producing a strange effect to their features. The tattooing is said to be somewhat painful. It is done by degrees, requiring about a year to put the finishing touches on. The tattoo is obtained from bark of the birch, a pile of which is burnt under a kettle, until the bottom is well blackened by a thick coating. With a knife the woman makes a few incisions on the part to be tattooed, after which she takes some of the soot upon her finger, and rubs it well in the gashes she has made. Several applications result in two dark-blue bands, which will last for five or six months before being renewed.

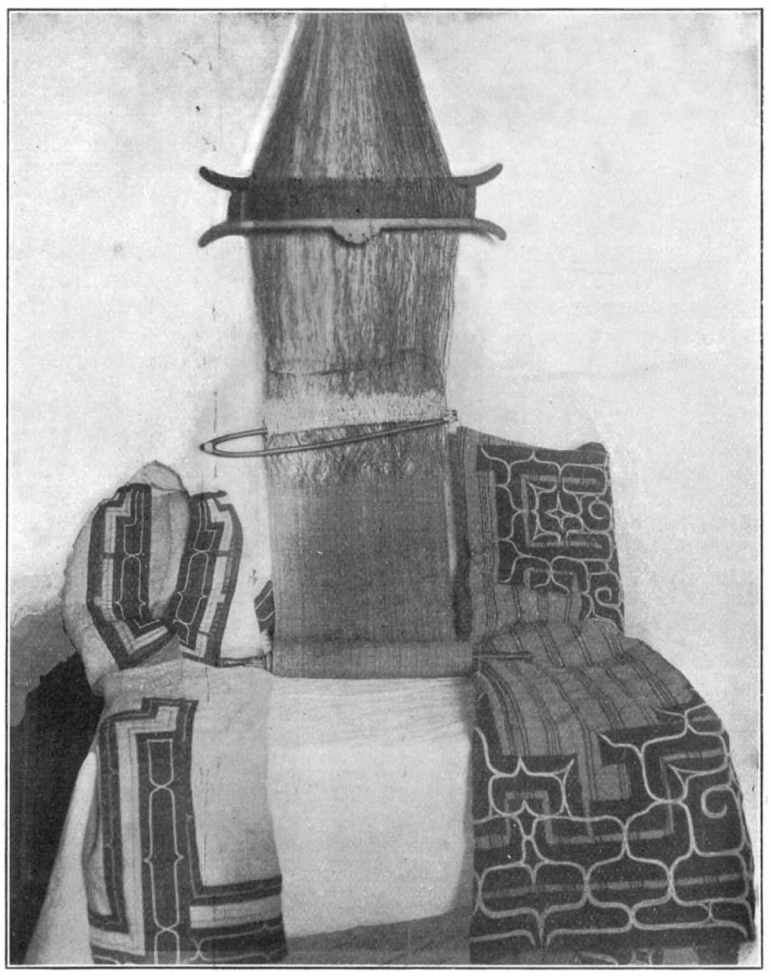

Native Loom, Showing Roll of Bark Cloth and Garments.

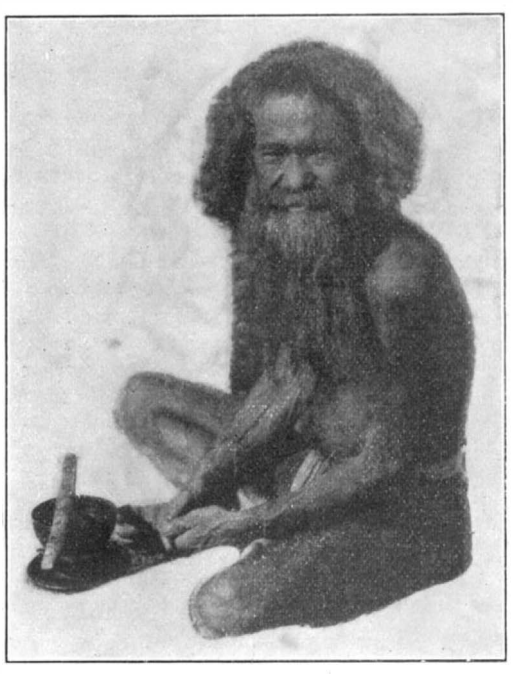

Hairy Ainu of Yezzo, Japan.

One of the most curious and sacred of all the Ainu belongings is the "*inao*," or wooden prayer sticks, which hold the most important place in their religion

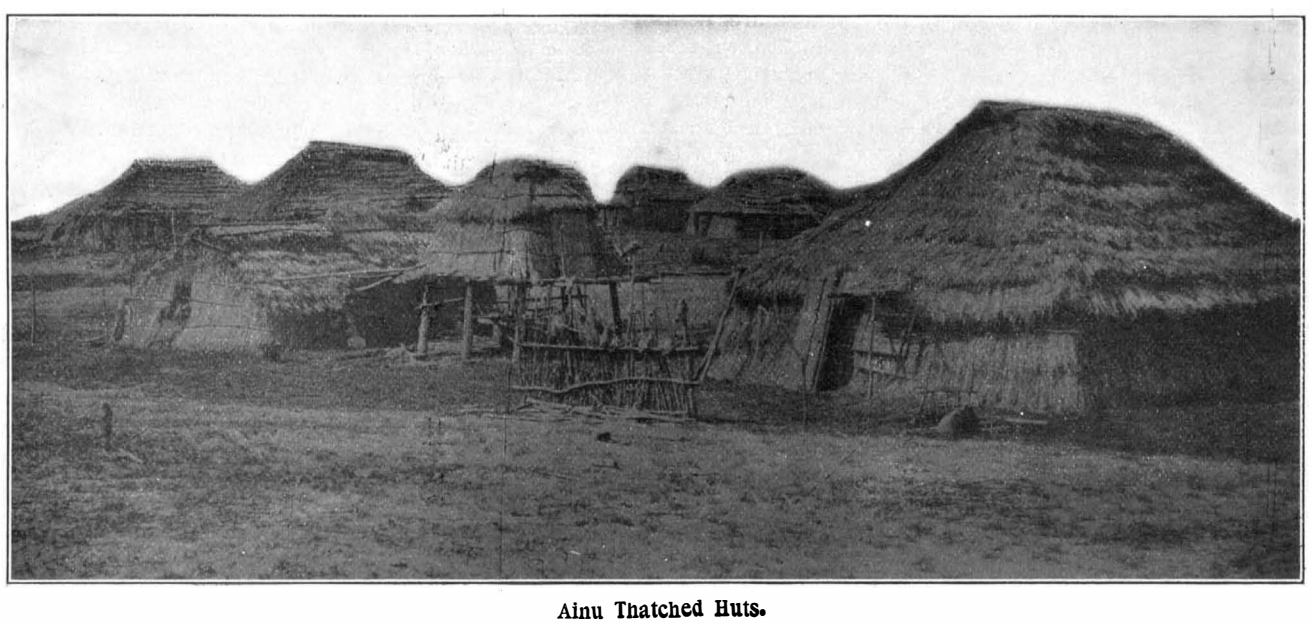

Ainu Thatched Huts.

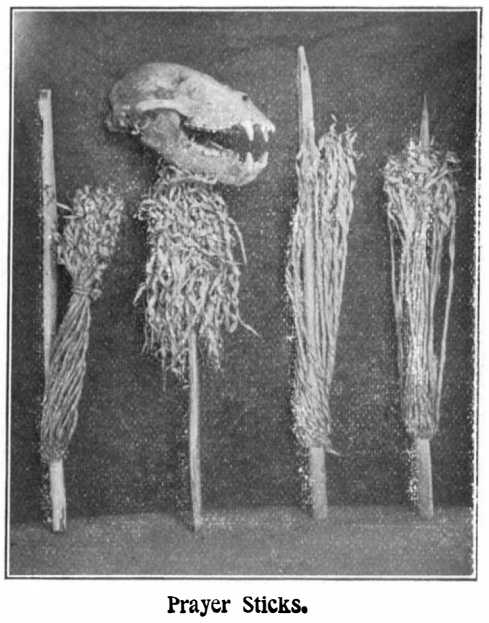

Prayer Sticks.

THE AINUS, A PRIMITIVE PEOPLE OF JAPAN.

© 1904 SCIENTIFIC AMERICAN, INC.

The people believe in a great many gods and deities, good and bad, who reside in and control the forces of nature. The inao are pieces of whittled willow wood, with the shavings left attached to the top. They are symbolic offerings in prayer, presented to the distant gods. Some are shaved upward, and others backward. They are hung up in the windows, doorways, and looked upon as charms, safeguards, and evils. They are also placed near springs, river-banks, storehouses, by the fireside, and in fact in every domain where the particular god is supposed to dwell. Near each hut is a small plot, which might be called the Ainu church or temple, for it is his special place of worship. This consists of a number of inaos or poles, upon which are placed the skulls of animals, which have been killed in a hunt or sacrifice, especially the bear. The men, old and young, with solemn faces, sit before these weird-looking objects and offer sacrifices, pour out libations of wine, and utter prayers to the gods, and implore them to reward the supplicant with success in hunting.

The material for the garments of both sexes is made from the inner bark of the elm tree, which is put into water to soak and to soften, after which it is taken out, and the fiber divided into threads and balls. It is then woven into narrow rolls of cloth on a primitive loom. The garments are quite rough, and have a faded brown color. The women are somewhat expert in executing fancy needle-work, and in their arrangement of patterns and designs, the embroidery and decoration is done with Japanese colored thread, upon the groundwork of their own elm-bark fabric. In winter the women sew bear, deer, and wolf skins over the elm fiber for greater warmth. The Ainu bear hunters undoubtedly outclass the best civilized sportsmen in bravery and courage. The latter consider one hundred yards off with a modern Winchester a safe distance for a shot for such an animal. The Ainu method, on the contrary, is as unique as it is thrilling and dangerous. The bears spend their winters in caves. To rout them out, long poles are pushed inside; if one shows himself in fair view, he falls severely wounded by the poisoned arrow. Often they are smoked out. When a bear is first shot, he savagely and furiously attacks his enemy. At close quarters, the Ainu discards his bow and arrow, awaiting one final onslaught. The wounded and enraged beast stands upon his haunches, ready to pounce upon his assailant. If the Ainu be a brave and experienced hunter, he watches his chance to make the final and fatal thrust. At the right time he rushes into the animal's embrace, and plunges his knife into his body. But he does not always escape without a reminder of the encounter. Some of the less venturesome hunters employ another method. Armed with a long, sharp-pointed spear, they await the charge, and keep the points of their weapons well hidden and covered by a piece of cloth under the arm. The animal seeing the hunter evidently without a weapon, makes a wild dash for him; quick as a flash, the hunter merely steps aside, and the beast falls upon the spear, which penetrates far into his body.

The most important ceremony of the year is the great bear feast, held in September and October. The bear is universally worshiped, and is looked upon as one of the most honorable representatives of their various gods. To give a bear festival is considered a great honor, and is likewise quite expensive, owing to the large amount of *saké* the host is required to serve. The young cub in the interval, before he is to be sacrificed, is kindly cared for and given the best food and fish obtainable, and is treated with great affection by the master of the household. For a year or more he is the "star boarder" of the family, and shares in all of the luxuries of his master's table. The ceremony is quite lengthy, and lasts several days. A few of the main features are here set forth. For the feast, the host several weeks ahead sends out invitations to his relatives and distant friends. It is the gala social event of the whole season, and the favored ones come arrayed in their best ornamented bark clothes, the women dress up their husbands in the most gaudy and showy garments, while they in turn appear in bark gowns, adorned with large earrings, necklace of glass balls with large copper pendants, and with a new coat of tattoo over their lips. It is said that the bear festival is one of the two occasions when the Ainu men and women wash their faces and hands, the other being at funerals. After general greetings have been exchanged, the host and his visitors inspect the cage quarters of the bear, after which they adjourn to the interior of the house, where the drinking of *saké* and prayer offerings are made. The mustache sticks are dipped into the *saké* and the guests throw several drops into the fire and other sacred places. After this the *saké* is quaffed in long draughts by the women and men, the beards of the men being held up with the mustache sticks. One of their number is delegated as a spokesman to go to the bear, and advise him of his forthcoming execution. This person sits down before the cage, and tells Bruin that he is about to be sent to his forefathers. He craves pardon for what he and his fellows are about to do, and hopes that he won't be angry, comforting him by saying that a great many inao, plenty of wine and millet cakes will be sent along with his body on its last journey. After this he is taken out of the cage by a noose fastened around his neck, and led around, that he may enjoy a farewell bit of freedom. He is then made a target of by the men, who proceed to tire and wear him out by shooting him with blunt-headed and wooden arrows. Then comes the crucial moment for poor Bruin. He is seized and thrown down, and after being rendered helpless, two long poles are used to end his torture. One is placed under his throat, and the other on the nape of his neck, and he is gradually choked to death. After this his form is spread out on a mat before the sacred hedge or praying place, lamentations and dancing are held, and food and drink placed before him. The men seat themselves before the mat, and again libations of *saké* are offered and consumed, which the women join in drinking, and also dance in a hilarious fashion. Soon the effects of the *saké* are shown upon the men, who usually fall upon the mat in a stupor. On the next day the bear is cut up, and certain parts distributed to the guests, who participate in it. The head is then stuffed with inao shavings, and placed upon a pole stuck in the sacred hedge. This is also accompanied by dancing, weeping, and drink-offering. Thus the bear is consigned to his fathers, and the guests disperse to their various homes, and the village settles down in quietude for another year. A great diversity of opinion exists among anthropologists as to the origin and relationship of the Ainus to other peoples. They have no linguistic affinity to any neighboring or distant nations. Baelz, a foreign investigator, owing to their rather white skin and non-savage appearance, advances the theory that they were formerly allied to a branch of a European Caucasian race, which became divided and separated by encroachments of Mongol-Turkish invasions. Prof. Franz Boas, however, considered the foremost American authority, disagrees with this statement, and is of the belief that they probably belonged to the East Siberian and Asiatic tribes. The accompanying illustrations are reproduced through the courtesy of the American Museum of Natural History.

THE MAKING OF ASBESTOS FIRE CURTAINS AND FIREPROOF FABRICS.

(Continued from page 120.)

pure cotton fresh from the plant on which it grows, instead of a mineral substance that in its original state was mined like a lump of anthracite coal.

A carding machine, similar to that employed in preparing wool, cotton, or flax fibers before spinning, has been adopted by the manufacturers. The problem of mechanically combing these fibers was no small one, and the carding takes place in a machine having a large central rotating cylinder covered with card clothing, that is, strips of leather set with projecting wires termed teeth. Around the main cylinder there are a number of smaller cylinders, also provided with card clothing, which engages the teeth of the central cylinder rotating in the reverse direction.

This machine straightens out the fibers and lays them parallel; after passing through the first breaker, they are fed into a second carding engine or breaker, which is set to a finer gage than the preceding. A third and last carding process takes place in a machine called a finisher or condenser, when all the irregularities are eliminated, and the fibers are stripped from the final cylinder by means of a fly-comb, and are converted into unspun threads, when they are delivered on a traveling apron or endless band, and are gathered into rows by reciprocating scrapers; they are then condensed, and the process is continued in the coiling cans.

In spinning the yarn, the rovings are delivered to the spindles on a carriage, which then recedes, when the fibers are twisted, and returns when the spun asbestos yarn is wound on the spindles. The spinning frames do not draw the yarn, and no strain is placed on it until after it is twisted. This brings the manufacture of the fireproof material to a point where it is to be woven into cloth, packing, or other forms; for asbestos is used for divers other purposes than those appertaining to theaters.

While adulterated asbestos may be used in some of the mechanical arts, for theatrical hangings its purity should be 100 per cent; it then forms one of the safest barriers against the calamity of fire. As a matter of fact, much of that which is termed commercially pure asbestos cloth contains from five to twenty per cent of combustible matter, but absolutely pure American-made cloth may be obtained, where price is not a primary consideration.

Not only is purity essential in asbestos cloth where used for protection against fire, but strength as well; and after asbestos is subjected to a high temperature, it has a tendency to powder, when, owing to its weight, it may break through, and its utility be impaired.

One of the leading manufacturers has made an improvement in weaving asbestos cloth for theater curtains; it consists of two strands of asbestos spun around a strand of high-temperature-melting brass wire, so that the wire is completely embedded and concealed. These asbestos metallic strands form the warp, so that the threads run the long way of the cloth when finished. The weft, or filling-in cross threads, is made of plain, pure asbestos.

Such a curtain will stand well under a severe high-temperature test without breaking. The illustrations show clearly the different mechanical processes for converting the mineral into the finished cloth. Not only theater curtains, but set scenery of all kinds may be constructed of asbestos. Scenic artists find it more difficult to paint, but the finer textures may be utilized for this purpose; and although asbestos cloth does not take colors as satisfactorily as cheese cloth and burlap, yet its use should be provided for wherever audiences are to be assembled.

Flooring and woodwork in general may be easily replaced by compressed asbestos fiber board, and it has been shown that the latter may be stained, polished, and finished to as high a degree as wood. All the upholstery should be of pure asbestos cloth, and carpeting is also made to take the place of the combustible vegetable and animal fibers now used so extensively. One of the peculiar properties of asbestos carpeting is that the longer it is in service, the tougher it becomes.

Asbestos is utilized in the arts in many other forms than cloth; it may be worked into a pulp, and a fireproof paper is obtained. This paper is now used on roofs, between walls, flooring, etc. Fireproof rope three-eighths inch in diameter for the suspension of curtains and other uses is made having a tensile strength of 1,650 pounds per foot. High-grade asbestos plaster is fireproof, soundproof, and hangs together with great tenacity when subjected to water.

Asbestos mineral with rock as it comes from the mine costs $200 per ton, but after it is stripped the long fibers are worth $1,500 per ton. When these are made into cloth it sells for $3 per square yard; when made into curtains, the sewing is done with asbestos thread.

The Current Supplement.

The current SUPPLEMENT, No. 1466, opens with an excellent description, illustrated by several large engravings, of the construction of Globe Island Bridge, Sydney, New South Wales. Electrical engineers will read with interest an article in which the results of the German high-speed railway trials are critically analyzed. The article on the Edison Portland Cement Works is concluded. The summary of the grants made by the Carnegie Institution is concluded. Mr. Samuel P. Langley, Secretary of the Smithsonian Institution, presents an interesting biography of James Smithson, the founder of the institution that bears his name. The article is particularly timely, inasmuch as Smithson's body has been transported from Genoa to Washington, in order that it may rest in the grounds of the Smithsonian Institution. Mr. W. A. Del Mar attacks the problem of melting sleet on a third rail, and shows what the prospects of success are of heating the rail. A new panoramic telescope has been exhibited in Germany, which gives to the man behind the gun an opportunity of completely examining a field of 360 degrees without moving either himself or the eyepiece of the instrument. The instrument is described in full. The Paris Automobile Show description is continued.

Transatlantic Turbine Liner.

The "Victorian," the first of the Allan Line's new turbine steamers for the Atlantic service, is fast nearing completion in Clarke & Co.'s shipbuilding yard at Belfast. She will probably make her first visit to Canada during the fall of this year.

Turbine steamers in cross-Channel service have proved a great success, chiefly because of insuring more comfort to passengers in rough weather, but great modifications and alterations in the system had to be devised to suit Atlantic requirements.

While the French submarine boat "Narval" was leaving Cherbourg Harbor recently, she came into collision with a tugboat which was traveling at right angles to the course of the submarine. The officer of the latter observed the approaching tug, and immediately reversed his engines, the "Narval" at the time making a speed of five knots. Although the momentum of the submarine was thus considerably reduced, she struck the tugboat with sufficient force amidships to force her nose through the hull of the latter to the extent of 16 inches, and the tug ultimately foundered, when the nose of the "Narval" was withdrawn. This accident affords a conclusive estimate of the strength and power of these submersible craft for ramming purposes, when driven at full force against another craft; and, according to French Admiralty experts, opens new possibilities concerning naval tactics.

© 1904 SCIENTIFIC AMERICAN, INC.

Patent Department

COOKING DEVICE FOR CAMPING PURPOSES.

In the accompanying illustration we show a device which will be found very convenient for camping

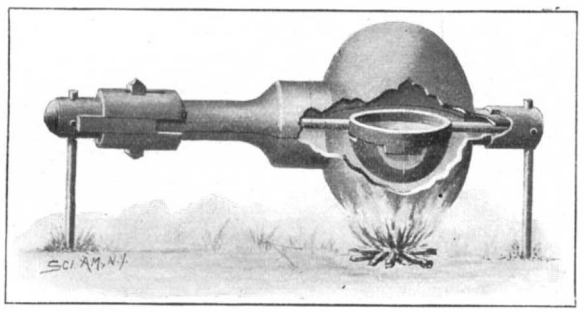

COOKING DEVICE FOR CAMPING PURPOSES.

parties, as it provides a simple means for frying, baking, or otherwise cooking food, and furthermore may be readily packed up and stored away when moving camp. The device consists of two bowl-shaped sections which may be fitted together to form a closed chamber within which the food may be cooked without coming in contact with the flames of the camp fire. Within the chamber is a pan on which the food to be cooked is placed. The pan is provided with handles at each end, which pass through tubular openings formed by trough-shaped extensions on the bowl-shaped section. The handles of the pan at their outer ends are formed with enlarged portions, on one of which a flange is formed which fits over the bowl extensions at that end, firmly locking them together. At the opposite end the bowl extensions are locked together by a sleeve which is slipped over them; this sleeve is held in place by bolts passing through slots therein and threaded into the handle of the pan. The device is supported on stakes which are driven into the ground and at their upper ends enter sockets in the enlarged portions of the pan handles. The longer handle is made tubular so that when the device is not in use the stakes may be packed therein. A cap is provided to close the end of this handle. When desired the device may be taken apart and the bowl sections used as saucepans. It will be observed that a bowl is secured under the pan. Water may be placed in this bowl to furnish the necessary moisture for the food that is being cooked. The inventor of this device is Mr. James Henault, 1428 West 12th Street, Los Angeles, Cal.

AUTOMATIC TRACK GAGE.

The automatic track gage which is illustrated herewith may be readily attached to the ordinary handcar in such a manner that the exact elevation of curves and the variations in the distances apart of the rails of a track may be accurately and quickly ascertained. In other words the exact state of the track, both as to gage and level, may be observed at a glance by the operator of the machine. The gage comprises an inverted U-shaped frame to the ends of which flanged wheels are journaled. These wheels are adapted to run on the tracks in advance of the handcar to which the gage is attached by means of two bars. The horizontal bar of the frame consists of two members which are connected by a tubular sleeve slipped over their inner ends. One end of this sleeve is connected with one

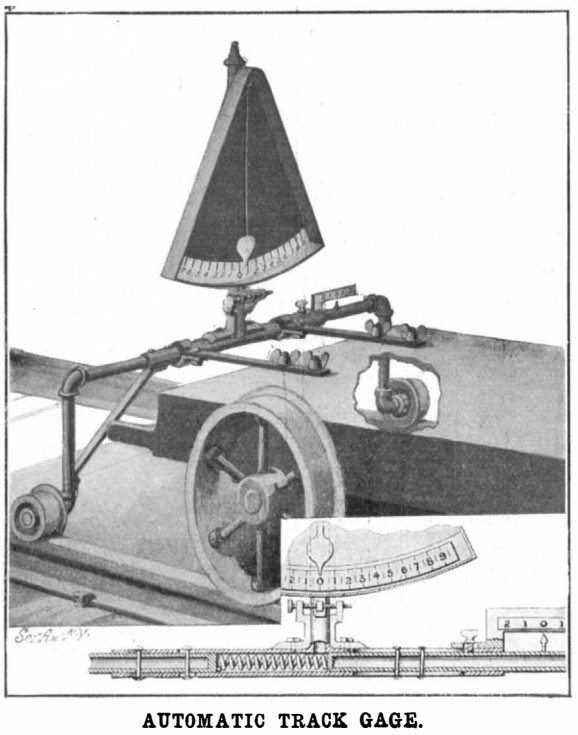

AUTOMATIC TRACK GAGE.

of the arms by a brace bar, as shown in our illustration. The other arm is secured to the sleeve by bolts which pass through slots in the sleeve, thus permitting a limited sliding movement of the arm in the sleeve. A coil spring in the sleeve exerts a constant outward pressure on this arm and a pointer on the arm indicates the position of the arm on a gage scale attached to the sleeve. Centrally secured on the sleeve is a standard bearing a segmental dial or measuring scale. A heavy pendulum pivoted at the upper end of the standard bears a pointer which, when the device is level, lies directly in line with the zero mark on the dial. In operation any irregularities in the track will be immediately indicated either on this dial or on the gage scale. If the track is not level, the pendulum will swing to one side or the other indicating exactly how much out of true the track is; while if the width between the rails of the track varies from the standard the movable arm will either be crowded inward or permitted to move outward correspondingly, and indicate the variation on the scale. The gage scale and the dial are each made adjustable so that they can be accurately set to bring the zero marks in line with their respective pointers. The inventors of this device are Messrs. Thaddeus Ellis and George H. Purvis, of Lester, Wash.

SPUR ATTACHMENT FOR LEGGINGS.

A recent invention provides an improved detachable spur attachment for leggings such as are used by cavalrymen and other horsemen. The device is so arranged as to permit ready and convenient removal of the yoke and rowel from the legging whenever the horseman so desires. As shown in our illustration, the design of the spur attachment is very simple. A strap of stiff leather is secured to the legging at the rear, preferably on the inside. A portion of this strap projects below the legging, and carries a metallic disk on which the yoke is removably secured. Thus the

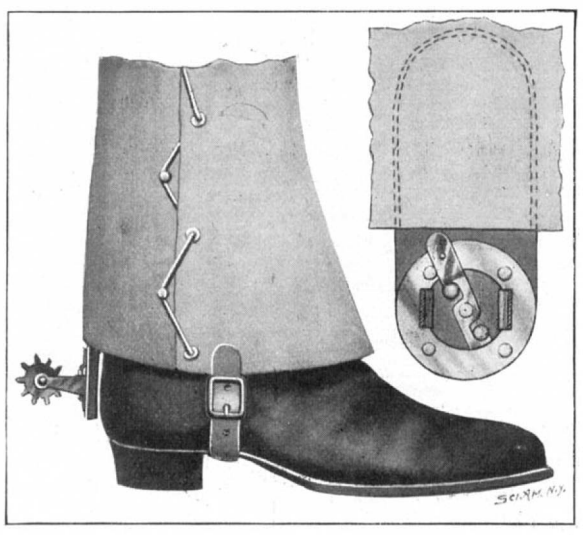

SPUR ATTACHMENT FOR LEGGINGS.

spur is held at about the same position with respect to the foot that spurs are ordinarily held. In our detail view the rowel and part of the yoke have been broken away, to clearly show the simple locking means used for holding the yoke to the disk. It will be observed that two pins are secured to the disk, and project through openings in the base plate of the yoke. A lock bar is fulcrumed centrally on the outer face of the base plate, and is adapted to be swung into engagement with notches in the pins. One end of the lock bar is extended to form a handle. A pin secured to this extension snaps into a registering aperture in the disk when the bar is in locked position. Now, if for any reason the horseman should find it desirable to remove the spur, he needs simply to swing the lock bar out of engagement with the pins, when the yoke and its rowel may be detached from the legging. The inventor of this improved spur attachment is Capt. William Carey Brown, First U. S. Cavalry, of Fort Clark, Texas, Brackettville P. O.

A HANDY COIN HOLDER.

A simple little device has been invented by Mr. Adna G. Bowen, of 401 West 124th Street, New York city, which is adapted to hold coins of a predetermined number. This improved holder is so arranged as to closely fit both new and worn coins. This is an important point, for it is a well-known fact that a number of new coins makes a much higher pile than the same number of old coins, and heretofore it has been necessary to make three sizes of coin holders for every denomination.

As shown in our illustration, the body of the clip is cylindrical in form and has an opening along the top, throughout its entire length, of about 150 degrees in width. It is made of spring metal, which yields when the coin is pressed endwise into the holder, and after the coin has passed into the cylinder body, the spring metal sides close over the coin, and hold it from falling out of place. At the ends of the holder tongues are provided, which give sufficiently to allow the coins to pass into the body of the holder, yet are sufficiently strong to compel the same to stand upright in mass. These tongues normally incline inwardly to a sufficient degree, and have sufficient spring to

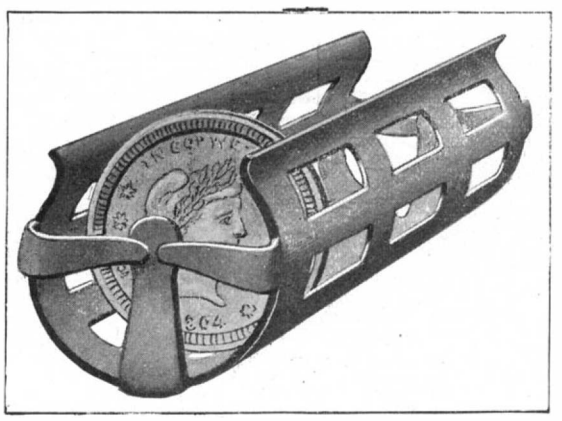

A HANDY COIN HOLDER.

take up any variation in the thickness of the quantity of coins interposed between them.

LIFTING JACK.

A recent invention provides a very simple device for lifting the axles of vehicles, to permit removal of the wheels. A glance at the illustration will reveal the construction of the device, and the method of operating it to lift the axle. It comprises two wooden bars and a swinging or suspension bar, which are all pivoted together at a common point by a single bolt. The longer one of the wooden bars is provided with a handle, by which the device may be operated. The hanger piece consists of a flat metallic bar bent to form a foot piece at its lower end. It is loosely suspended from the bolt between the bars, being spaced apart from the latter by means of washers to permit free movement. In using the lifting jack, the wooden bars are placed astride of the axle. The freely-moving hanger falls against the axle, and quickly adjusts itself to any height of the axle when it is lifted, so that when the handle of the longer bar is pulled backward or forward, according to the position in which it is placed, the hook of the hanger is brought upwardly against the axle, and lifts the wheel clear of the ground, after which a movement of the hand or foot of the operator presses the shorter bar into engagement with the ground, and firmly secures the jack in position. When the axle is thus suspended, it is so securely held by the jack that a chance lateral movement of the vehicle or a forward or backward movement of ten or twelve inches may be made without loosening or dropping the axle, because the swinging hanger adjusts itself to the position of the axle. In fact, the hanger prevents the vehicle from moving down a slight incline, such as a slanting washing floor. The bars of the jack are of sufficient height to permit the device to be easily adjusted to an axle without stooping or requiring the operator to pass between the wheels and the body or the shafts of the vehicle. The Rev. M. M. Moore, Sr., of Santa Barbara, Cal., is the inventor of this improved lifting jack.

A dispatch from Winnipeg, Manitoba, says that Hugh Mann, brother of D. D. Mann, vice-president of the Canadian Northern Railroad, was accidentally killed on September 11 near Erwood, N. W. T., while superintending the operation of a new track-laying machine of which he was the inventor and which was being used for the first time.

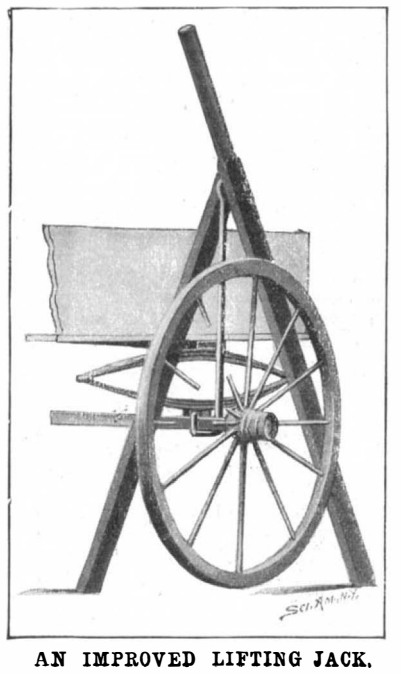

AN IMPROVED LIFTING JACK.

© 1904 SCIENTIFIC AMERICAN, INC.

RECENTLY PATENTED INVENTIONS.

Hardware.

BRACE.—A. S. E. METCALF, Driscoll, N. D. In this patent the invention relates particularly to improvements in a combined brace, chuck, and wrench, the object of the inventor being the provision of a device of this character having a wide range of adjustments for holding bits and drills and for removing nuts of various sizes.

Miscellaneous.

MEANS FOR CONSTRUCTING CISTERNS OR THE LIKE.—W. SKINNER and C. LINDSEY, Wellington, Kan. Though applicable to the building or erection of various structures of masonry, the improvements are intended more especially for use in the construction of cisterns, sewers, caves, and the like; and the principal object is to provide means for this purpose which are both effective and reliable in use or operation besides being quickly applied and removed and also possessing capacity for long and repeated service.

BOTTLE-STOPPER.—A. BUCKMAN, Brookview, N. Y. Though applicable to nearly all forms of bottles employing a cork or similar stopper, the improvements are intended more especially for use in connection with beer and similar bottles, as well as medicine-bottles and the like. One of the principal objects is to provide a cork or stopper with means permanently applied thereto by which the stopper may be readily extracted from the mouth of the bottle without the use or aid of a corkscrew.

TIME HAND-STAMP.—W. F. BARTHOLOMEW, New York, N. Y. This inventor's object is to provide a stamp arranged with interchangeable dates, a fixed time dial-stamp, and a movable pointer-stamp, together with a face-indicating device to permit of quickly and correctly setting the pointer-stamp to allow of correctly stamping the date and time on letters, receipts, sale slips and other matter.

SUSPENDING ATTACHMENT FOR GAME BAGS, ETC.—G. F. CLARKE, Toronto, Canada. The purpose in Mr. Clarke's invention is to provide an attachment for suspending a game or other bag from the shoulders and body of a person so as to support the receptacle upright and hugged closely to the body in a perfectly secure manner, leave one shoulder and both arms free, and prevent displacement of the bag when the wearer assumes a leaning, kneeling, stooping, or crouching position, or when walking, or bicycling. The improvement is applicable to haversacks, school bags, and cartridge bags.

DEVICE FOR USE IN SHARPENING PENCILS.—W. S. DOE, Jersey City, N. J. In this instance the object is to provide a device for use in sharpening pencils and the like which is simple and durable in construction, not liable to get out of order, and arranged to permit the use of an ordinary knife to cut down the wood and core of the pencil to give a fine regular finish to the sharpened end.

WATER-TANK.—J. T. DONAHOO, Edgar, Neb. The improved tank in the present case is so constructed as to resist great pressure from without or within, and while it is adapted for general use it is particularly designed by the inventor for employment in connection with an air forcing and pressure apparatus.

BRACKET.—J. GARDNER, Lismore, New South Wales, Australia. The invention is an improvement in locking angle-brackets for use on writing desks in schools, warehouses, etc.; also for shelves for displaying goods at any angle, for steps, trestles, folding wheelbarrow-legs, stools, and other locations wherein an adjustable bracket is desired.

JAR-CLOSURE.—O. N. HOFFMAN, St. Johnsville, N. Y. This invention refers to closures for fruit-jars or other similar packing-receptacles, and has for its object to provide details of construction for a closure which are very simple, easy to apply and release, and that will effect a reliable air-tight fastening of a fruit or other jar after filling the same and dispense with the use of tools to close or open the jar.

FOLDABLE STOOL.—W. B. S. HUSSA, West Hoboken, N. J. Mr. Hussa's invention relates to improvements in foldable stools; and his object is to provide a construction in which all of the parts may be packed in a hollow member which in the assembled condition of said parts forms an essential part of the stool structure, whereby the article may be easily carried in the hand or pocket.

WOOD-HOLDER.—J. E. WALLIN, Tacoma, Wash. The object of the invention is to provide a novel portable device for holding a billet of wood in an upright position to enable the cutting of shavings therefrom to use as kindling material in the starting of fire to ignite larger wood in a stove or range.

Designs.

DESIGN FOR A GLOVE.—F. SCHMIDT, New York, N. Y. This ornamental design for a glove comprises a double U-shaped herring-bone stitching of three rows on the back of the glove. The open end of the design extends to the knuckles and the lower end about on a line with the base of the thumb.

NOTE.—Copies of any of these patents will be furnished by Munn & Co. for ten cents each. Please state the name of the patentee, title of the invention, and date of this paper.

Business and Personal Wants.

READ THIS COLUMN CAREFULLY.—You will find inquiries for certain classes of articles numbered in consecutive order. If you manufacture these goods write us at once and we will send you the name and address of the party desiring the information. **In every case it is necessary to give the number of the inquiry.**

MUNN & CO.

Marine Iron Works. Chicago. Catalogue free.

Inquiry No. 5049.—For makers of castings for a small steam engine, for driving a small generator of 10 volts.

"U. S." Metal Polish. Indianapolis. Samples free.

Inquiry No. 5050.—For manufacturers of supplies for making rubber stamps.

AUTOS.—Duryea Power Co., Reading, Pa.

Inquiry No. 5051.—For manufacturers of very light motors.

For hoisting engines. J. S. Mundy, Newark, N. J.

Inquiry No. 5052.—For the address of the manufacturers of the Universal American accordion pleating machine.

Handle & Spoke Mchy. Ober Mfg. Co., 10 Bell St., Chagrin Falls, O.

Inquiry No. 5053.—For dealers in second-hand engine lathes.

Sawmill machinery and outfits manufactured by the Lane Mfg. Co., Box 13, Montpelier, Vt.

Inquiry No. 5054.—For the address of the manufacturers of the Spencer automatic damper regulator.

American inventions negotiated in Europe, Felix Hamburger, Equitable Building, Berlin, Germany.

Inquiry No. 5055.—For manufacturers of machinery used in cider-making plants.

Edmonds-Metzel Mfg. Co., Chicago. Contract manufacturers of hardware specialties, dies, stampings, etc.

Inquiry No. 5056.—For machinery for extracting fiber from flax straw.

Inventions developed and perfected. Designing and machine work. Garvin Machine Co., 149 Varick, cor. Spring Sts., N. Y.

Inquiry No. 5057.—For manufacturers of a complete apparatus and machinery for making concentrated acetic acid.

FOR SALE.—Patent on finest spike and bolt puller in existence. No. 714,107. For particulars write W. L. Harris, Central City, W. Va

Inquiry No. 5058.—For parties to manufacture a registering face ior a water meter.

Empire Brass Works, 106 E. 129th Street, New York. N. Y., have exceptional facilities for manufacuring any article requiring machine shop and plating room.

Inquiry No. 5059.—For manufacturers of gasoline lamps.

The largest manufacturer in the world of merry-go-rounds, shooting galleries and hand organs. For prices and terms write to C. W. Parker, Abilene, Kan.

Inquiry No. 5060.—For manufacturers of large earthen vats.

The celebrated "Hornsby-Akroyd" Patent Safety Oil Engine is built by the De La Vergne Refrigerating Machine Company. Foot of East 138th Street, New York.

Inquiry No. 5061.—For makers of all kinds of slot machines.

FOR SALE.—SCIENTIFIC AMERICAN, twenty volumes from 1872 to 1881, two volumes to a year, in perfect condition. Make us an offer. David Kahnweiler's Sons, 437 Pearl Street, New York.

Inquiry No. 5062.—For makers of flat steel or phosphor bronze springs, similar to clock springs, of special dimensions.

Manufacturers of patent articles, dies, metal stamping, screw machine work, hardware specialties, machinery and tools. Quadriga Manufacturing Company, 18 South Canal Street, Chicago.

Inquiry No. 5063.—For makers of Mrs. Teller's cooking knife and of hardware specialties for the mail order trade.

Wanted—Revolutionary Documents, Autograph Letters, Journals, Prints, Washington Portraits, Early American Illustrated Magazines, Early Patents signed by Presidents of the United States. Valentine's Manuals of the early 40's. Correspondence solicited. Address C. A. M., Box 773, New York.

Inquiry No. 5064.—For manufacturers of or dealers in diamond drilling machines, also for parties doing such work.

SOUTH AMERICAN AGENCY WANTED.—Reliable party resident in South America desires to represent or act as selling agent for manufacturing or export firms. Address A. M.,
122 Front Street, New York.

Inquiry No. 5065.—For manufacturers of steel flumes.

The Imperial and Royal Austro-Hungarian Embassy has received a new supply of the publication referring to the international competition for prizes offered by the Austrian Government for plans for best boat-raising works in the construction of the Donau-Oder Canal. Parties interested in the mentioned competition can obtain a copy of said booklet at the Embassy's office 1304 Eighteenth Street,
Washington, D. C.

Inquiry No. 5066.—For makers of machinery for making paper pulp from wood. also for dealers in pulp.

Wanted—A waterproof cement for use on fabric and leather, which will be strong, will set readily, and can be used without much heat.
Address A. C., Box 773, N. Y.

Inquiry No. 5067.—For a large hydraulic press capable of pressing 500 pounds to the inch on the platen; size of platen 5 x 3 feet, 6 feet preferred; also power pump for same; for makers and second-hand dealers in such.

Inquiry No. 5068.—For addresses of manufacturers of goods of all kinds.

Inquiry No. 5069.—For makers of electrical vibration apparatus for massage, etc.

Inquiry No. 5070.—For tin cans of from ⅛ to 1 pound in size, also for parties to print and glue wrappers on such.

Inquiry No. 5071.—For apparatus for the destructive distillation of wood.

Inquiry No. 5072.—For makers of portable band saws for sawing logs into stave wood.

Inquiry No. 5073.—For makers of wrought iron fences and gates, also chairs for use in summer gardens.

Inquiry No. 5074.—For addresses of gas, mineral oil, gasoline, motor, etc., firms of America.

Inquiry No. 5075.—For makers of metal, celluloid and aluminium novelties.

Inquiry No. 5076.—For manufacturers of or parties making cutting or grinding machines for brick.

Inquiry No. 5077.—For makers of an electrically heated iron used by veterinary surgeons to burn the legs of horses.

Inquiry No. 5078.—For dies and machines for embossing photographic cards, also a beveling machine for all kinds of cardboard.

Inquiry No. 5079.—For makers of machinery for handling peanuts, including hulling, etc.

Inquiry No. 5080.—For machinery for making lead pipe of the size of ½ inch upward.

Inquiry No. 5081.—For makers of steel hooks and eyes, such as used on waistbands.



HINTS TO CORRESPONDENTS.

Names and Address must accompany all letters or no attention will be paid thereto. This is for our information and not for publication.

References to former articles or answers should give date of paper and page or number of question.

Inquiries not answered in reasonable time should be repeated; correspondents will bear in mind that some answers require not a little research, and, though we endeavor to reply to all either by letter or in this department, each must take his turn.

Buyers wishing to purchase any article not advertised in our columns will be furnished with addresses of houses manufacturing or carrying the same.

Special Written Information on matters of personal rather than general interest cannot be expected without remuneration.

Scientific American Supplements referred to may be had at the office. Price 10 cents each.

Books referred to promptly supplied on receipt of price.

Minerals sent for examination should be distinctly marked or labeled.

(9304) H. F. S. says: 1. In your issue of January 2, in Notes and Queries, No. 9264, you say that water can only be pulled 33.9 feet with a siphon, in which I agree with you; but it has been disputed in our town. One man claims he raised water out of a well 70 feet deep, from the bottom; took all the water out. Now is this possible by just running an air-tight hose up out of the well and down a hill below the level of the bottom of the well? A. Water cannot be raised higher than stated in question 9264. The story of the man with the hose needs explaining by the man who told it. 2. Please explain why water will siphon at 700 deg. F., as you stated in query No. 9264. A. The 700 deg. F. was a misprint; it should have been 70 deg.

(9305) J, H. R. asks: Will you please inform me how the degrees of very high temperature are measured, say temperature of 2,000 deg. or 3,000 deg.? How is it ascertained at what temperature iron will melt? A. The instruments by which high temperatures are determined are called pyrometers. There are many kinds of these. Some depend upon the pressure of a gas held at a constant volume while heated; others utilize the calorimetric value of the heat acquired by a refractory metal, such as platinum or nickel, while exposed to a high temperature; others employ the change in electrical resistance of platinum when heated, and some use the light radiated from a highly heated material to determine its temperature. This last method is used to determine the temperature of a Bessemer converter. Finally, fusible substances such as Seger's cones are employed to determine the temperature of an oven in which pottery is baked. We have published at different times twelve articles in the SCIENTIFIC AMERICAN SUPPLEMENT upon pyrometers, which we can send for 10 cents each. The whole matter is fully treated in a recent book, "High Temperature Measurements," by Bondouard, which we can furnish for $3 by mail.

INDEX OF INVENTIONS

For which Letters Patent of the United States were Issued for the Week Ending January 26, 1904,

AND EACH BEARING THAT DATE

[See note at end of list about copies of these patents]

Abrasive wheel, D. B. Hyde ... 750,653
Account, credit, W. R. Swan ... 750,557
Acetylene generator, W. S. May ... 750,674
Acid, making dialkyl barbituric, M. Engelmann ... 750,627
Adding machine, P. H. Thompson ... 750,734
Adjustable wrench, J. W. Davis ... 750,523
Animal heat protector, F. K. Walther ... 750,505
Animal trap, M Laramie ... 750,661
Annunciator, L. Schmidt ... 750,309
Atomizer, F. B. Comins ... 750,260
Atomizer, F. V. Braymer ... 750,521
Attrition disks and the product thereof, manufacturing, J. C. Graft ... 750,639
Axle box and spindle, G. M. Martien ... 750,292
Bag turner, H. Roppel ... 750,703
Baking mold, C. Forcke ... 750.445
Baking pan, multiple, A. E. Bronson ... 750,344
Baling press, J. S. Tuttle ... 750,324
Banana shipping case, F. Schmitz ... 750,783
Bar cutter, H. A. Christensen ... 750,599
Barrel hoop, E. I. Braddock ... 750,520
Barrel support, E. E. Cross ... 750,613
Barrels, etc., making metal, H. S. Reynolds 750,394
Basket handle, B. J. Ragatz ... 750,699
Battery. See Electric battery.
Battery receptacle and bell support, combined electrical, W. A. Harvey ... 750,646
Bearing, shaft, J. J. Harrington ... 750,362
Bed, folding, V. J. Gillett ... 750,762
Belt and garment fastener for supporting skirts or trousers, G. Schmitt ... 750,709
Belt fastening device, driving, A. H. B. Sharpe ... 750,494
Belt holder or attaching device, H. Parkes ... 750,484
Belting, C. E. Newton ... 750,299
Bicycle attachment, A. L. Porter ... 750,393
Bicycle attachment, J. McLarty ... 750,480
Bicycle lantern safety arrangement, A. Reimann ... 750,556
Bicycle, motor, W. A. Suddard ... 750,317
Binder, temporary, J. L. C. Montague ... 750,676
Binding post, L. Steinberger ... 750,723
Blind lock, window, W. F. Stough ... 750,730
Blow testing apparatus, H. G. Cady ... 750,593
Boiler brace, E. Cook ... 750,607
Boiler cleaning compound, J. McCormack ... 750,682
Book, check, E. F. Green ... 750,452
Book cover cleaning and polishing machine, T. Daniels ... 750,267
Book, roll note, O. Hulback ... 750,651
Boot or shoe holder, W. C. Benkert ... 750,570
Bottle, C. Clark ... 750,258
Bottle, C. B. Rhoads ... 750,303
Bottle, non-refillable, C. M. Drennan ... 750,755
Bottle valve, J. J. Brown ... 750,585
Box fastener, E. T. Reilly ... 750,700
Box lid support and label holder, combined, J. Jones, Jr ... 750,655
Brake beam, metallic, A. Stucki ... 750,732
Brake shoe, Stimson & Parke ... 750,728
Brick handling apparatus, L. F. Hart ... 750,645
Brick kiln furnace, E. M. Clark ... 750,600
Bridge construction, J. F. Morton ... 750,475
Brooder, W. H. Bennett ... 750,335
Building block and wall, C. N. Allerding ... 750,562
Building material, composite, R. Hartman ... 750,456
Buoy for sunken vessels, J. F. Tribble ... 750,322
Bushing for junction boxes, outlet, F. W. Erickson ... 750,352
Button, collar, S. H. Hall ... 750,360
Button, collar, J. Eckstorm ... 750,622
Button, cuff, E. P. Happich ... 750,643
Button, suspender, A. Bowers ... 750,580
Cabinet, I. Mason ... 750,673
Can filling machine, F. B. Fulton ... 750,760
Canning device, fruit or vegetable, F. G. Slemmer ... 750,407
Candle molding machine, S. H. Leavenworth 750,662
Car, combined freight and dump, A. Lipschutz ... 750,670
Car coupling, A. Moffitt ... 750,383
Car door, grain, S. A. Bushey ... 750,431
Car fender, E. Sprich ... 750,719
Car frame, Lindstrom & Streib ... 750,290
Car or barn door, G. B. Murray ... 750.679
Car side bearing, universal street, J. E. Norwood ... 750.481
Car wheel grinding device, P. F. McCormick 750,479
Cars, railway carriages, or the like, bogie or truck for tramway, A. S. Nelson, et al ... 750,387
Carbureter, W. L. Severance ... 750,311
Carbureter, H. B. Cornish ... 750,433
Carbureter, F. Harmany ... 750,764
Carousel, water, A. Meffert ... 750,472
Carrier. See Fowl carrier.
Cart cover, S. Kurzman ... 750,467
Cartridge, J. M. Edmunds ... 750,623
Cash register and indicator, J. P. Emory ... 750,272
Casing head and tubing anchor, J. C. Boyce 750,428
Casket holder, G. Arpin ... 750,245
Casket holder, G. F. Honold ... 750,282
Centrifugal apparatus, A. Liedbeck ... 750,668
Centrifugal machine, H. de Raasloff ... 750,698
Chain wrench, double acting, W. H. Downing ... 750,440
Cheese holder, I. I. Eklund ... 750,756
Churn, J. S. Lindquist ... 750,380
Cigar cutter, W. M. Roberts ... 750,305
Cigarette machine, G. M. Calberia ... 750,254
Cigarette or cigar holders, etc., mold press for making, E. Simon ... 750,406
Cigarette paper with leaf metal, apparatus for coating, G. M. Calberla ... 750,255
Clasp, A. Person ... 750,487
Clasp, O. J. Jones ... 750,656
Clock and money box, coin controlled, L. F. Kleeman ... 750,374
Clock case, A. D. Blodgett ... 750,787
Clock, electric, F. Schmidt ... 750,492
Closure, E. E. Chapman ... 750,257
Coal separator, G. A. Kenner ... 750,657
Coin controlled apparatus, M. Sielaff ... 750,314
Coin receiving, delivering, sorting, registering, and detecting machine, Spear & Moriarty ... 750,718
Coke oven door, B. Troutman ... 750,323
Coloring apparatus, yarn, A. Fornander ... 750,758
Comb for applying liquid to the scalp, J. B. O'Higgins ... 750,388
Combustion motor, J. F. Bentz ... 750,336
Compressor, J. Shipway ... 750,313
Concentrator and amalgamator, combined, H. J. Russell ... 750,706
Condiment holder, composite, L. B. Parker ... 750,687
Container joint, W. L. Austin ... 750,565
Conveyor, pneumatic, M. J. Foyer ... 750,356
Cooker, steam, C. Cannom ... 750,596
Corkwood, P. F. Lenhart ... 750,548
Corn husker, C. G. Billings ... 750,426
Corn husking machine feeding device, J. R. Hall ... 750,642
Corn-shredder, N. N. Windingstad ... 750,329
Cotton gin, E. R. Barber ... 750,567
Cranes, electric gear for, O. Kammerer ... 750,370
Crematory, Haycock & McDermott ... 750,457
Curling iron case, C. O. Sterling ... 750,724
Curtain and shade adjuster, window, H. P. Adams ... 750,332
Curtain support, extensible, E. W. Mathewson ... 750,776
Cutter heads, instrument for determining the position of cutters on molding, J. Fay ... 750,629
Cycle mud guard, Neinens & Kleinbielen ... 750,386
Dental appliance, W. M. Dailey ... 750,615
Desk lock, L. Moore ... 750,384
Desk, school, J. F. Field ... 750,527
Developing apparatus, daylight plate, J. Lesperance ... 750,665
Disinfecting paper money, apparatus for, C. B. Clark ... 750,347
Ditching machine, J. Page ... 750,686
Domestic heater, C. A. Commiskey ... 750,606
Door, air, J. T. Deviese ... 750,617
Door check, R. W. Habbard ... 750.650
Door fastener, portable, R. F. Poenitz ... 750,692
Door hanger, F. Burdett ... 750.589
Door hanger, F. B. Cook ... 750,608
Door opening attachment, E. F. Hicks ... 750,363
Douche, nasal, F. W. Moffitt ... 750,297
Draft connection, L. Keding ... 750,544
Draft lightener, B. H. Kellogg ... 750,462
Draft regulator, automatic, G. O. Lindgren ... 750,669
Drier. See Vibratory drier.
Dry kiln, E. F. Rouse ... 750,306
Drilling machine, H. Balluet ... 750,423
Drilling tool, B. M. W. Hanson ... 750,537
Dust collector, A. C. Brantingham ... 750,342
Dyeing, etc., apparatus for, F. Cleff ... 750,601
Ear drum protector, J. A. R. Elliott ... 750,625
Elastic band or strap, J. D. O'Brien ... 730,780
Electric battery, W. S. Ryan ... 750 250
Electric brake, G. C. Anthon ... 750,421, 750,422
Electric brake, P. P. Crafts ... 750,434
Electric furnace, R. C. Contardo ... 750,753
Electric light bulbs, tool for removing or replacing incandescent, A. T. Speelman 750,408
Electric light producing device, H. Viertel ... 750,414
Electric motor, T. W. Heermans ... 750,765
Electric time alarm, T. L. Bear ... 750,569
Electrical accumulator, Elieson & de Bobinsky, reissue ... 12,195
Electrical conductor, W. H. Wherry ... 750,309
Electrical distribution system, J. H. Hallberg ... 750,454
Electrical generation, distribution, and control system, Lyndon & Sperry ... 750,471
Electrical generation, distribution, and control system, E. A. Sperry ... 750,497, 750,500
Electrical generation, distribution, and control system, L. Lyndon ... 750,549, 750,550
Electrical vibrations, administering, F. H. Brown ... 750,584
Elevator brake, G. E. Carnes ... 750,597
End gate, wagon, E. A. Lampitt ... 750,376
Engine, De Laval & Aborn ... 750,377
Engine, A. Russell ... 750,705
Engine starting device, explosive, J. W. Swan ... 750,318
Engine vaporizer, gas, W. W. Grant ... 750,451
Engines, combined gas controller and igniter for explosive, S. Cunningham ... 750,349
Envelop, C. B. Denson ... 750,350
Evaporator, E. R. Goings ... 750,535
Expansion bolt, C. H. Haggerty ... 750,536
Eyeglasses, C. H. Pixley ... 750,392
Fan, electric, A. T. Smith ... 750,716
Fan, ventilating, O. Giltner ... 750,450
Feed regulator and low-water alarm, automatic water, A. M. Masters ... 750,293
Felly joint holder, W. J. Cranford ... 750.263
Fence post, S. O. Campbell ... 750,256
Fence wire stretcher, A. J. Chandler ... 750,750
Fertilizer and grain distributer, R. Y. Kessler ... 750,463
Fertilizer distributer, R. Love ... 750,381
Fertilizer distributer and seed drill, J. P. Stevens ... 750,726
Fibrous material, machine for compressing and reeling, M. L. Luebben ... 750,672
Fire escape, C. J. Haggstrom ... 750,640
Fire extinguisher, chemical, A. C. Badger ... 750,566
Fire extinguishers, sprinkler head for automatic, G. E. Hibbard ... 750,767, 750,768
Fire extinguishing device, J. H. Walrath ... 750,416
Firearm, revolving, W. J. Whiting ... 750,743
Flask for volatile or other liquids, H. Goetz 750,637

© 1904 SCIENTIFIC AMERICAN, INC.

WOOD or METAL Workers



Without Steam Power should use our Foot and Hand Power Machinery. Send for Catalogues
A—Wood-working Machinery,
B—Lathes, etc.
SENECA FALLS MFG. CO.
695 Water St., Seneca Falls, N.Y.

ENGINE & FOOT LATHES MACHINE SHOP OUTFITS. TOOLS & SUPPLIES CATALOGUE FREE. SEBASTIAN LATHE CO. 120 CULVERT ST. CINCINNATI, O.

A PERFECT BALANCE cannot be secured in belting unless the separate pieces are put together properly.

SCHIEREN BELTING RUNS STRAIGHT
because of our longitudinal lap construction. Of course the leather is of unusual excellence as we have explained in our new "Dixie Belt Leather Book." Want a copy?
CHAS. A SCHIEREN & CO.
NEW YORK: 52 Ferry St.
CHICAGO: 92 Franklin St.
BOSTON: 192 Lincoln St.
PITTSBURG: 243 Third Av.
PHILADELPHIA: 228 N. Third St.
DENVER: 1519 Sixteenth St.
HAMBURG: Pickhuben 4.

Veeder Counters
to register reciprocating movements or revolutions. Cut full size.
Booklet Free
VEEDER MFG. CO.
Hartford, Conn.
Cyclometers, Odometers, Tachometers, Counters and Fine Castings.



Price $1.00

WIRELESS TELEGRAPHY.—SCIENTIFIC AMERICAN SUPPLEMENT Nos. **1213, 1327, 1328** and **1329**, contain illustrated articles on this subject by G. Marconi. Additional illustrated articles by other authors are contained in SCIENTIFIC AMERICAN SUPPLEMENT Nos. **1124, 1131, 1177, 1192, 1217, 1218, 1219** and **1304**. These papers constitute a valuable treatise on wireless telegraphy. Price 10 cents each from this office, and all newsdealers.

STEEL ROLLS
for flattening wire for all purposes
Send for Catalogue.
BLAKE & JOHNSON,
P. O. Box 7, WATERBURY, CONN.





ORIGINAL BARNES
Positive Feed **Upright Drills**
10 to 50-inch Swing
Send for Drill Catalogue.
W. F. & JNO. BARNES CO.
(*Established* 1872)
1999 Ruby St., Rockford, Ill.
W.F. AND J.B.

TUBULAR DRIVING LAMP.



IT is the only perfect one.
IT will not blow or jar out.
IT gives a clear, white light.
IT is like an engine headlight.
IT throws the light straight ahead from 200 to 300 ft.
IT burns kerosene,
Send for book (free).
R. E. DIETZ CO., 60 Laight Street, New York.
Mention this paper and get special discount.
—ESTABLISHED 1840.—



THE CLIPPER CLIP
Its triangular shape prevents entangling and gives three times the capacity of any other Clip for attaching papers together.
Best & Cheapest. All Stationers.
CLIPPER MFG. CO.,
401 West 124th St., New York, U.S.A.
BRASS OR STEEL
For free samples and information write to us.

SETS OF CASTINGS OF MODEL ENGINES SEND 10¢ FOR 126 PAGE ILL. CATALOGUE. ALSO TOOLS, GEAR WHEELS & PARTS OF MODELS
GOODNOW & WIGHTMAN BOSTON
Removed to **182 Milk Street.**

WELL DRILLING Machines
Over 70 sizes and styles, for drilling either deep or shallow wells in any kind of soil or rock. Mounted on wheels or on sills. With engines or horse powers. Strong, simple and durable. Any mechanic can operate them easily. Send for catalog.
WILLIAMS BROS., Ithaca, N. Y.

MILLS FOR ALL MATERIALS.
OUR BUSINESS IS TO MAKE MACHINERY FOR GRINDING GRAIN, CRUSHING ROCKS AND PULVERIZING ALL HARD SUBSTANCES. WE HANDLE ALL KINDS OF MATERIALS FROM COTTON-SEED TO ROOTS AND HERBS, BY AN UNEXCELLED PROCESS. IF YOU WANT ANY KIND OF A MILL OR GRINDING MACHINE, COME TO US AND YOU WILL GET THE BEST AND STILL SAVE MONEY.



DEAL WITH US ONCE AND YOU WONT CHANGE.
ESTIMATES FREELY FURNISHED.
SPROUT, WALDRON & CO.
(SEND FOR CATALOG No 4.) MUNCY, PA.

Fluid elevator or pump, pneumatic, A. Montenegro y Van Halen	750,326
Fluid motor, J. F. Bentz	750,337
Flux, W. H. Wherry	750,512
Fowl carrier, G. F. Bush	750,252
Fruit feeder, I. H. Fay	750,628
Fuel economizing apparatus, G. H. Burpee	750,590
Fur beater, S. P. Shriber	750,714
Furnace, G. Garrett	750,635
Furnace, R. S. Franz	750,759
Furniture, self-leveling, G. W. & R. W. Bostwick	750,577, 750,578
Fuse for exploding shells, percussion, K. Wieser	750,785
Galley stand, J. C. Kling	750,464
Game board, W. E. Butler	750,346
Game, race, A. W. M. Keen	750,545
Garment suspender, combination, W. B. Tyler	750,325
Gas and oil engine, B. Musgrave	750,478
Gas generator, acetylene, L. Dietsch	750,618
Gas generator and burner, oil, R. Thayer	750,558
Gas light regulator, S. W. Hyatt	750,540
Gas purifier safety dumping door, E. F. Lloyd	750,470
Gear, belt driving, A. Bollee, Pere	750,576
Gear cutting machine, J. Parker	750,485
Glass drawing machine, G. H. Harvey	750,538
Glazed structure, J. A. Payne	750,389
Glove, F. W. Farrant	750,443
Glove, R. B. McMasters	750,683
Gopher-trap, J. Morawetz	750,677
Governor, engine, O. Hove	750,649
Grain drill attachment, double disk, J. A. Bingham	750,339
Grain huller, A. B. Couch	750,610
Grinding apparatus, roll, Ford & Allen, 750,528 to	750,531
Grinding machine, D. Kennedy	750,372
Grinding mill, A. J. Robinson	750,701
Hair pin, A. Bowers	750,579
Hame, W. H. Carr	750,598
Hammer, power, A. Groenig	750,359
Harrow, H. J. Metz	750,473
Harrow tooth, J. Schweinfurth	750,495
Harvester, corn, W. R. Page	750,687
Harvester twine holder and tension device, F. A. Bicket	750,574
Hat holder, M. N. Gable	750,634
Heat alarm, H. F. Jones	750,543
Heating and sterilizing apparatus, J. S. Forbes	750,757
Heating system, F. C. Goff	750,358
Hoe, E. Weber	750,418
Hog tamer, A. C. Decker	750,437
Hoisting machine brake, Hoover & Mason	750,283
Horseshoe calk, C. L. Dahly	750,614
Hose pipe fastener, F. Bissing	750,340
Hose-supporter, E. N. Humphrey	750,652
Household implement, R. Gibbons	750,357
Hydrant, W. Volkhardt	750,415
Incubator, T. P. Adams	750,333
Index and advertising device, C. F. West	750,507
Insect exterminator, J. Schiller	750,708
Isulator, L. Steinberger	750,722
Iron or steel, electrometallurgy of, H. Harmet	750,561
Jack, R. H. Welles	750,740
Jar holder, fruit, K. A. Johnson	750,654
Joint coupling, A. P. Brockway	750,343
Journal bearing, R. Harding	750,279
Kiln, H. M. Buck	750,588
Kitchen fork, J. Proskauer	750,697
Lace fastener, shoe, G. C. Ferguson	750,526
Lacing hook mold, P. Clifford	750,662
Lacing stud or eyelet, J. L. Poalk	750,691
Ladder, extension, C. G. Tiefel	750,504
Ladder, truck, T. U. Sechler	750,402
Lamp ballast device, vapor, H. N. Potter	750,554
Lamp burner, W. S. Hamm	750,455
Lamp burner, Mosher & Legge	750,476
Lamp, incandescent, W. A. Springall	750,720
Lamp, incandescent vapor, L. Denayrouze	750,438
Lamp, incandescent vapor, W. Tures	750,784
Latch, J. A. Craig	750,435
Leach clearing mechanism, C. P. Bossert	750,427
Lead, manufacture of white, J. W. H. James	750,541
Leather, production of substances resembling, Karle & Schmidt	750,371
Leather splitting machine, Seymour & Harris	750,403
Ledger binder, loose leaf, L. M. Leslie	750,664
Lifting apparatus, J. A. Taylor	750,320
Lifting jack, L. C. Kimberly	750,287
Lifting mechanism, T. L. F. Stack	750,409
Light. See Street light.	
Loading device, A. E. Merkel	750,382
Lock, C. E. Johnson	750,285
Lock and latch, combined, B. Schacht	750,707
Locomotive buffer beam, J. F. Dunn	750,441
Log car standard, Klingensmith & Lane	750,659
Loom warp stop motion, W. Oldfield	750,300
Looms, filling end holding means for automatic, M. L. Stone	750,411
Lubricator, L. Chapman	750,751
Lumber or lath handling apparatus, W. A. Marshall	750,775
Magnet, H. F. Campbell	750,594
Mail bag catcher, A. P. Bower	750,341
Mail box, rural, C. F. Keller	750,547
Mailing or similar box indicator, J. Booth	750,519
Massage implement, J. Barker	750,568
Match or other box, A. F. Fuller	750,447
Melting furnace, J. F. Barker	750,748
Mercerizing apparatus, T. Pratt	750,694
Metal, etc., coin controlled device for embossing strips of, Casler & Pross	750,432
Metal working machine traveling carrier, S. B. Harding	750,644
Metals, uniting two, W. H. Wherry	750,511
Microscopist's paraffine bath, F. A. Wunderlich	750,515
Milk can, Keiner & Gilman	750,461
Milk pail holder, F. L. Shattuck	750,312
Molder's flask and gated pattern, H. G. Voight	750,559
Molding apparatus vibrator, F. W. Hall	750,641
Molding machine, C. D. Marsh	750,552
Molten baths, drawing articles from, C. P. Byrnes	750,253
Monorailway and truck therefor, L. Beecher	750,247
Mop wringer, Fowler & Wetzler	750,354
Motive power, generating, A. Schutt	750,493
Motive power, generation of, A. Schutt	750,494
Mower, motor lawn, I. H. Davis	750,616
Music turner, sheet, M. T. Phillips	750,391
Nail or tack driving implement, S. A. Cohen	750,605
Nest, trap, A. G. Root	750,702
Nut for safety bolts, air valve caps, etc., E. Michelin	750,675
Nut lock, F. A. Howard	750,364
Nut lock, T. G. Ingle	750,365
Nut lock, H. C. Stouffer	750,412
Nut lock, F. P. Koenig	750,466
Nut lock, spindle, S. C. Baughn, Jr.	750,425
Nut or pipe wrench, D. Stewart	750,727
Optical device, M. F. Shea	750,711
Ore concentrator, T. H. Hicks	750,281
Ore concentrator, E. M. Jahraus	750,367
Ore separator, pneumatic dry, E. M. Jahraus	750,366
Package record retainer, liquid, T. Pendergast	750,390
Packing device for rotary motor stuffing boxes, adjustable, S. George	750,534
Packing, shaft, G. E. Hibbard	750,766
Pail, telescopic measuring, C. Fisher	750,632
Painting machine, G. Russell	750,307
Paper bags, apparatus for feeding self-opening square, W. Pippert	750,302
Paper feeding machine, C. B. Maxson	750,295
Paper feeding machine, E. J. Hallberg	750,453
Paper feeding mechanism, W. A. Tarbett	750,313
Paper or the like with adhesives, apparatus for coating, F. Maginn	750,291
Paste receptacle, A. N. Ritz	750,304
Pastry molding machine, V. Cote	750,609
Pen, fountain, A. Eberstein	750,271
Pen, fountain, F. C. Brown	750,430
Pen, fountain, F. M. Kegrize	750,546
Pen, fountain, F. C. Brown	750,583
Petroleum engine, B. H. Pomeroy	750,489
Photographic plate treating apparatus, G. H. Dorr	750,621
Piano players, adjusting device for cases of automatic, F. V. Crofut	750,612
Piano sounding board, W. J. Brashears	750,248
Pianos, device for automatically playing, O. H. Arno	750,517

Pin. See Hair pin.

WILLIAMS' SHAVING SOAP

No Smarting Faces
Face ever smart when going into a cold wind after shaving? If so you are **not** using **Williams' Shaving Soap,** which always leaves the face soft and comfortable, and prevents chapping and irritation.
Sold in the form of Shaving Sticks, Shaving Tablets and Shaving Cream throughout the world
THE J. B. WILLIAMS CO., Glastonbury, Conn., U. S. A.

CYPHERS INCUBATORS



Guaranteed to hatch more and healthier chicks than any other make, or your money back. Use less oil; self-regulating, self-ventilating, non-moisture. Endorsed and adopted by 36 Government Experiment Stations. Catalog free if you name this paper.
Cyphers Incubator Co. Buffalo, N. Y.
Chicago, New York or Boston.



BUILD YOUR OWN INCUBATOR
Any man or boy can do this easily with common tools and **Save More Than Half.** How? Get our Complete Book of Plans for building NEW IDEA INCUBATORS AND BROODERS. We will then sell you at cost all fixtures like Tank, Lamp, Regulators, Trays, Legs, etc. Big money in building and selling incubators. No Experiment. Send for "How to Make and Save Money with Incubators," our new handsome Poultry Book and Catalogue. It is FREE.
CHANNON, SNOW & CO.
DEPT. 156 QUINCY, ILL.

NO LOOP-HOLES
in our guarantee, for it makes every body safe—"Money back, if the **Reliable Incubator** doesn't give satisfactory hatches after a fair test." Ask about it and get our 20th annual catalogue free. Just send 10c. to pay postage.
Reliable Incubator and Brooder Co., Box B-105, Quincy, Ill.

A FOLDING CAMERA.—WORKING Drawings showing how to build a folding camera. A practical paper by an amateur for amateurs. 4 illustrations. Contained in SUPPLEMENT **1021.** Price 10 cents. For Sale by Munn & Co. and all newsdealers.

B. F. BARNES ELEVEN-INCH SCREW CUTTING LATHE



For foot or power as wanted. Has power cross feed and compound rest. A strictly high grade, modern tool. Ask us for printed matter.
B. F. BARNES COMPANY,
Rockford, Ill

FERRY'S SEEDS
Deserve your confidence. They have never failed—won't fail now. Sold by all dealers.
1904 Seed Annual postpaid, **free.**
D. M. FERRY & CO.
Detroit, Mich.

ARMSTRONG'S No. 0 THREADING MACHINE



Can be attached to bench or post. Designed for threading the smaller sizes of pipe, iron or brass, also bolts. Has two speeds, one for pipe ⅛ to 1 inch; the other for pipe 1¼ to 2 inches, inclusive. Uses the regular Armstrong adjustable dies. Other attractive features. Send for particulars. **The Armstrong Mfg. Co.,** 139 Centre Street, New York. Bridgeport, Conn.

INDUCTION COILS for experiments in X rays and other electrical work.
Catalogue Free.
E. S. RITCHIE & SONS BROOKLINE, MASS

For Present Time For Future Time For All Time ELGIN TIME
Every Elgin Watch is fully guaranteed. All jewelers have Elgin Watches. "Timemakers and Timekeepers," an illustrated history of the watch, sent free upon request to
ELGIN NATIONAL WATCH CO., ELGIN, ILL.

A GOOD INVESTMENT
For **$1.75** we will send by express (not prepaid), complete N. D. Outfit with full instructions for learning **TELEGRAPH OPERATING.** A fascinating study that will enable you to earn good wages. Send 25 cents for universal dating stamp, by mail, postpaid. Send for our catalog. *Established* 1879.
J. H. BUNNELL & CO., Inc. 20 Park Place New York

Screw Cutting Back Geared 9x25 Lathes $35
and up, to suit your need either as to size or price. Write us, we will interest you.
The Carroll-Jamieson Machine Tool Co.
BATAVIA, OHIO, U. S. A.



BURNS AIR NOT MONEY.

One 'BEST' Light
Gives more Light than Six Electric Lights, or Ten Kerosene Lamps or One Hundred Candles, and Costs less than Kerosene.
Burns 90% Air 10% Gas
Air is free. The Lamp makes all the gas needed.
A beautiful, pure white, steady, safe light. No Wick! No Grease! No Smoke! No Odor! Hang or Set it anywhere. Over 100 Styles.
AGENTS WANTED
THE BEST LIGHT CO.,
87 E. 5th St., Canton, Ohio.

Home Mechanics for Amateurs
By GEORGE M. HOPKINS
Author of "Experimental Science"
370 Pages 326 Engravings Price $1.50



THIS important work has achieved great popularity. It tells how to do things. The New York Tribune says: "The book may be commended for its practicability and suggestiveness and will be found to appeal to boy readers almost as much as to older amateur mechanics."

CONTENTS:
Woodworking
How to Make Household Ornaments
Metal Working
Model Engines and Boilers
Meteorology
Telescopes and Microscopes
Electricity
Each subject is adequately treated.
Send for free descriptive circular.
MUNN & CO., Publishers
361 Broadway New York City

JEFFREY ELEVATING--CONVEYING--POWER
Transmission--Screening--Dredging--Coal Cutting
Drilling--Hauling--Washing Machinery.
For Catalogues address THE JEFFREY MFG. CO.
COLUMBUS, OHIO, U. S. A.
NEW YORK DENVER

© 1904 SCIENTIFIC AMERICAN, INC.

Send No Money

You can obtain this stylish **$12 Tailor-Made All Wool Suit guaranteed to fit, for**

ONLY $7.95

providing you will hand an envelope containing Samples, Catalogue and Special Offer to ten men who in your judgment would be likely to take advantage of our Tailor Made Suit offer. Sent C. O. D. without paying one cent in advance.

We can afford to sell you this ONE $12.00 suit for $7.95 in order to introduce our Tailor Made Clothing in your vicinity; for the reason that these suits are made of such fine material, cut and tailored in such first-class style, that the ONE suit we send you will be the means of our selling a great many more to the ten persons you hand the ten sets of samples and advertising matter to, and to their friends.

You do not run the slightest risk; we fill your order exactly as given and send the suit to your express office for you to examine and try on. IF you find it a perfect fit and as good a $12.00 Suit as you ever saw, pay the express agent $7.95 and express charges. If not satisfactory, it will be returned at our expense. We know that you will be pleased, or we could not afford to make a suit to your measure and ship it to you without a deposit.

Write to-day for Free Samples, Catalogue, instructions for taking measurements, and **$7.95 Special Offer.**

We refer you to the Milwaukee Ave. State Bank of Chicago, capital stock $250,000 00.

O. T. MOSES & CO.
191 W. Chicago Avenue, Chicago.



HEALTH'S SAFEGUARD

Put the Hygienic Guard on your telephone transmitter. It does not affect the efficiency of the conversation, yet it insures protection against odors and bacteria in the mouth piece of the transmitter. This device has received the endorsement of every Board of Health to which it has been submitted. Hundreds of them are now in use in the industrial and mercantile marts throughout the country. **$1.00,** postpaid to any address, complete, with full instructions.

The Lawrence-Hall Electric Co.
CINCINNATI, OHIO

THE STEAM TURBINE; THE STEAM Engine of Maximum Simplicity and of Highest Thermal Efficiency. By Prof. R. H. Thurston. A valuable series of articles having cuts of some of the more efficient engines of this type—the Parsons', De Laval, Dow, etc.; with exhaustive tables giving the result of tests and much general data on the subject. Contained in SUPPLEMENT Nos. **1305, 1307** and **1308.** Price 10 cents each. For sale by Munn & Co. and all newsdealers

NON-SMUT CARBON PAPER

Send Us One Dollar

and we will send you 12 sheets of our famous Non-Smut Carbon Paper (regular price 50c.) and one of our Standard Dollar Ribbons—**$1.50 in value for $1.00.** Non-Smut Carbon Paper is made of **gelatinized ink,** therefore will not smut copy or fingers. It lasts longer, manifolds clearer, and makes more copies than any other paper made Non-Smut Ribbons wear longer, print better, don't fill the type and are cleaner. Sold by up-to-date dealers. Money back if wanted. Write for samples **FREE** and illustrated book, "Stella the Stenographer," sent on request.

Non-Smut Carbon & Ribbon Co., Makers of Carbon Paper and Ribbons of all kinds, **114 Main St., Rochester, N. Y.**

"A Message to Garcia"

is not "in it" as a business stimulator with our famous little decorated tin reminders, called **DO IT NOW**

We sell them at cost (10 cents) and pay postage because our advertisement is on the back.

AMERICAN STOPPER CO.
136 Water Street, - - Brooklyn, N. Y.
Largest Makers of Tin Boxes Outside the Trust.

STIMULATION without IRRITATION

Means New Life to the Scalp.

The Evans Vacuum Cap gives the scalp a thorough massage and encourages a free and healthful circulation without rubbing and without the use of drugs or irritants. It will stop hair from falling out and restore a normal growth where live follicles exist. The Cap is used about ten minutes twice a day and its effects are pleasant from the very beginning. We will refund your money in full if results are not satisfactory after a thirty days' use. Call on or address

EVANS VACUUM CAP CO.
ST. LOUIS OFFICE, Fullerton Building.
NEW YORK OFFICE, 1300 Broadway.

NOTE:—To those who find it convenient to call at our offices we will give a sufficient number of demonstrations free to satisfy them as to the merit of this appliance.

AN ENGINEER'S LIBRARY.

An absolute Encyclopædia for Engineers or for Steam Users, Electricians, Firemen and Machinists, is the

HANDBOOK ON ENGINEERING.

By HENRY C. TULLEY.

Third edition, enlarged and revised, 5,000 copies, now ready. Sent anywhere on receipt of price, $3.50—money back if dissatisfied. 900 pages. 400 fine illustrations. Thoroughly reliable and practical. Handsomely bound in leather and gilt. Pocket-book form.

H. C. TULLEY & CO.,
1060 Wainwright Bldg., St. Louis, Mo., U. S. A.

Send For It To-Day

You'll find it always convenient to have as a useful and instructive book

Montgomery & Co.'s Tool Catalogue

The new edition has 704 pages and is copiously illustrated. Pocket size 6¼x4½ ins. Sent by mail for 25c.

MONTGOMERY & CO.,
105 Fulton St., New York City.

Pipe coupling, P. E. Fisher	750,444
Pipe lining machine, J. T. Langford	750,660
Pipe or nut wrench, M. N. Sawyer	750,308
Pipe or spout holder, J. V. Abronski	750,516
Planter, automatic check row corn, E. O. Storrs	750,729
Plow, J. Naidul	750,385
Plow attachment, Burkett & Davenport	750,251
Pneumatic seat, C. L. Berger	750,571
Pneumatic tired wheel, T. Lindenberg	750,379
Pole, wagon, F. G. Winnek	750,745
Portable drill, J. F. Willey	750,744
Potato digger, H. Kniphals	750,375
Power transmitting mechanism, E. A. Sperry 750,498,	750,499
Preserving perishable substances, apparatus for, C. Blagburn	750,518
Primer, J. M. Edmunds	750,624
Printing and ruling machine ringed roller, line, G. F. McAdams	750,680
Printing machine, W. Scott	750,401
Printing machine, line, G. F. McAdams	750,681
Printing machine, warp, Winslow & Dennett	750,514
Printing plate holder, C. F. Rockstroh	750,395
Printing press form inking rollers, roller wheel for, S. H. Shaw	750,710
Printing press, multicolor, C. M. Shigley	750,405
Printing warps, Winslow & Dennett	750,513
Projectile, K. Wieser	750,328
Propelling mechanism, D. L. Graham	750,638
Propulsion apparatus for vessels, jet, S. George	750,533
Propulsion gearing, W. B. Bard	750,424
Pulleys, sectional hub for, E. S. Hamilton	750,277
Pump, C. J. Allen	750,560
Pump barrel clamp, W. J. Bussinger	750,591
Pump governors, pressure regulator for steam, J. W. Gardner	750,448
Punch, pliers, etc., W. M. Morton	750,678
Punching machine, O. P. Woodburn	750,746
Radiator connection, J. S. Brennan	750,582
Rail bond terminals, mold for casting, W. H. Wherry	750,508
Rail bonds directly in place on the rails, forming electrical, W. H. Wherry	750,510
Rail bonding apparatus, W. B. Cleveland	750,522
Rail joint, G. F. C. Powell	750,693
Rail joint, S. S. Moore	750,778
Railway cattle guard, A. R. Dawson	750,524
Railway crossing warning signal, J. Crumley	750,264
Railway, pleasure, L. Beecher	750,246
Railway rail and rail joint chair, R. Urbanitzky	750,736
Railway rail fastener, R. D. Burchill	750,345
Railway rail joint, C. L. Pope	750,490
Railway service safety device, E. B. Powers	750,781
Railway signal, electric, W. V. Moak	750,296
Railway switch, F. Bayless	750,334
Railway trains, apparatus for automatically stopping, H. G. Sedgwick	750,310
Rake, M. Y. Warren	750,737
Register. See Cash register.	
Ringer, A. M. Knudsen	750,288
Road making machine, I. Ogden	750,482
Rope tie, L. F. Ramsey	750,782
Rubber dam holder, A. J. Price	750,695
Rudder, T. P. Byram	750,592
Safety guard, G. O. Curtis	750,265
Sample sheet, J. Dohse	750,620
Sash fastener, J. Anderson	750,420
Sash holder, W. Lemke	750,469
Saw handle, crosscut, W. MacLennan	750,773
Saw table, bracket, J. C. Mallonee	750,551
Scale, depth, W. J. Gillard	750,449
Scraper, dipper, L. H. Johnson	750,459
Sewing machine needle vibrating mechanism, J. T. Hogan	750,648
Shaft hanger, C. W. Levalley	750,636
Sahft, vehicle, E. Packer	750,685
Shafting couplings, apparatus for applying and removing, W. J. Muncaster	750,477
Sharpening machine, razor, A. W. Scheuber	750,399
Sharpening razors, rotary wheel for, C. Philius	750,301
Sheave, ball bearing, H. F. Keil	750,771
Sheet metal articles, machine for forming, H. L. Bradley	750,581
Shelf clamp, glass, W. H. Campbell	750,595
Shelves, label holder for library, L. C. De Carli	750,436
Shoe polisher, M. A. Heimann	750,280
Shoe upper fly closer, S. Cloutier	750,603
Shovel, G. Thompson	750,413
Signals over surfaces, wireless electric transmission of, F. Braun	750,429
Signaling apparatus, electric, W. E. Decrow ..... 750,268 to	750,270
Signaling apparatus, selective, Moodie & Small	750,777
Silk, making artificial, E. Thiele	750,502
Skate, N. G. Johnson	750,542
Skate sharpener, C. W. Price	750,096
Skid, J. P. Frank	750,446
Sled draft mechanism, traction, N. E. Brown	750,586
Smoke consuming furnace, J. A. Willard	750,786
Smoke purifier, J. F. Doyle	750,351
Sound recording and reproducing machine, H. Jones	750,460
Spark arrester, J. D. King	750,658
Spiral motor, steam and hydraulic, S. George	750,532
Splint carrier, F. C. Dininny, Jr	750,754
Spring motor, W. Weiner	750,327
Square, G. A. Stephens	750,725
Stacker hood, pneumatic, I. A. Weaver	750,738
Steam boiler, E. U. Gibbs	750,275
Steam boiler, J. C. Stead	750,721
Steamer, clothes, J. A. Owens	750,483
Still, water, G. A. & C. A. Young	750,747
Stove, A. B. Fox	750,355
Stove, portable camp, W. Weston	750,742
Streams, means for controlling flowing, E. S. Cole	750,752
Street light, D. J. Prendergast, et al	750,555
Stropping machine, A. W. Scheuber, 750,397,	750,398
Stud and pin coupling, A. B. Tarbox	750,501
Surgical instrument case, F. A. Koch	750,465
Suspenders, H. G. Macwilliam	750,774
Swinging gate, E. & W. B. Browning	750,587
Syringe, vaginal, F. J. Gruss	750,276
Tank mold, M. Lee	750,468
Telegraph instrument stand, J. W. Leech	750,289
Telegraphy, spark, Slaby & Arco	750,496
Telephone service apparatus, U. S. Jackson, 750,769,	750,770
Telephone switchboard plug, F. D. Pearne	750,689
Telephone switching and signaling apparatus, M. C. Rorty	750,704
Tie. See Rope tie.	
Tile, C. N. Allerding	750,561
Tile for floor or wall coverings, interlocking, A. W. Nilsson	750,779
Tire, multiple tube pneumatic, H. G. Fiske	750,633
Tire protective band, pneumatic, H. Brookes	750,249
Tire protector, vehicle, F. B. Hayden	750,647
Toe swage, D. C. Joy	750,369
Toilet stand, J. C. Dowd	750,439
Tool, combination, J. Jenkins	750,284
Tool turret mechanism, B. M. W. Hanson	750,278
Top, movable, S. Cloutier	750,604
Torpedo placer, railway, Shimp & Griffin	750,713
Tower, rotary pleasure, W. R. Snyder	750,717
Toy, J. C. Wells	750,506
Trace hook, B. T. Kinnear	750,373
Track leveler, J. Finn	750,353
Transformer, A. R. Everest	750,525
Trolley attachment, overhead, C. Holyland, Sr.	750,458
Trolley for electric railway cars, C. J. Johnson	750,368
Trolley pipe, J. J. Tartt	750,733
Truck and hoist, barrel, E. B. Little	750,671
Truck bolster and bearing therefor, car, E. Cliff	750,348
Truck bolster, railway car, C. F. Street	750,731
Trunk fastener, B. Weber	750,739
Turbine, steam or gas, J. Stumpf	750,316
Typewriter, A. Beyerlen	750,573
Typewriting machine, C. Gabrielson	750,274
Typewriting machine, C. H. Shepard	750,712
Typewriting machine keyboard, A. Beyerlen	750,572
Typewriting machine tabulating device, A. P. Beyerlen	750,338
Umbrella, E. T. Miller	750,553

AUTOMOBILES For 1904

include the new **Mark Lx Electric Runabout** the fastest and handsomest auto in its class, as well as the lightest of equal battery power. **Price, $850.** Also our new **12 h. p. Light Gasoline Tonneau,** with double opposed cylinder engine in forward bonnet and improved automatic features of control. **Price, $1,700.**

Catalogue of all Columbias on request.

Special booklet of Electric Town Carriages.

ELECTRIC VEHICLE CO
Hartford, Conn.

Member Association of Licensed Automobile Mfrs.

New York Salesrooms:
134 to 138 W. 39th St.,
Opp. Metropolitan Opera House.

Boston:
74, 76, 78 Stanhope St.

Chicago:
1413 Michigan Ave.



KENT POCKET METERS

Automatic Volt-Ammeter

Is designed and calibrated especially for testing batteries on gasoline automobiles and launches and for any other use of like capacity. Accurate and substantial. Ampere reading made simply by pressing button. The most convenient and complete battery tester on the market.

Volt-Ammeter **$6.00.** Amperemeter **$5.00.**

Atwater Kent Mfg. Works, 110 N. 6th St., Philadelphia, Pa

WITTE GAS ENGINES

The highest type of Gas Engines now sold on **30 Days' Free Trial.** Very sensitive governor; perfect electric igniter. Write for Catalogue E.



WITTE IRON WORKS CO.,
517 W. 5th St., Kansas City,
or Witte Gas & Gasoline Engine Co., 48 S. Canal St., Chicago.

SPLITDORF SPARK COILS

25 VANDEWATER ST. N.Y.

THE MIETZ & WEISS KEROSENE and GAS ENGINE



Sizes from 1 to 60 H. P.

Send for Catalogue.

burns **KEROSENE** cheaper and safer than gasoline. Automatic, simple, reliable. **No** electric battery or flame used. Perfect regulation. Belted or directly coupled to dynamo for electric lighting, charging storage batteries, pumping **and all power purposes.**

A. MIETZ.
128-138 Mott St., NEW YORK.

ADOPTED BY U. S. GOVERNMENT.

Highest Award, direct coupled Generator Set. Paris Exposition, 1900.

Gold Medal, Pan American Exposition, 1901. **Gold Medal,** Charleston, S. C., Exposition, 1902.

Better Light—Less Cost

A much stronger, whiter, steadier light is secured for house or store, church, school, office, etc., by a



"CARTER" ACETYLENE GAS GENERATOR

than by ordinary gas. Cheaper, safer, cleaner, simpler. Takes up little cellar room. Requires little attention. Saves a lot of money, work and worry.

NIAGARA FALLS ACETYLENE GAS MACHINE CO., Niagara Falls, N. Y.

SENSITIVE LABORATORY BALANCE. By N. Monroe Hopkins. This "built-up" laboratory balance will weigh up to one pound and will turn with a quarter of a postage stamp. The balance can be made by any amateur skilled in the use of tools, and it will work as well as a $125 balance. The article is accompanied by detailed working drawings showing various stages of the work. This article is contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **1184.** Price 10 cents For sale by MUNN & Co., 361 Broadway, New York City, or any bookseller or newsdealer.



A Constant Water Supply

Without Cost of Maintenance

is best afforded by the use of a

NIAGARA HYDRAULIC RAM

The Niagara is a new improvement upon the old-fashioned ram, and delivers from 2 to 5 times as much water under the same condition. Our rams have been used in almost every state in the Union, and have proved the superior of all others. Write for catalog and testimonials.

Niagara Hydraulic Engine Co., Chester, Pa.

"Economy in the Boiler Room"

is a little booklet that tells how to save hundreds of dollars every year. It also tells of the **Dean Boiler Tube Cleaner,**

the only device made which will remove all scale from your boiler tubes.

WM. B. PIERCE CO,
320 Washington Street, Buffalo, N. Y.

NO GUESSING ABOUT IT.



You put my Calipers over your work and you know **in an instant** just what size it is and **how much too small or too large.**

Send for Catalogue and Special Discount to

ERNST G. SMITH, COLUMBIA, PA.

MIND the MICROBES!



You get them in all ordinary drinking water Before drinking, purify it. You can transform it into pure water in the surest and quickest way by using the well-known

Berkefeld Filter

which is so constructed as to eliminate from the water all foreign bodies. One gallon of pure water in 4 minutes. Easy to clean, easy to care for.

BERKEFELD FILTER CO., 4 Cedar Street, New York

SIGNALING THROUGH SPACE without wires.—An article by W. Preece, describing the new Marconi system of telegraphing without wires. 6 illustrations SCIENTIFIC AMERICAN SUPPLEMENT **1124.** Price 10 cents. For sale by Munn & Co. and all newsdealers

STEVENS

By consulting the pages of a **STEVENS** catalog, we feel assured that you will find firearms described, eminently suitable to your requirements. We manufacture an extensive variety of

RIFLES, PISTOLS and SHOTGUNS

for young and old of either sex, all **GUARANTEED** for **QUALITY.**

All dealers handle the

STEVENS

Send for illustrated catalog.

Have you tried that new Puzzle of ours? Send for this attractive and interesting novelty, which will be mailed to any address upon receipt of two 2-cent stamps.

J. STEVENS ARMS & TOOL CO.
925 Main Street
Chicopee Falls, Mass.

THE DRAFTSMAN

is devoted to the interest of draftsmen of every class and of special value to students in engineering and drawing

A MONTHLY PAPER

10 cents a Copy $1.00 per Year

107 The Beckman Building
CLEVELAND ⌀ OHIO

50 Years' Experience

PATENTS

Trade Marks, Designs, Copyrights, Etc.

Anyone sending a sketch and description may quickly ascertain our opinion free whether an invention is probably patentable. Communications strictly confidential. Handbook on Patents sent free. Oldest agency for securing patents.

Patents taken through MUNN & Co. receive *Special Notice*, without charge, in the

Scientific American

A handsomely illustrated weekly. Largest circulation of any scientific journal. Terms, $3 a year; four months, $1. Sold by all newsdealers.

MUNN & CO. 361 Broadway, **NEW YORK**
Branch Office 625 F St. Washington, D. C.

© 1904 SCIENTIFIC AMERICAN, INC.

Jump over the Counter

Don't spend all your life in a poorly paid clerkship. We train ambitious men or women, in spare time, for positions that pay well. Start to-day to rise. **I.C.S. Textbooks** make it easy for those already at work to

LEARN BY MAIL

Mechanical, Electrical and Civil Engineering; Mechanical Drawing; Architecture; Chemistry; Ornamental Design; Book-keeping; Stenography; Teaching; English Branches; German; Spanish; French. 70 Courses. Circular free. When writing state subject that interests you. **International Correspondence Schools, Box 942, Scranton, Pa.**

ELECTRICAL ENGINEERING TAUGHT BY MAIL.

Write for our Free Illustrated Book.

"CAN I BECOME AN ELECTRICAL ENGINEER?"

We teach Electrical Engineering, Electric Lighting, Electric Railways, Mechanical Engineering, Steam Engineering, Mechanical Drawing, at your home by mail. Institute indorsed by Thos. A. Edison and others.

ELECTRICAL ENGINEER INSTITUTE, 240-242 W. 23d St. New York.

Dept. A,

What Is Daus' Tip-Top?

TO PROVE that Daus' "Tip-Top" is the best and simplest device for making **100 copies** from pen-written and **50 copies** from typewritten original, we will ship complete duplicator, cap size, **without deposit,** on **ten (10) days' trial.**

Price $7.50 less trade discount of 33⅓ per cent, or $5 Net

The Felix F. Daus Duplicator Co., Daus Bldg, 111 John St., New York

READY MARCH 15.

Spangenberg's Steam and Electrical Engineering

By F. SPANGENBERG, M. E.
former Superintendent of the St. Louis School of Engineering.

Containing 1,035 Questions and Answers, with 648 Illustrations. Price, **$3.50.**

The best book on the subject ever published.

GEO. A. ZELLER, Publisher, Estab. 1870
68 S. Fourth St. St. Louis, Mo.

Now Ready ***Bound Volume***

OF THE

SCIENTIFIC AMERICAN BUILDING MONTHLY

VOLUME No. 36

July to December, 1903

A Monthly Magazine of Domestic Architecture Sumptuously Illustrated

272 Illustrations 6 Covers in Tint
132 Pages

Price of Semi-Annual Volume $2.00 by mail

SPECIAL FEATURES

The Garden at Georgian Court:
Mr. George J. Gould's residence at Lakewood, N. J.

Harbor Hill:
The Clarence H. Mackay Estate at Roslyn, L. I.

Mr. Karl Bitter on the Sculpture for the St. Louis Exposition.

"The Orchard":
The Country Seat of Mr. James Lawrence Breese, at Southampton, L. I.

Mr. W. L. Stow's House at Roslyn, N. Y.

Mr. Charles H. Israels on the Apartment Hotel.

"Monthly Comment." Aims to help its readers to better building. The illustrations reproduce homes and other structures of the highest grade and of varying costs. It seeks to interest the architect, the house owner, the real estate promoter, the home maker, and the builder. It stands for the good and the true and the beautiful in art. Its "Talks with Architects" bring its readers in immediate touch with the leading architects of the day. Its descriptions of houses are brief but compact with information. Its departments constitute a "review of reviews" summary of current comment, suggestion and help in all matters relating to the construction of the home, its decoration, equipment, and use.

Editorial Articles: "Women and Architecture," "Fake Houses," "The Family and the House," "The Style of the House," "Building the House," "Originality in Design."

Departments: "The Household," "The Garden," "The Summer House," "Wall Papers," "Legal Notes," "The Houseboat," "Plumbing," "New Building Patents," "Lights and Lighting," "The Kitchen," "Furnishings," "Fire Protection," "Sanitation," "The Camp," "The Yacht," "The Flat," "Furniture," "New Books," "The Floor," "Stable Lore," "Decoration," "Heating Talk," "The Nursery," Publishers' Department.

SCIENTIFIC AMERICAN BUILDING MONTHLY contains, each month, fourteen large pages of original photographs and plans of dwellings, houses, gardens, country estates, and buildings of moderate price, together with a cover beautifully printed in tint. The illustrations are all made from photographs taken expressly for the Magazine and are printed with every advantage of the printer's art. The plans which accompany most of the illustrations present a complete synopsis of each subject and are a unique feature of this valuable Magazine. Careful and concise descriptions accompany each illustration. The illustrations include photographs of exteriors, interiors, and details, views of gardens and ornamental adjuncts to the house. No expense is spared to make this Magazine the leading periodical of its class and of the utmost practical value to its readers.

Price of semi-annual bound volume, $2.00, mailed.

We also supply a bound volume containing all the numbers for 1903; price, $3.50, by mail.

FOR SALE BY

MUNN & CO.

361 Broadway New York City

AND ALL NEWSDEALERS

Umbrella, A. Fieldhouse	750,631
Upholstering device, H. B. Fitner	750,690
Vacuum frame, Lewellyn & Schock	750,667
Valve, W. H. Thompson	750,321
Valve, flushing, R. F. Gillin	750,763
Valve gear, explosive engine, R. E. Olds	750,684
Valve, steam actuated, R. D. Ackley	750,331
Valve, steam actuated, E. W. Penfold	750,486
Valve, steam engine piston, W. Schmidt	750,400
Vapor burner, F. E. & F. O. Stanley	750,410
Vapor engine, B. H. Pomeroy	750,488
Varnish substitutes, manufacturing, R. Blume	750,575
Vehicle alarm, road, Goculdas & Irani	750,636
Vehicle body, R. F. Monroe	750,298
Vehicle brake, W. H. Cooley	750,261
Vehicle brake, A. M. Ledbetter	750,378
Vehicle, convertible, H. Romunder	750,396
Vehicle testing device, self-propelled, A. P. Brush	750,749
Vehicle top valance, C. S. Applas	750,564
Vending machine, J. J. Sleeper	750,315
Vending machine, C. V. Wertz	750,741
Vessel with charging or discharging means, rotary, A. Wunsch	750,330
Vibratory drier, M. E. Cooley	750,262
Vibratory treatment, implement for mechanical, F. B. Turck	750,735
Wagon, dumping, D. S. Everett	750,442
Washing machine, E. V. Allen	750,419
Watch holder, G. R. H. Thorn	750,503
Watch winding and setting mechanism, A. Ditesheim	750,619
Water gage, N. H. Hiller	750,539
Water purification, C. Monjeau	750,474
Water tube boiler, T. W. Johnson	750,286
Water wheel setting, A. Giesler	750,761
Weather strip, S. Lenzner	750,663
Weighing machine, can, W. H. Coffelt	750,259
Well working barrel, W. W. Sleeman	750,715
Wells, fishing tool for oil or like, C. A. Sargert	750,491
Wind wheel, A. M. Cox	750,611
Window screen, C. D. Cutts	750,266
Wire, covering, J. C. Anderson	750,563
Wire stretcher, D. M. Fry	750,273
Wire stretcher, I. M. Warner	750,417
Wire working tool, B. B. Feltus	750,630
Wood scraping and smoothing machine, N. J. Matthiesen	750,294
Wrench, M. M. Le May	750,772
Yoke, neck, Engeljohn & Weale	750,626

DESIGNS.

Badge, P. H. Englewood	36,758
Bank, money, Weir & Perry	36,749
Brooch, button, or buckle plate, or similar article, S. A. Keller	36,757
Brushes, mirrors, or similar articles, back for, H. J. Straker	36,760
Cabinet, kitchen, C. A. Post	36,752
Collar, F. Edelmann	36,753 to 36,756
Finger ring, H. S. Dana	36,747
Harmonica, mouth, H. Hohner	36,748
Liquid container, O. Krause	36,750
Spoons, forks, or similar articles, handle for, J. H. Hobson	36,759
Standard for lights, clocks, etc., E. L. Brainard	36,751
Tiling, A. A. Spadone	36,761

TRADE MARKS.

Automobiles and their parts, C. H. Blomstrom Motor Co.	41,963
Belts, electric, Electric Appliance Co.	41,958
Bluing, laundry, Laundry Blue Co.	41,952
Books, Lothrop Publishing Co.	41,940
Boots and shoes, leather, Retailers Specialty Mfg. Co.	41,931, 41,932
Buckles, suspender, Harris Suspender Co.	41,957
Cards, playing, New York Consolidated Card Co.	41,939
Cheese, Neufchatel, W. A. Lawrence	41,948
Cigarettes, Turkish, R. S. Bey	41,944
Cleaning or polishing compounds, H. Netheim	41,953
Coffee, A. Engelhard & Sons Co.	41,946
Cutting tools, certain named hand, Marsh Brothers Co.	41,960
Drugs and chemicals, certain named, Brunner, Mond & Co.	41,942
Embalming fluids and formaldehyde compounds, W. S. Carpenter	41,943
Food, stock, Monarch Stock Food Co.	41,951
Hammocks, I. E. Palmer	41,933
Induction coils, Varley Duplex Magnet Co.	41,962
Locks and latches, P. & F. Corbin	41,961
Lubricants, certain named, Ohio Filler & Shield Co.	41,955
Marking substances and crayons and pencils, Binney & Smith Co.	41,937
Medicines, antinarcotic, J. W. Fowlring	41,941
Metal and furniture polish, Eagle Manufacturing Co.	41,954
Milk, condensed, Sanitas Condensed Milk Co.	41,947
Pianos, Steinway & Sons	41,959
Pictures, process, A. W. Elson	41,938
Roofing, asphalt, Patent Vulcanite Roofing Co.	41,956
Silk dress goods, Stewart Silk Company	41,936
Soup making, concentrated meat and vegetable preparation for, Marmite Food Extract Co.	41,950
Spool cotton, thread, and sewing cotton, American Thread Co.	41,935
Stones, artificial, J. H. Loevenhart	41,964
Wine, F. Chauvenet	41,945
Yarns, Brown, Durrell & Co.	41,934
Yeast, New Process Yeast Co.	41,949

LABELS.

"Alta Vista," for wine, Acker, Merrall & Condit	10,695
"Boise Natural Mineral Water," for mineral water, B. H. Coleman	10,699
"Green Spring Valley," for whiskey, Elder-Harrison Co.	10,708
"Guzo Calvarian Elixir," for medicine, P. J. Guzowski	10,702
"Noxall Louse Killer," for insecticide, Vandolah & Pullins	10,701
"Ozonets," for breath perfuming candies, L. Hesselroth	10,700
"Perfect Jelly Powder," for jelly powder, O. J. Weeks & Co.	10,697
"Purock," for bottled water, Charles E. Hires Co.	10,696
"Rejuvenator Medicine Co.," for medical preparations, S. E. Tillinghast	10,703
"The Buster Brown Belt and Buckle," for belts and buckles, E. & J. Bass	10,698
"The Clipper Clip," for paper clips, Clipper Manufacturing Company	10,704
"The Fay Clip," for paper clips, Clipper Manufacturing Company	10,705
"The Gem Clip," for paper clips, Clipper Manufacturing Company	10,706
"The Niagara Clip," for paper clips, Clipper Manufacturing Company	10,707

PRINTS.

"The Candy Girl," for candy, Berrisford Candy Co.	888
"Waltham Watches," for watches, American Waltham Watch Co.	887

A printed copy of the specification and drawing of any patent in the foregoing list, or any patent in print issued since 1863, will be furnished from this office for 10 cents, provided the name and number of the patent desired and the date be given. Address Munn & Co., 361 Broadway, New York.

Canadian patents may now be obtained by the inventors for any of the inventions named in the foregoing list. For terms and further particulars address **Munn & Co., 361 Broadway, New York.**

PERFORATED METALS FOR ALL USES. MADE AS REQUIRED.
HARRINGTON & KING PERFORATING CO., 225 N. UNION ST. CHICAGO.

The Highest Efficiency



Full protected patents allowed.

is guaranteed in every one of the smooth-running

Brennan Gasoline Motors

made on the latest approved pattern, safe, sure and quick to start, economical in fuel, and of great durability. Can be used for Marine purposes.

BRENNAN MFG. CO.
SYRACUSE, N. Y., U. S. A



BARKER MOTORS

Have more good points, fewer parts and require less attention in operation than any other.

Launches, Valves, Specialties.

C. L. Barker, Norwalk, Ct.

Volt Ammeters

Pocket size, but large enough for accuracy and practical use. Various ranges for testing batteries electric light, telephone and other circuits, etc Also, Voltmeters and Ammeters for general measurements.

Send for Circular.

L. M. PIGNOLET,
80 Cortlandt St., New York, N.Y.

PALMER
MARINE and STATIONARY
MOTORS
2 and 4 CYCLE



are no experiment, as they are in successful operation in all parts of the world.
Launches in stock.
Send for Catalogue.

PALMER BROS.,
Cos Cob, Conn.
New York Office, 136 Liberty St.

ELECTRO MOTOR. SIMPLE, HOW TO make.—By G. M. Hopkins. Description of a small electric motor devised and constructed with a view to assisting amateurs to make a motor which might be driven with advantage by a current derived from a battery, and which would have sufficient power to operate a foot lathe or any machine requiring not over one man power. With 11 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **641.** Price 10 cents. To be had at this office and from all newsdealers.

The Franklin Model Shop.

Experimental work for inventors: anything in metal from a single piece to a complete working model. Apparatus for colleges. Exhibition models. Introduction samples of patented articles. Special tools for making metal novelties. Inventions perfected. Drawings and designs worked out from inventors' ideas. Send for circular 9.

PARSELL & WEED,
129-131 West 31st Street, New York.

VELOCITY OF ICE BOATS.—A COLlection of interesting letters to the editor of the SCIENTIFIC AMERICAN on the question of the speed of Ice Boats, demonstrating how and why it is that these craft sail faster than the wind which propels them. Illustrated with 10 explanatory diagrams. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **214.** Price 10 cents. To be had at this office and from all newsdealers.

Export Trade

How to Secure and How to Hold It

Valuable hints on how to secure Export Trade sent gratis on request. Address

EXPORT EXPERT
Box 773, New York

MODELS CHICAGO MODEL WORKS 178 E. MADISON ST. CHICAGO, ILL. ESTABLISHED 1867 WRITE FOR CATALOGUE OF MODEL SUPPLIES.

BUILDERS of Special Machinery. Models, Experimental work. Inventions developed. THE FENN-SADLER MACH. CO., Hartford, Conn.

DIES, TOOLS, MODELS and Special Machinery, Metal Specialties and Stampings manufactured. **HOEFT & MOORE,** 85-87 Fifth Ave., Chicago, Ill.

TOOLS AND DIES. **CHAS. E. KUSIAN, INVENTIONS DEVELOPED. 175 GRAND STREET, N.Y.** SPECIAL MACHINERY.

ROTARY PUMPS AND ENGINES. Their Origin and Development.—An important series of papers giving a historical resume of the rotary pump and engine from 1588 and illustrated with clear drawings showing the construction of various forms of pumps and engines. 88 illustrations. Contained in SUPPLEMENTS **1109, 1110, 1111.** Price 10 cents each. For sale by Munn & Co. and all newsdealers.

Telegraphy Circular free. Wonderful automatic teacher. 5 styles, **$2 up.** **OMNIGRAPH CO., 52, 39 Cortlandt St., N. Y.**

WE HAVE BUILT SLOT MACHINES of all kinds for 15 years. Can improve, perfect, develop or build yours in quantities. *Write us.* **MICHIGAN NOVELTY WORKS, Kalamazoo, Mich.**

WORK WELL TELEPHONES Best on Earth for the money, **$7.50** pair. Send for circular. **S. H. Couch Co.,** 170 Pearl St., Boston, Mass.

DRAWING. Mechanical and Patent Office Drafting taught by mail. Write F. D. Lewis, 136 Liberty St., N. Y.

PLAYS Dialogues, Recitations and other Entertainments. Send for *free catalogue* of over 2,000 plays. **The Dramatic Publishing Co.** **358 Dearborn St., Chicago, or 40 W. 28th St., New York**

Send $1.00 for 25 Pure RESAGOS HAVANA CIGARS

Your Money Back if Not Satisfactory

This is the introductory offer for our Resagos Havana Cigar. We will send them to you, charges prepaid, and you can **sample them free.** If they are not fully up to your expectations, return them to us—any express company will tell you we accept returns without question and pay express charges both ways. We don't want your money unless you're fully satisfied

We have built up the largest trade in *genuine* **Havana Cigars** in this country—**saving you the profits of salesman, jobber and dealer.**

Write for booklet showing our liberal special offers on pure Havana Cigars from $4 to $15 per 100, and we will send you the names of prominent individuals and clubs in every State in the Union who are our pleased customers.

References: State Bank, New York City; Bradstreet's or Dun's.

La Reclama Cuban Factory
1804 FIRST AVE., NEW YORK CITY
Established 1875

5-inch Full Weight

? Do you know of anywhere else in the World where you can get 25 FINE HAVANA SECUNDAS CIGARS for $1.00

5-inch Full Weight

NORTH AMERICAN INVESTORS, MANUFACTURERS and EXPORTERS

who desire to have reliable information about business matters in Argentine, Uruguay and Paraguay, may communicate with

MR. A. SERAFINI,
Rivadavia St. 775, Buenos Aires, Argentine Republic

who will give, free of charge, all desirable information by letter or when he comes to the United States in May next, when he can be seen at the Produce Exchange Bldg., New York. Office of the Consul General.

SPECIAL MANUFACTURING. DIES AND STAMPINGS TO ORDER.
SPEC'L MACHINERY-MODELS-EXPERIMENTAL WORK. DROP FORGING DIES AND DROP FORGINGS. HARDWARE SPECIALTIES ETC. MANF'D TO ORDER. SEND SAMPLES OR DRAWINGS FOR ESTIMATES. WRITE FOR OUR BOOKLET.
THE GLOBE MACHINE & STAMPING CO. 970 HAMILTON ST., CLEVELAND, OHIO.

AUTOMOBILE Parts. We are prepared to manufacture gasoline engines, transmissions, carburetors, pumps, lubricators, axles. Also complete gasoline cars. Sheet metal stamping. General machine work. Good facilities. 30 years' experience. **OTTO KONIGSLOW, Cleveland, Ohio.**

MODEL AND EXPERIMENTAL WORK.
Electrical and Mechanical Instruments. Small Mach'y.
EDWARD KLEINSCHMIDT, 82 W. Broadway, New York.

SPECIAL MACHINERY Tools and Dies. Model & Experimental Work. **Costilo Machine Works,** 60 Centre St., New York.

Are you interested in Patents, Model or Experimental work? Our booklet entitled

WHAT WE DO—HOW WE DO IT

will be sent to you on request.
KNICKERBOCKER MACHINE WORKS, Inc., 8-10-12 Jones Street, New York.

MODELS & EXPERIMENTAL WORK. Inventions developed. Special Machinery. **E. V. BAILLARD, Fox Bldg., Franklin Square, New York.**

FLY PAPERS.—FORMULAS FOR Sticky Fly Papers are contained in SCIENTIFIC AMERICAN SUPPLEMENT Nos. **1057** and **1324.** Each issue contains several recipes. Price 10 cents each, from this office, and from all newsdealers.

DRYING MACHINES. S. E. WORRELL, Hannibal, Mo.

ICE MACHINES, **Corliss Engines,** Brewers' and Bottlers Machinery THE VILTER MFG. CO., 899 Clinton St., Milwaukee, Wis.

MODELS & GEARS CATALOGUES FREE. UNION MODEL WORKS 193 CLARK CHICAGO.

WANTED

Patent Office Draughtsmen. Only thoroughly experienced men need apply. Must show specimens of patent drawings.

MUNN & CO., Scientific American Office.
361 Broadway, New York.

SPECIALISTS. COUNTING, VOTING, SLOT & SPECIAL MACHINERY. GRANT MACHINE CO. BRIDGEPORT, CONN.

National Supply Co., 835 Broadway, N.Y.
Model Makers and Manufacturers of PATENTED ARTICLES, ETC.

Especial Quality in Steel Castings. "SEABOARD" STEEL CASTINGS show physical qualities equal to the finest forgings. Our raw material is most carefully selected and our PRODUCT fills the highest requirements. OPEN HEARTH STEEL CASTINGS, for locomotive, shipbuilding, electrical, pump and general machinery purposes. Subject to U. S. Government, Lloyd's, Railroad and other specifications.
SEABOARD STEEL CASTING CO., Chester, Pa.

© 1904 SCIENTIFIC AMERICAN, INC.

THE WINTON MOTOR CARRIAGE CO., Cleveland, U.S.A.

Orient Buckboard



Model of 1904. **With TWO SPEED. Price $425.**
Write for Catalogue.
WALTHAM MFG. CO., Waltham, Mass.

MAGIC LANTERNS **STEREOPTICONS** and Moving Picture Machines. Write and we will tell you how to give entertainments that **PAY** Catalogue **FREE.**
McALLISTER, Mfg. Optician, 49 Nassau Street, New York.

ELECTRIC SEWING MACHINE MOtor.—The instructions and numerous illustrations of details contained in this article will enable any mechanic of average ability to build an efficient motor that will operate a sewing machine. The cost of materials for this machine should not exceed five dollars. See SCIENTIFIC AMERICAN SUPPLEMENT, No. **1210.** Price 10 cents by mail, from this office and from all newsdealers.

Price $15.



GAS ENGINE IGNITERS

for Marine, Stationary and Automobile engines. Will save their cost many times over in one year.
Write for circulars.
The Carlisle & Finch Co.,
233 E. Clifton Ave., Cincinnati, O

JESSOP'S STEEL THE VERY BEST FOR TOOLS, SAWS ETC.
WM JESSOP & SONS LTD 91 JOHN ST. NEW YORK

TO MINE OWNERS

You need a **Hoisting Engine.** You want the best, strongest, safest, most up-to-date engine that is made—the most durable and yet the greatest saver of money. Send for our free catalogue and state the size of engine you want. We build them for mines, quarries and docks. Both friction and geared hoist, 6 to 150 H. P.



All parts easily interchangeable. **WEBER GAS & GASOLINE ENGINE CO. P. O. Box 1114-a, Kansas City, Mo.**
EASTERN OFFICE, 115 Liberty Street, New York City.

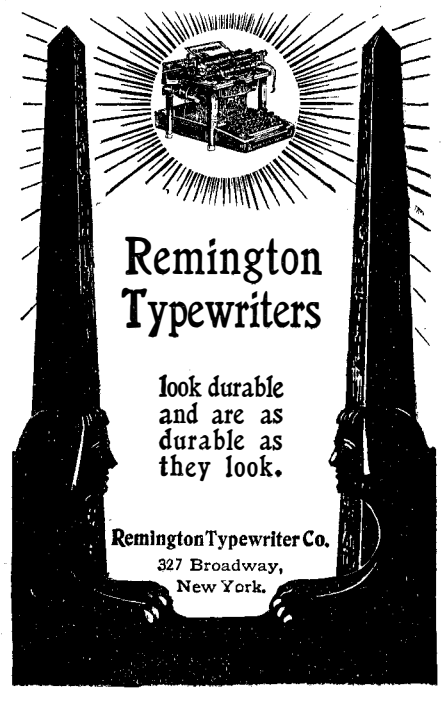

SPECIAL LOW RATES via THE NICKEL PLATE ROAD
to points in the West and Southwest. One way Colonist, and round trip Homeseekers' tickets on sale first and third Tuesdays of February, March and April. Homeseekers' tickets good 21 days returning. See local agents or write A. W. Ecclestone, D. P. A., 385 Broadway, New York City.

PATENT AERIAL



WIRE ROPE TRAMWAY

HERCULES WIRE ROPE (Trade Mark Registered.)

For Transportation of Ore, Coal, Dirt, Timber, etc.
Perfect Grip Clip. Absolutely Safe. Loads Automatically. Unloads Automatically. Operated by One Man. Cost of Maintenance Low. Capacity Largest Obtainable.
A. LESCHEN & SONS ROPE COMPANY. Home Office, 920-922 North First Street, St. Louis, Mo.
Branch Offices, 92 Centre Street, New York City, N. Y. 1717-23 Arapahoe St., Denver, Colo. 137 E. Lake Street, Chicago, Ill. Rialto Building, cor. New Montgomery & Mission Streets, San Francisco, Cal.

We manufacture **Running Gears & Gasoline Engines** and supply all the other parts. Our New Catalogue Free.

NEUSTADT-PERRY CO.
826-828-830 S. 18th St.
St. Louis, Mo.



The **Light Running YOST** is easy to operate.
Its **Beautiful Work** is easy to read.
Our **Unusual Catalogue** is easy to understand.
Why not send for the UNUSUAL CATALOGUE and learn of the BEAUTIFUL WORK done by the LIGHT RUNNING YOST? Sent free.
YOST WRITING MACHINE CO., 245 B'way, New York.

Our Specialty: Knock-Down Boats of any description



AMERICAN BOAT & MACHINE CO.,
ROW, SAIL AND PLEASURE BOATS,
Marine Station. ST. LOUIS, MO.

GARDNER DIE STOCK
C. H. BESLY & CO. CHICAGO ILL. U.S.A.
115 to 21 Clinton Street.

Buy from Our Factory SAVE A THIRD

Our plan of selling direct to user cuts out two profits and saves a third on retail prices. Our assortment of carriages and harness is larger than any dealer can show you. We guarantee all our goods. We are bona-fide manufacturers—not a commission house. Send for our free illustrated catalogue.

THE COLUMBUS CARRIAGE AND HARNESS CO., Columbus, Ohio.

Telescopes

We supply equatorially mounted *Astronomical Telescopes* for amateur purposes. Our **OBJECTIVES** are absolutely guaranteed to be optically perfect.
GUNDLACH-MANHATTAN OPT. CO., Rochester, N. Y.

ACETYLENE GAS AND CARBIDE OF Calcium.—All about the new illuminant, its qualities, chemistry, pressure of liquefaction, its probable future, experiments performed with it. A most valuable series of articles, giving in complete form the particulars of this subject. Details of furnaces for making the carbide, gas generators, gasometers, burners, etc. Contained in SCIENTIFIC AMERICAN SUPPLEMENT Nos. **998, 1004, 1007, 1012, 1014, 1015, 1016, 1022, 1035, 1038, 1052, 1064, 1071, 1072, 1082, 1083, 1084, 1085, 1086, 1104, 1124, 1132, 1149, 1150, 1203, 1204, 1206** and **1209.** Price 10 cents each, by mail, from this office, and all newsdealers

YourTelephone

DOESN'T RING LOUD ENOUGH?



THE G-D DROP Placed on front of 'phone rings a battery bell of any size, located any place you choose until 'phone is answered. No magnets. Pamphlet "D" free on request.

Sent postpaid for **One Dollar.** | **GARTON-DANIELS CO.** KEOKUK, IA.

TYPEWRITER HEADQUARTERS

332 Broadway, New York, sell all makes under half-price. Don't buy before sending for samples of writing, prices, exchange and unprejudiced advice. Immense stock for selection. Shipped for trial. Guaranteed first-class condition. Dealers supplied.

Squabs Pay Beat Hens
Easier, need attention only part of time, bring big prices. Raised in one month. Attractive for poultrymen, farmers, women. Send for **FREE BOOKLET** and learn this *immensely rich home industry.*
Plymouth Rock Squab Co., 14 Friend St., Boston, Mass.

MORROW



Protect Your Life and the Lives of Others
The only dependable coaster brake. Durable and safe always. Specify it. **Not an experiment.** Send for literature to-day. Thousands in use.

Morrow Trade-Mark

ECLIPSE MACHINE CO., Elmira, N. Y.

CHARTER



GAS and GASOLINE
For All Work.
Stationaries, Portables, Hoisters, Pumpers, Sawing & Boat Outfits.
Send for Catalogue and Testimonials.
State Your Power Needs.
CHARTER GAS ENGINE CO., Box 148, STERLING, ILL.

Scales All varieties at lowest prices. Best Railroad Track and Wagon or Stock Scales made. Also 1000 useful articles, including Safes, Sewing Machines, Bicycles, Tools, etc. Save Money. Lists Free. CHICAGO SCALE CO., Chicago, Ill

MICROSCOPES

Our Microscopes, Microtomes, Laboratory Glassware, Chemical Apparatus, Chemicals, Photo Lenses and Shutters, Field Glasses, Projection Apparatus, Photo-Micro Cameras are used by the leading Laboratories and Government Departments Round the World. Catalogs free.

Bausch & Lomb Opt. Co.
ROCHESTER, N. Y.
New York Chicago Boston Frankfurt, G'y

SPINTHARISCOPE

Sir Wm. Crookes' invention for showing the marvelous properties of **RADIUM.** Also **Spinthariscope Slide** for viewing the phenomena with any microscope. Each instrument is complete with particle of radium of 300,000 activity, and fluorescent screen.

R1. Spinthariscope Slide, post paid, - - $7.50
R2. Complete Spinthariscope, post paid, 9.00

Also **Radium** from 7,000 to 300,000 activity for experimental and medical purposes in protected metal bulbs.

WILLIAMS, BROWN & EARLE,
Dept. 6. 918 Chestnut St., Philadelphia, Pa.

NEW ENGLAND WATCHES

THE NEW SCOUT

Fourteen Size, Thin Model. In a Nickel Silver Screw Case. Non-Magnetic. Dust and Water Proof. The latest, up-to-date watch that is compact, strong and every way convenient.
Ready for Delivery, January, 1904.

THE NEW ENGLAND WATCH CO.
37 Maiden Lane NEW YORK
131 Wabash Av. CHICAGO
Spreckels Building SAN FRANCISCO
7 Snow Hill LONDON

EVOLUTION OF THE AMERICAN LOcomotive.—By Herbert T. Walker. A valuable series by a member of the National Railway Museum Committee. The locomotive from 1825 to date is described and illustrated by careful drawings, great attention being given to historical accuracy. 21 illustrations. SCIENTIFIC AMERICAN SUPPLEMENTS **1112, 1113, 1114.** Price 10 cents each. For sale by Munn & Co. and all newsdealers.

COLD GALVANIZING.

AMERICAN PROCESS. NO ROYALTIES.
SAMPLES AND INFORMATION ON APPLICATION.

SEND YOUR BUSINESS CARD FOR CATALOGUE.



NICKEL AND Electro-Plating Apparatus and Material.
THE **Hanson & VanWinkle Co.,**
Newark, N. J.
92 William St., N. Y.
30 & 32 S. Canal St. Chicago.

Pope Manufacturing Co.

Famous Chainless Bicycles

Equipped with two-speed gear, coaster brake, and cushion frame

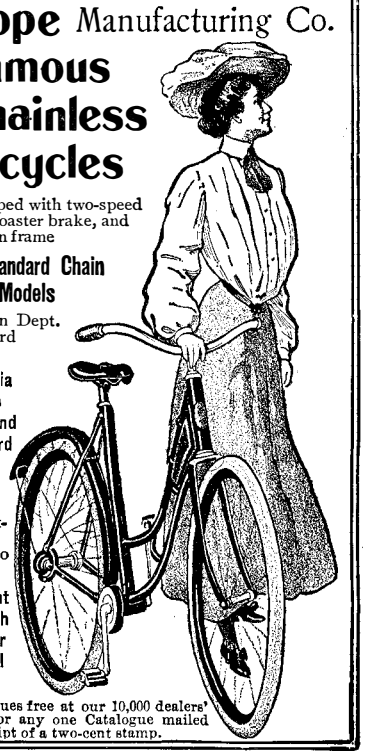

All Standard Chain Models
Eastern Dept. Hartford Conn.
Columbia
Tribune
Cleveland
Crawford
Western Department Chicago Ill.
Crescent
Monarch
Rambler
Imperial

Catalogues free at our 10,000 dealers' stores, or any one Catalogue mailed on receipt of a two-cent stamp.

LAMBERT

Better than many. Equal to any. Price, $25. A "Wireless" Machine. Simplest lightest, most practicable and durable low-priced typewriter on the market. Price, complete in portable case, $25. Description booklet free.

LAMBERT TYPEWRITER CO.
1274 Broadway, N. Y. 86 La Salle St., Chicago
BAKER & HAMILTON, 'Frisco, *Agts, Pacific Coast*
Main Office and Factory
79-83 Washington St., Brooklyn, N. Y.

HOW TO MAKE AN ELECTRICAL Furnace for Amateur's Use.—The utilization of 110 volt electric circuits for small furnace work. By N. Monroe Hopkins. This valuable article is accompanied by detailed working drawings on a large scale, and the furnace can be made by any amateur who is versed in the use of tools. This article is contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **1182.** Price 10 cents. For sale by MUNN & Co., 361 Broadway, New York City, or by any bookseller or newsdealer

YOUR EYE

RIGHT HERE!

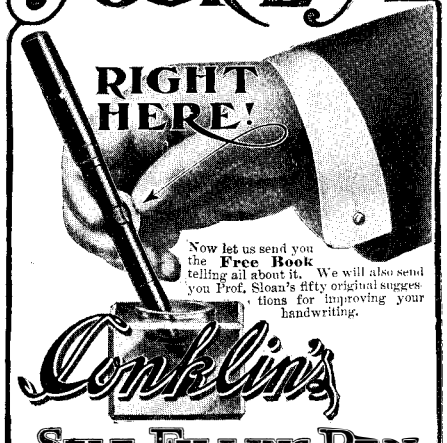

Now let us send you the **Free Book** telling all about it. We will also send you Prof. Sloan's fifty original suggestions for improving your handwriting.

Conklin's SELF-FILLING PEN
"The Pen That Fills Itself"
Dip pen in any ink well or any ink, press lever and operation is over. As a matter of cleanliness, comfort and convenience don't you owe it to yourself to learn more about this perfect pen?
If you will let us send you our beautiful new illustrated catalogue, it will make you a CONKLIN enthusiast.
The Conklin Pen Co. 111 Madison Ave. Toledo, Ohio
Represented in Great Britain by American Agencies, Ltd., 38 Shoe Lane, Farringdon St., London, E. C.: in Australia by Rae, Munn & Gilbert, 47 Market St., Melbourne.

Typewriter Supplies

Cheapest and Best Typewriter Ribbons on the Market

Finest Carbon Paper that can be manufactured **at Lowest Possible Prices**

SPECIAL PRICES TO THE TRADE

H. M. STORMS, 11-13 Vandewater Street, New York

PRESIDENT SUSPENDERS

Comfort and service. Guaranteed—"All breaks made good." 50c and $1.00. Any shop or by mail. C. A. EDGARTON MFG. CO., Box 222, Shirley, Mass.

© 1904 SCIENTIFIC AMERICAN, INC.